
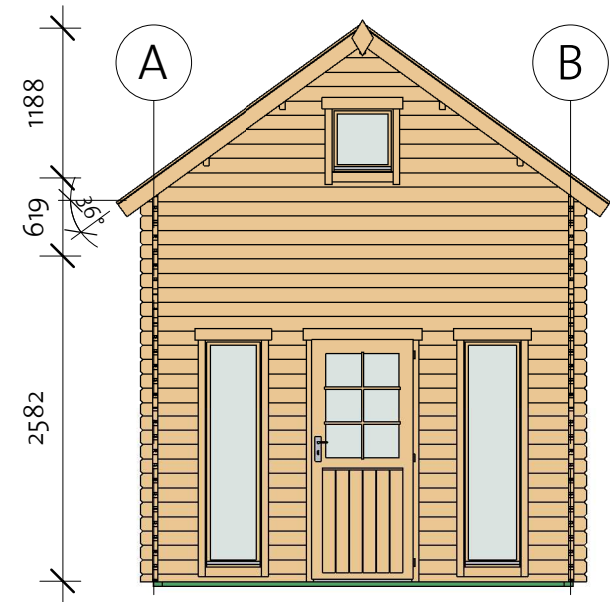



Colwood Bunkie 40 (335x299)

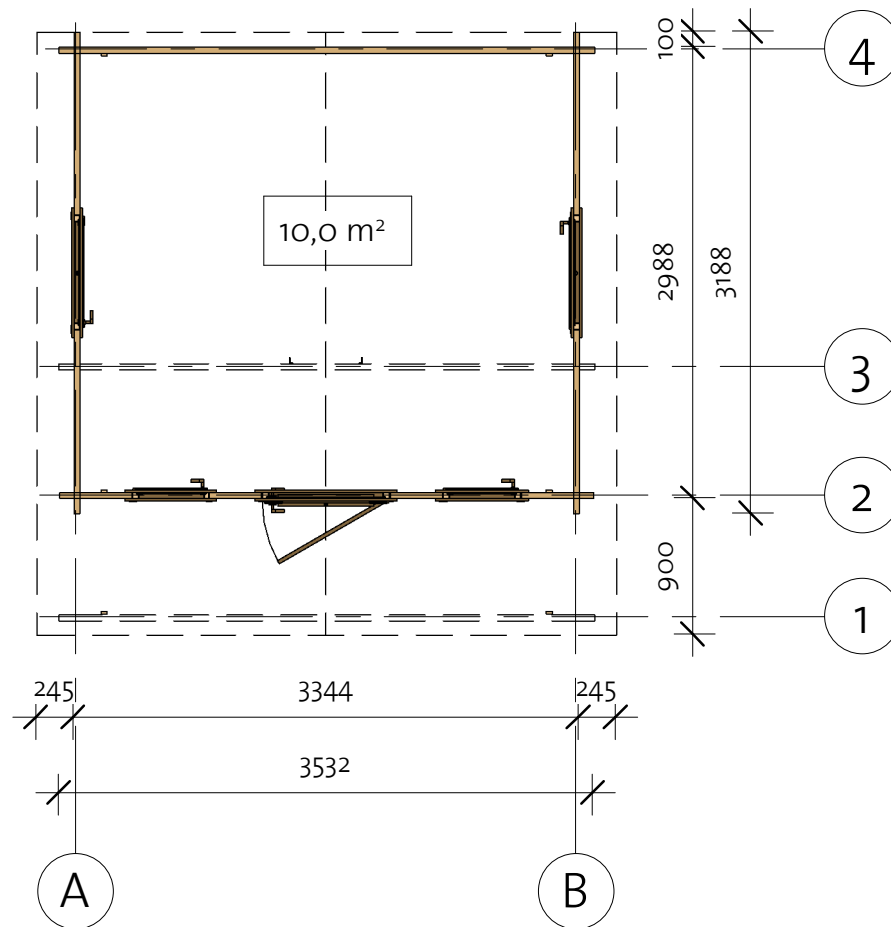

Project Number

Colwood Bunkie 40 (335x299)

Foundation

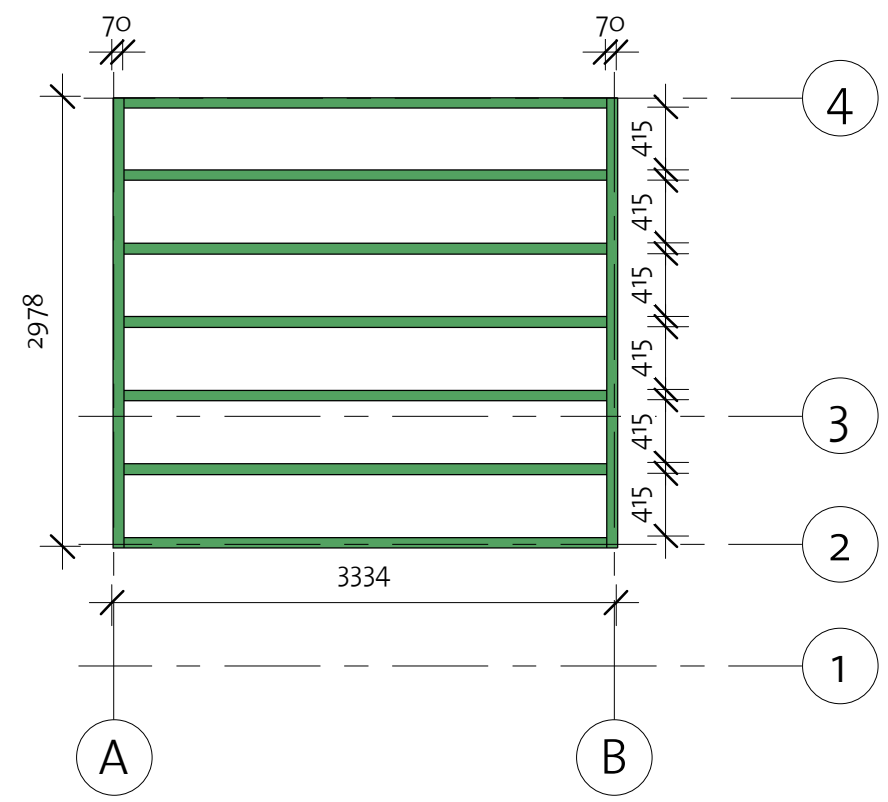


Impregnated foundation beams				
Mark	Type	Profile	Count	Length


IFB1	IFB 70x40		2	2978
IFB2	IFB 70x40		7	3194

Colwood Bunkie 40 (335x299)

Floor Plan


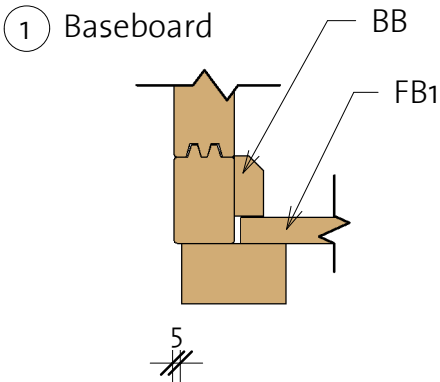


Floor Schedule				
Mark	Type	Profile	Count	Length
FB1	FB 17x114		30	2900
FB2	FB 17x114		30	1645
BB1	BB 20x40		3	3350
BB2	BB 20x40		3	3000

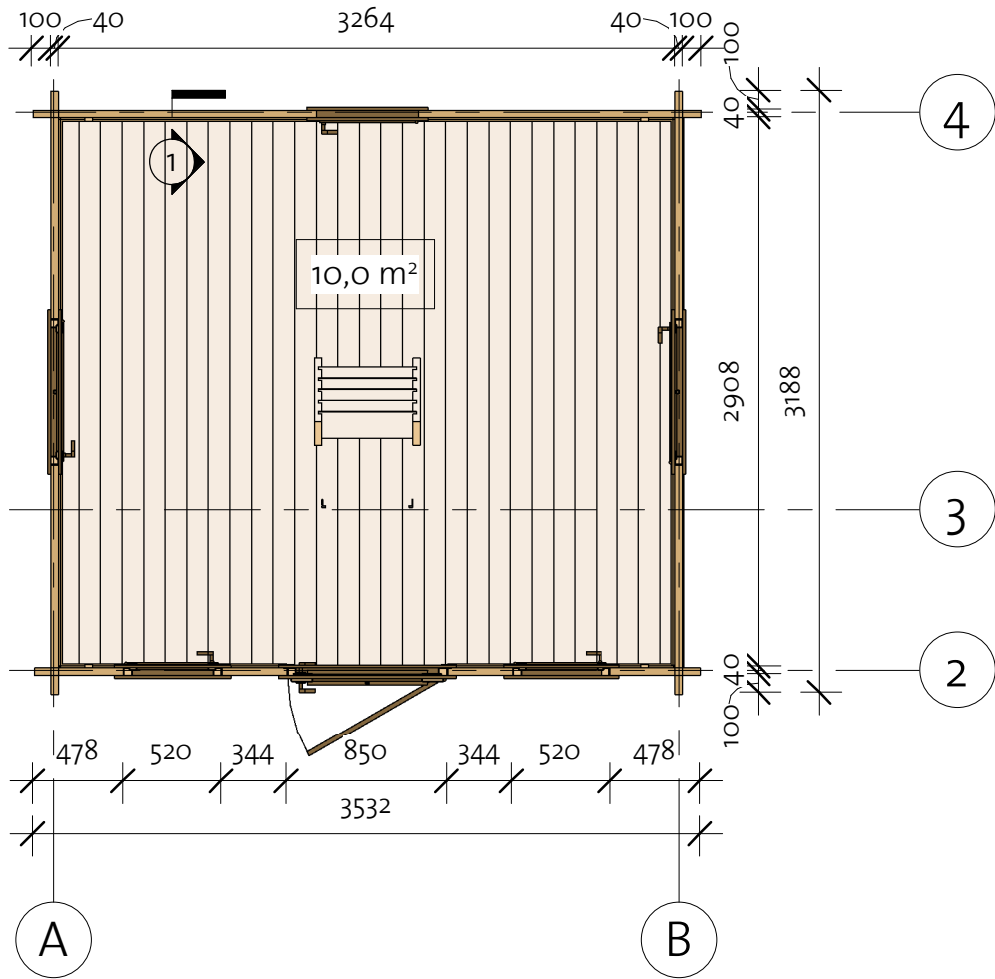

Colwood Bunkie 40 (335x299)

Wall 1

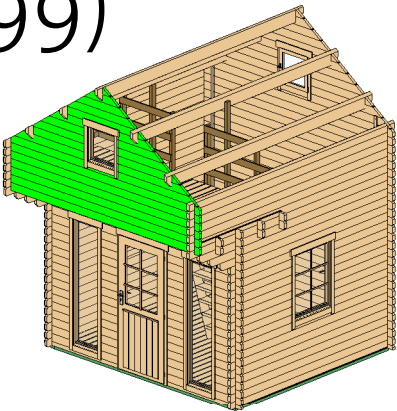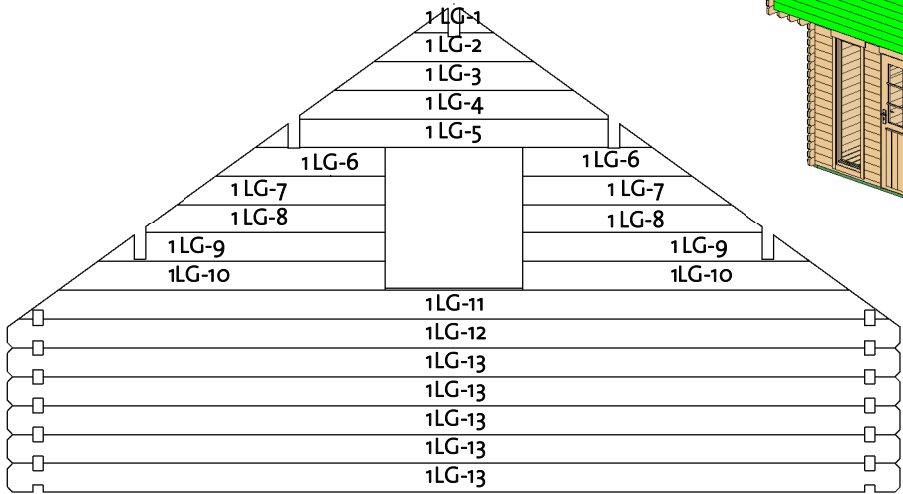

Wall 1			
Mark	Profile	Count	Cut Length

1LG-1 *	40X114	1	315
1LG-2 *	40X114	1	630
1LG-3 *	40X114	1	944
1LG-4 *	40X114	1	1221
1LG-5 *	40X114	1	1572
1LG-6 *	40X114	2	671
1LG-7 *	40X114	2	828
1LG-8 *	40X114	2	953
1LG-9 *	40X114	2	1142
1LG-10 *	40X114	2	1299
1LG-11 *	40X114	1	3458
1LG-12 *	40X114	1	3544
1LG-13	40X114	5	3544

* Gable - delivered premounted


Log Profile Wall 1

Profile	Profile
---------	---------

40X114	
--------	---


Colwood Bunkie 40 (335x299)

Wall 2

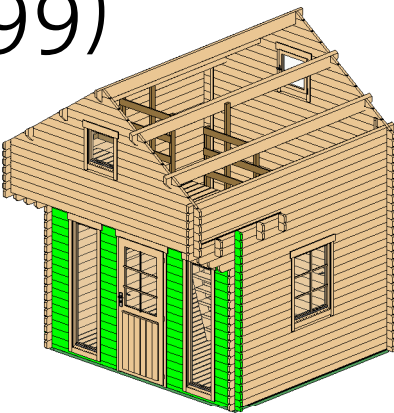

Wall 2			
Mark	Profile	Count	Cut Length

2BL-1	40X57	2	1347
2LG-1	40X114	34	344
2LG-2	40X114	34	484
2LG-3	40X114	4	3544
2LG-4	40X114	1	3544


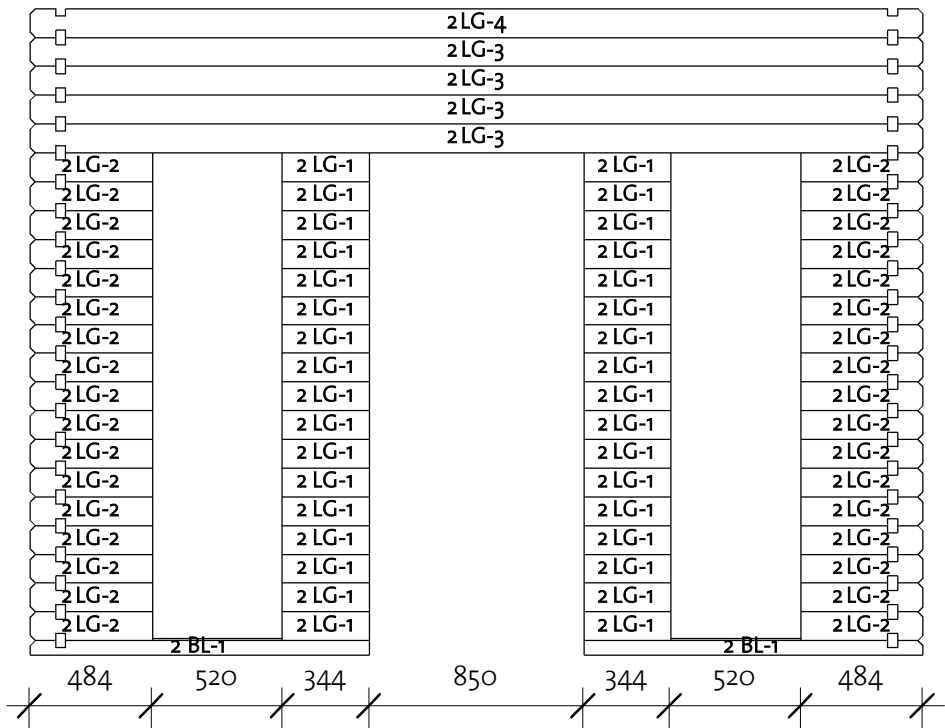


Log Profile Wall 2	
Profile	Profile

40X57	
40X114	

Colwood Bunkie 40 (335x299)

Wall 3

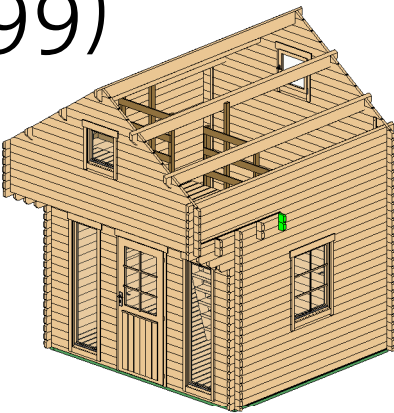

Wall 3			
Mark	Profile	Count	Cut Length



3LG-1	40X114	1	3544
3LG-2	40X114	1	3544

Log Profile Wall 3	
Profile	Profile

40X114	
40X114	

Colwood Bunkie 40 (335x299)

Wall 4

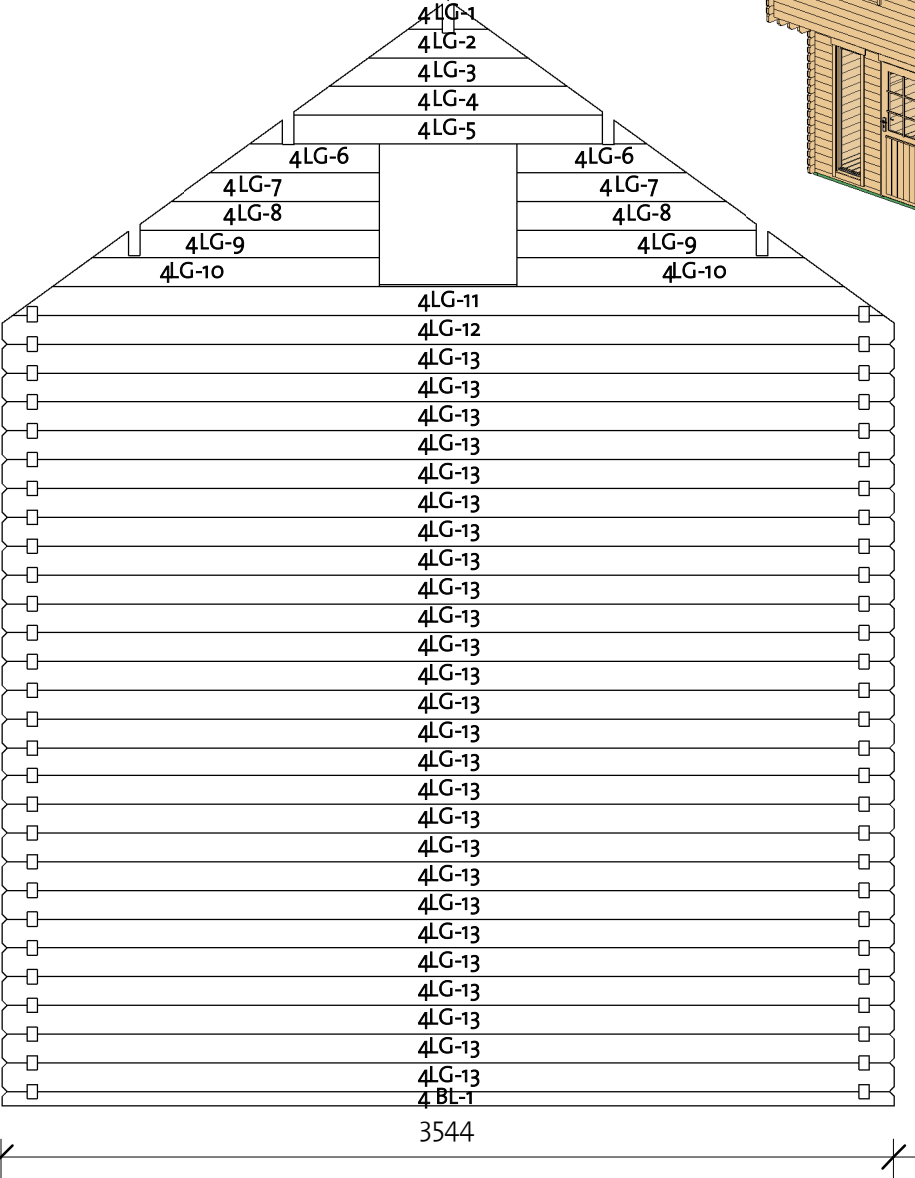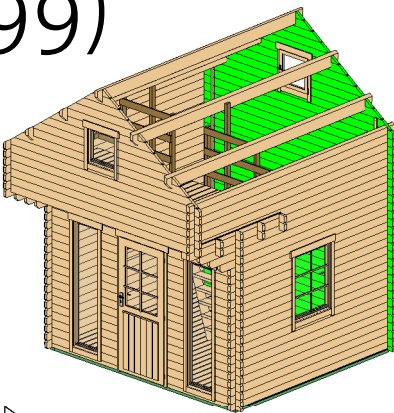

Wall 4			
Mark	Profile	Count	Cut Length

4BL-1	40X57	1	3544
4LG-1 *	40X114	1	315
4LG-2 *	40X114	1	630
4LG-3 *	40X114	1	944
4LG-4 *	40X114	1	1221
4LG-5 *	40X114	1	1572
4LG-6 *	40X114	2	671
4LG-7 *	40X114	2	828
4LG-8 *	40X114	2	953
4LG-9 *	40X114	2	1142
4LG-10 *	40X114	2	1299
4LG-11 *	40X114	1	3458
4LG-12 *	40X114	1	3544
4LG-13	40X114	26	3544



* Gable - delivered premounted

Log Profile Wall 4	
Profile	Profile

40X57	
40X114	

Colwood Bunkie 40 (335x299)

Wall A

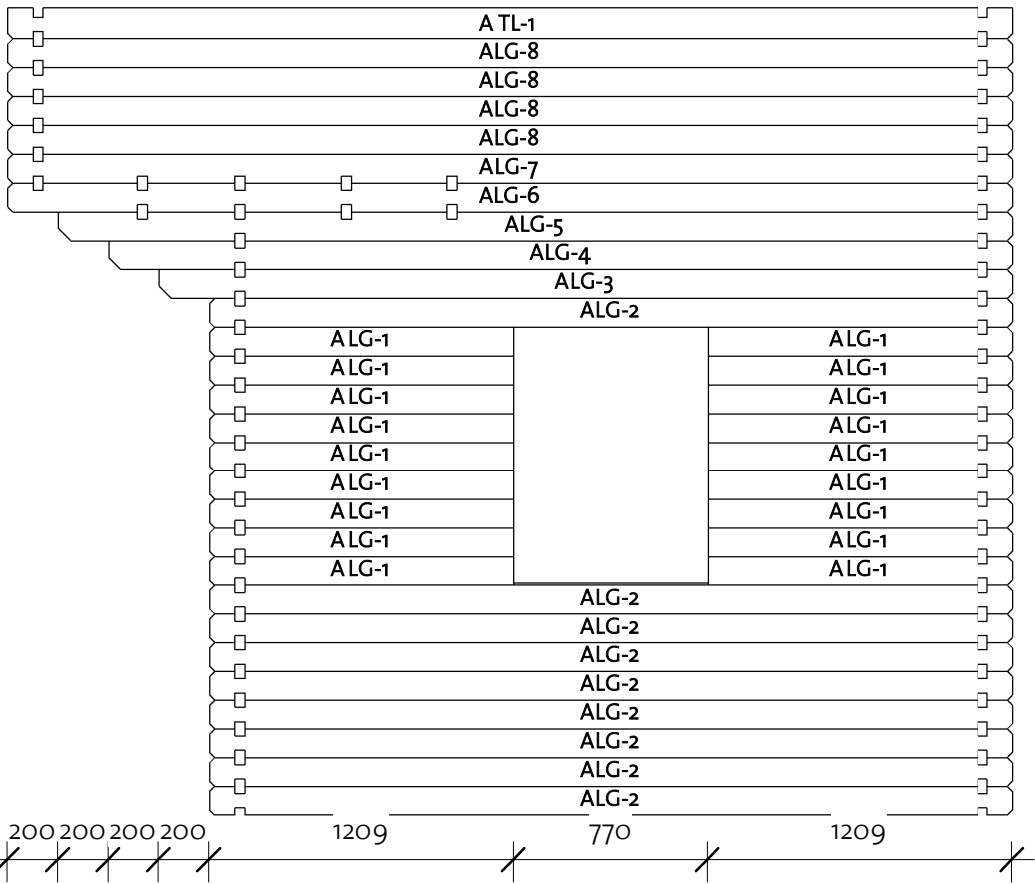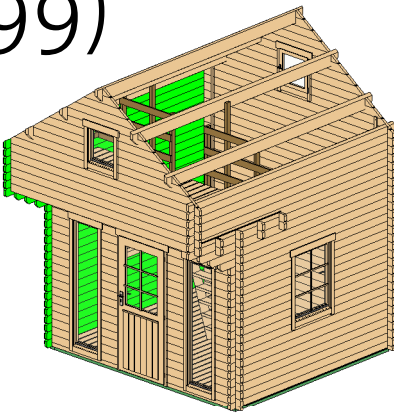

92309152_230915

Wall A			
Mark	Profile	Count	Cut Length



ALG-1	40X114	18	1209
ALG-2	40X114	9	3188
ALG-3	40X114	1	3388
ALG-4	40X114	1	3588
ALG-5	40X114	1	3788
ALG-6	40X114	1	3988
ALG-7	40X114	1	3988
ALG-8	40X114	4	3988
ATL-1	40X123	1	3988

Log Profile Wall A	
Profile	Profile

40X114	
40X123	

Colwood Bunkie 40 (335x299)

Wall B

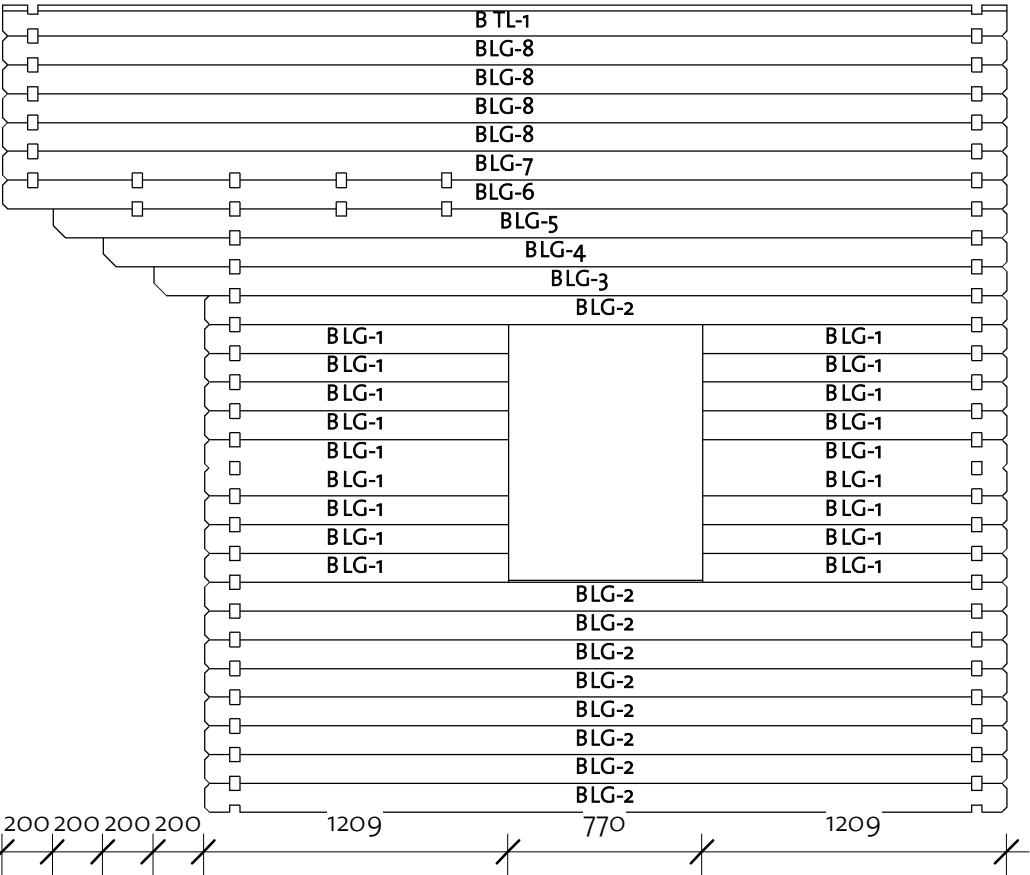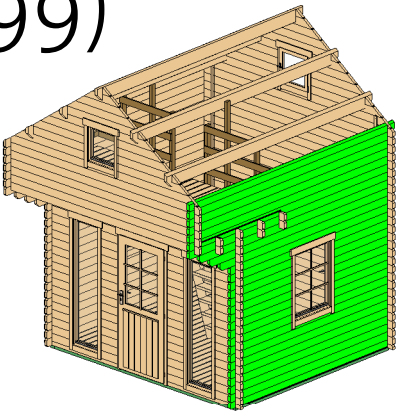

92309152_230915

Wall B			
Mark	Profile	Count	Cut Length


BLG-1	40X114	18	1209
BLG-2	40X114	9	3188
BLG-3	40X114	1	3388
BLG-4	40X114	1	3588
BLG-5	40X114	1	3788
BLG-6	40X114	1	3988
BLG-7	40X114	1	3988
BLG-8	40X114	4	3988
BTL-1	40X123	1	3988


Log Profile Wall B	
Profile	Profile

40X114	
40X123	

Colwood Bunkie 40 (335x299)



Roof 1

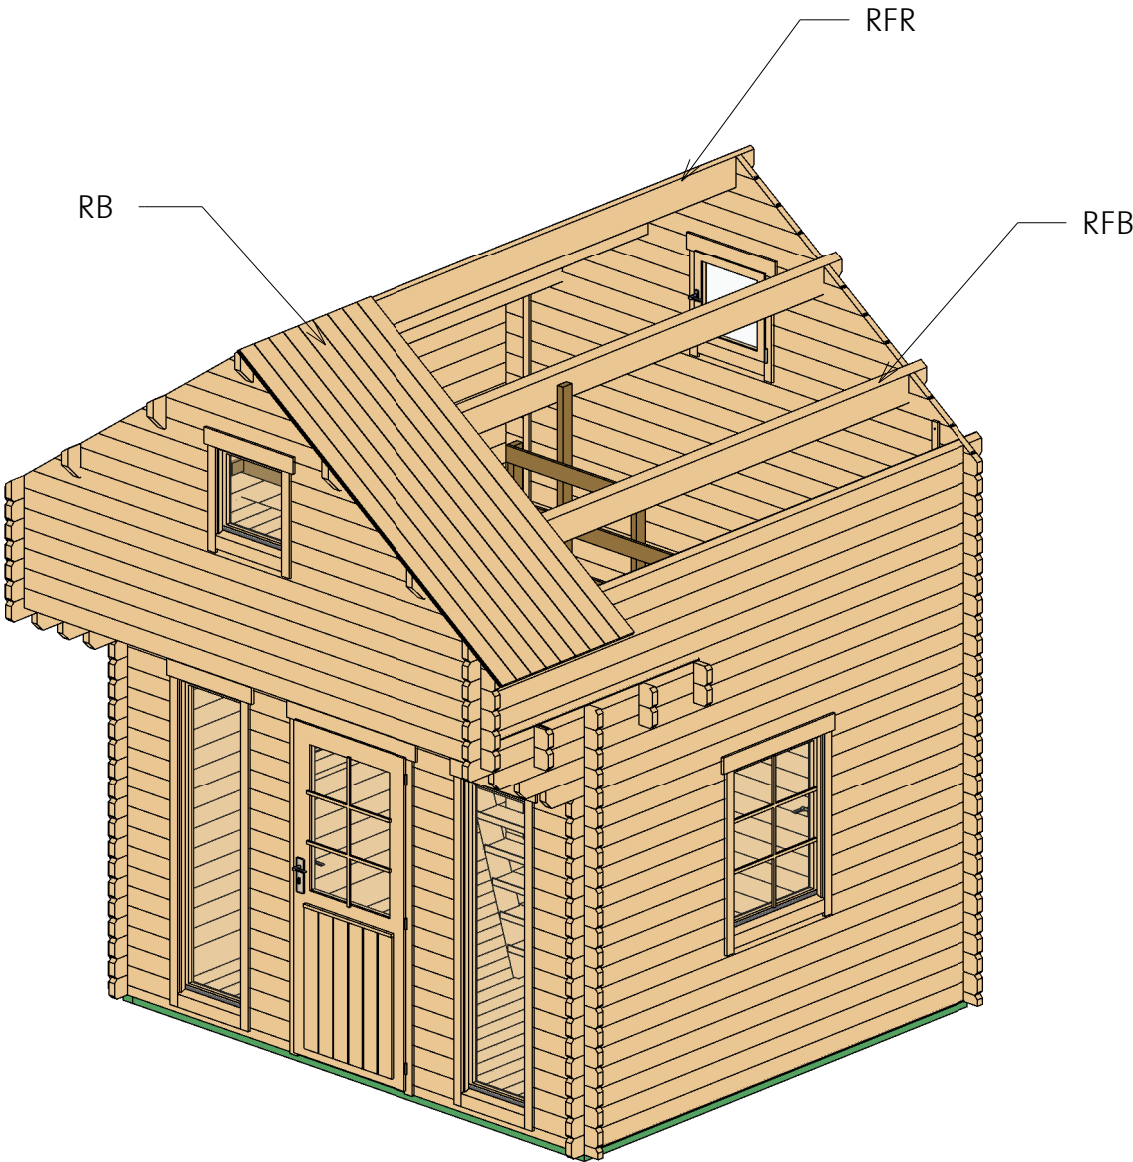


Roof				
Mark	Type	Profile	Count	Length
RFR	Ridge 45x195		1	3988
RFB	Beam 45x195		4	3988
RB	17x114		72	2368

Colwood Bunkie 40 (335x299)


Roof 2

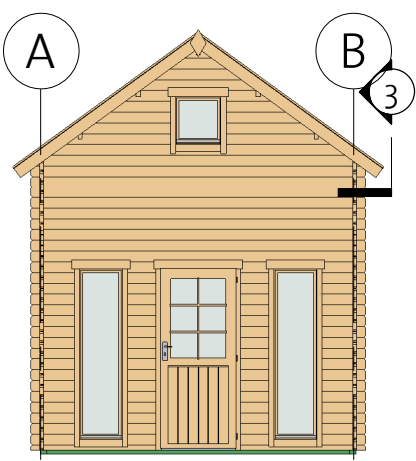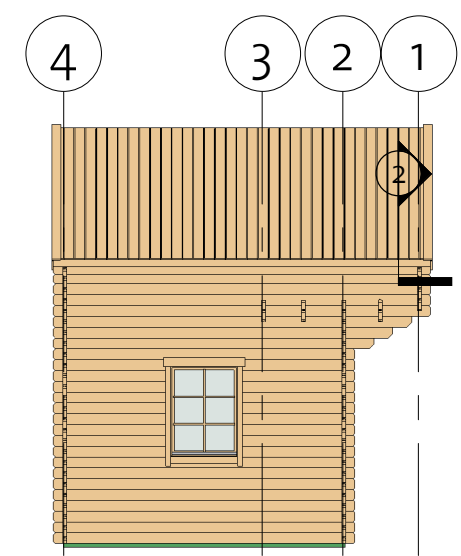

2 Facia

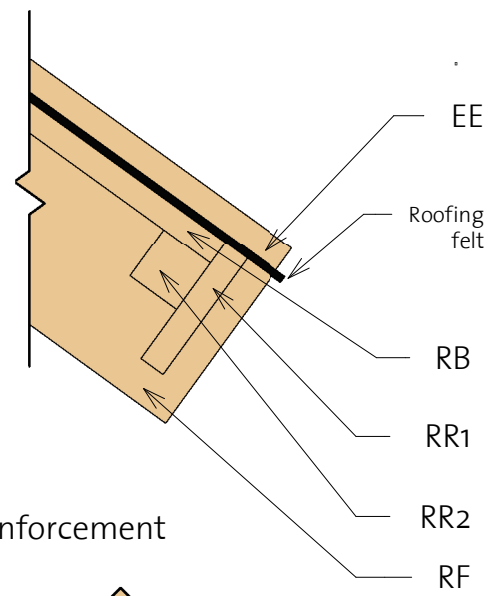


3 Roof Reinforcement

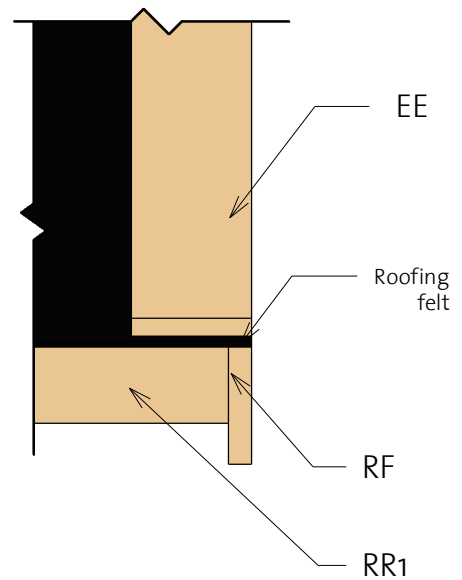


Fascia Schedule				
Mark	Type	Profile	Count	Length
EE	Eave Edging 18x95		4	2407
RF	Roof Fascia 18x120		4	2407
RR1	Roof reinforcement 18x95		2	3988
RR2	Roof reinforcement 38x38		2	3988

Colwood Bunkie 40 (335x299)


Second floor (5,4 m2)

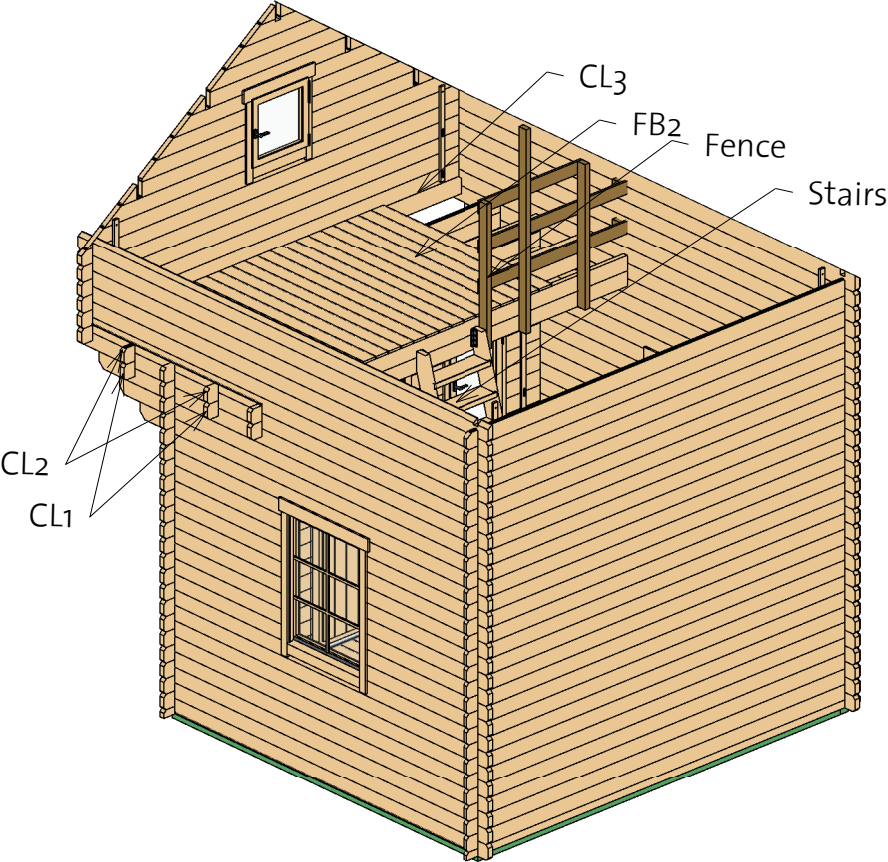

Second floor schedule				
Mark	Type	Profile	Length	Count
CL1	Log 40x114		3544	2
CL2	Log 40x114		3544	2
CL3	Log 40x114		3260	1

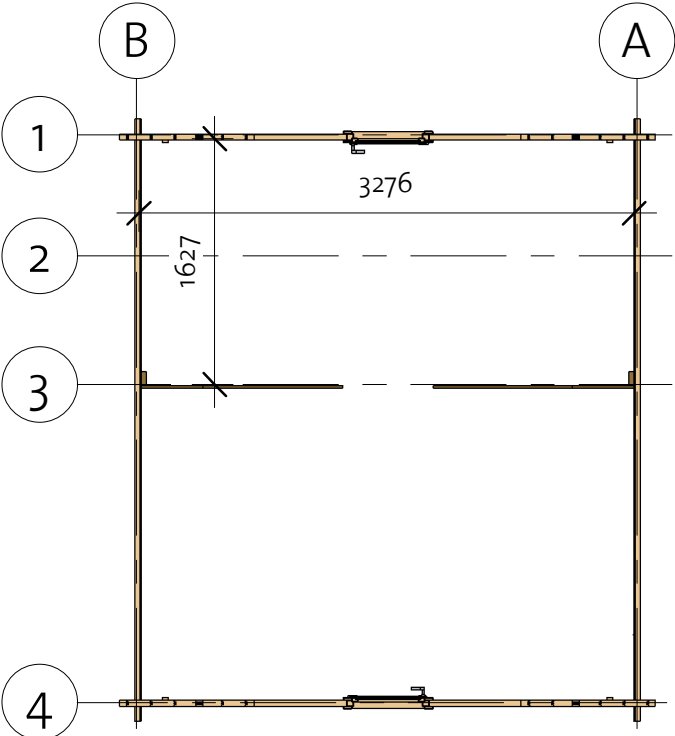


Stairs



Technical drawing of a book cover showing dimensions. The top edge is 560 units wide. The spine is 40 units wide. The bottom edge is 480 units wide. The cover is divided into 8 horizontal sections.

Colwood Bunkie 40 (335x299)

Fence

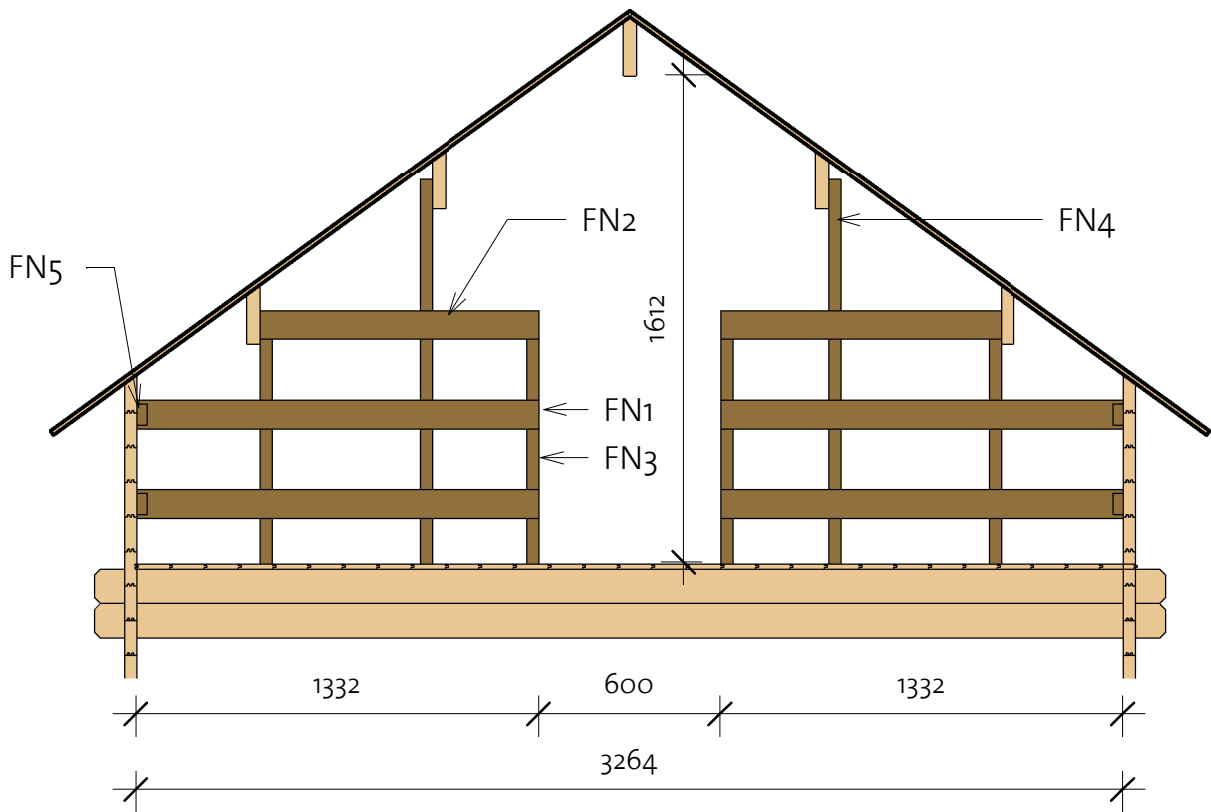

Fence schedule				
Mark	Type	Profile	Length	Count
FN1	Fence 18x95		1338	4
FN2	Fence 18x95		925	2
FN3	Fence 40x70		1079	4
FN4	Fence 40x70		1512	2
FN5	Fence 70x40		90	4

Colwood Bunkie 40 (335x299)

Extras




Door Schedule				
Model	Type	Width	Height	Count
CD4R	Classic door 4 right	840	1955	1
DCB6	Door Crossbar 6	--	--	1

Type	Count
------	-------




Windboard 18x40x700	2
Windboard 18x40x2500	2
Windboard 18x40x3200	2

Type	Count
------	-------

Romb	2
------	---



Window Schedule				
Mark	Type	Width	Height	Count
CW1R	Classic window 1 right	765	990	2
CW12R	Classic window 12, full glass righth	540	540	2
CW21R	Classic window 21 right	515	1890	2
WCB6	Windows Crossbar 6 optional	--	--	2
WCB8	Windows Crossbar 8 optional			2



Hitblock	300-400 mm		
Ladder fittings			2
Bolts	M8 x 70		16
Nails	1,4 x 40		50
Screws	6,0 x 140		65
Screws	5,0 x 70		70
Screws	4,0 x 40		885

CW21

- * Windows intended for tilt opening only!
- * Fenster zur Eröffnung nur zum Kippen vorgesehen!
- * Aknad on ette nähtud ainult kaldu avamiseks!

Colwood Bunkie 40 (335x299)

List of all items 1

Impregnated foundation beams

Mark	Type	Profile	Count	Length
IFB1	IFB 70x40		2	2978
IFB2	IFB 70x40		7	3194

Roof

Mark	Type	Profile	Count	Length
RFR	Ridge 45x195		1	3988
RFB	Beam 45x195		4	3988
RB	17x114		72	2368

Second floor schedule

Mark	Type	Profile	Length	Count
CL1	Log 40x114		3544	2
CL2	Log 40x114		3544	2
CL3	Log 40x114		3270	1

Floor Schedule

Mark	Type	Profile	Count	Length
FB1	FB 17x114		30	2900
FB2	FB 17x114		30	1645

BB1	BB 20x40		3	3350
BB2	BB 20x40		3	3000

Fascia Schedule

Mark	Type	Profile	Count	Length
EE	Eave Edging 18x95		4	2407
RF	Roof Fascia 18x120		4	2407
RR1	Roof reinforcement 18x95		2	3988
RR2	Roof reinforcement 38x38		2	3988

92309152_230915

Colwood Bunkie 40 (335x299)

List of all items 2

Stairs				
Mark	Profile	Profile	Count	Cut Length

ST1L	Stair 40x120		1	2600
ST1R	Stair 40x120		1	2600
ST2	Stair 143x40		11	520

Fence schedule				
Mark	Type	Profile	Length	Count
FN1	Fence 18x95		1338	4
FN2	Fence 18x95		925	2
FN3	Fence 40x70		1079	4
FN4	Fence 40x70		1512	2
FN5	Fence 70x40		90	4

Wall A			
Mark	Profile	Count	Cut Length

ALG-1	40x114	18	1209
ALG-2	40x114	9	3188
ALG-3	40x114	1	3388
ALG-4	40x114	1	3588
ALG-5	40x114	1	3788
ALG-6	40x114	1	3988
ALG-7	40x114	1	3988
ALG-8	40x114	4	3988
ATL-1	40x123	1	3988

Wall B			
Mark	Profile	Count	Cut Length

BLG-1	40x114	18	1209
BLG-2	40x114	9	3188
BLG-3	40x114	1	3388
BLG-4	40x114	1	3588
BLG-5	40x114	1	3788
BLG-6	40x114	1	3988
BLG-7	40x114	1	3988
BLG-8	40x114	4	3988
BTL-1	40x123	1	3988

Colwood Bunkie 40 (335x299)

List of all items 3

Wall 1			
Mark	Profile	Count	Cut Length

1LG-1 *	40X114	1	315
1LG-2 *	40X114	1	630
1LG-3 *	40X114	1	944
1LG-4 *	40X114	1	1221
1LG-5 *	40X114	1	1572
1LG-6 *	40X114	2	671
1LG-7 *	40X114	2	828
1LG-8 *	40X114	2	953
1LG-9 *	40X114	2	1142
1LG-10*	40X114	2	1299
1LG-11 *	40X114	1	3458
1LG-12 *	40X114	1	3544
1LG-13	40X114	5	3544

Wall 4			
Mark	Profile	Count	Cut Length

4BL-1	40X57	1	3544
4LG-1 *	40X114	1	315
4LG-2 *	40X114	1	630
4LG-3 *	40X114	1	944
4LG-4 *	40X114	1	1221
4LG-5 *	40X114	1	1572
4LG-6 *	40X114	2	671
4LG-7 *	40X114	2	828
4LG-8 *	40X114	2	953
4LG-9 *	40X114	2	1142
4LG-10*	40X114	2	1299
4LG-11 *	40X114	1	3458
4LG-12*	40X114	1	3544
4LG-13	40X114	26	3544

Wall 2			
Mark	Profile	Count	Cut Length

2BL-1	40X57	2	1347
2LG-1	40X114	34	344
2LG-2	40X114	34	484
2LG-3	40X114	4	3544
2LG-4	40X114	1	3544

Wall 3			
Mark	Profile	Count	Cut Length


3LG-1	40X114	1	3544
3LG-2	40X114	1	3544

* Gable - delivered premounted

Log profiles	
Profile	Profile

40X57	
40X114	
40X114	

Log profiles	
Profile	Profile


40X123	
40X123	

Windboard

① Windboard Assembly 1



② Windboard Assembly 2

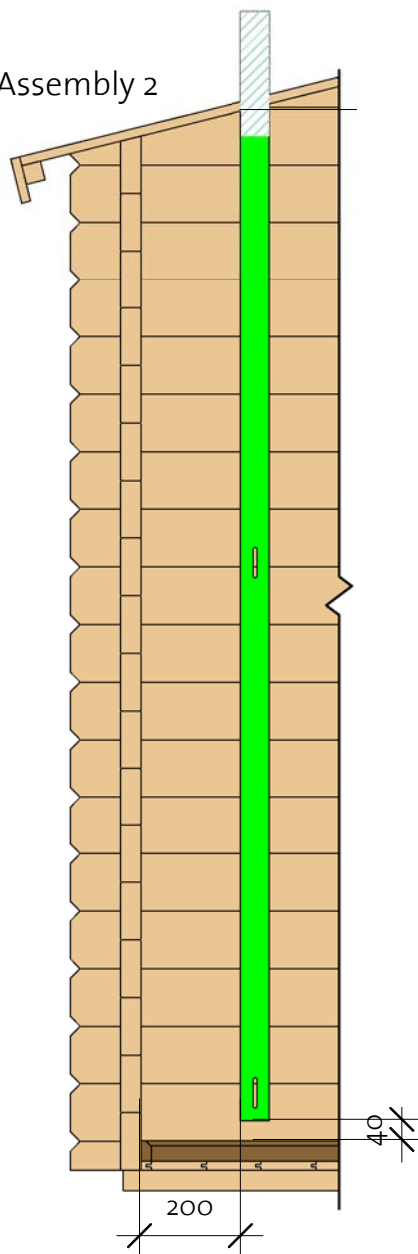

③ Windboard Assembly 3

