

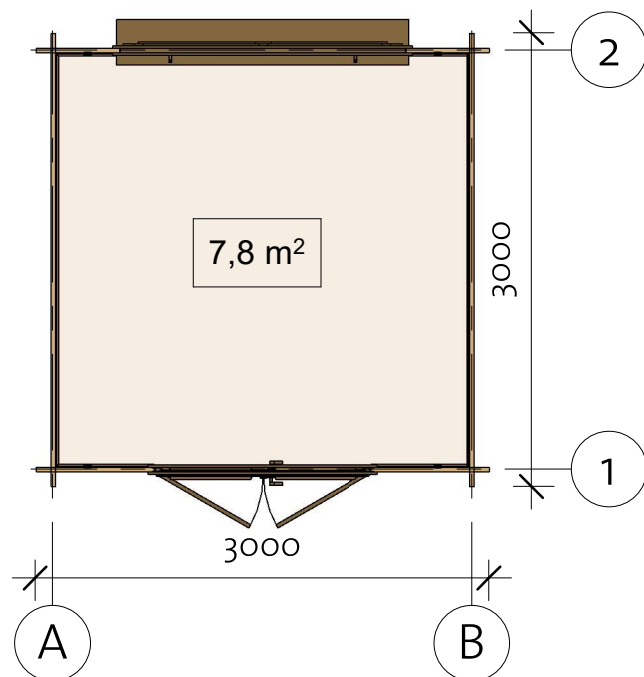


Frida 28 (280x280)

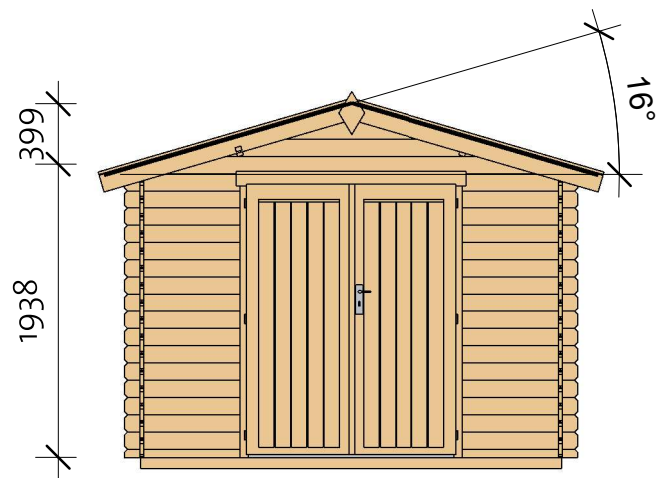

Frida 28 (280x280)

Foundation

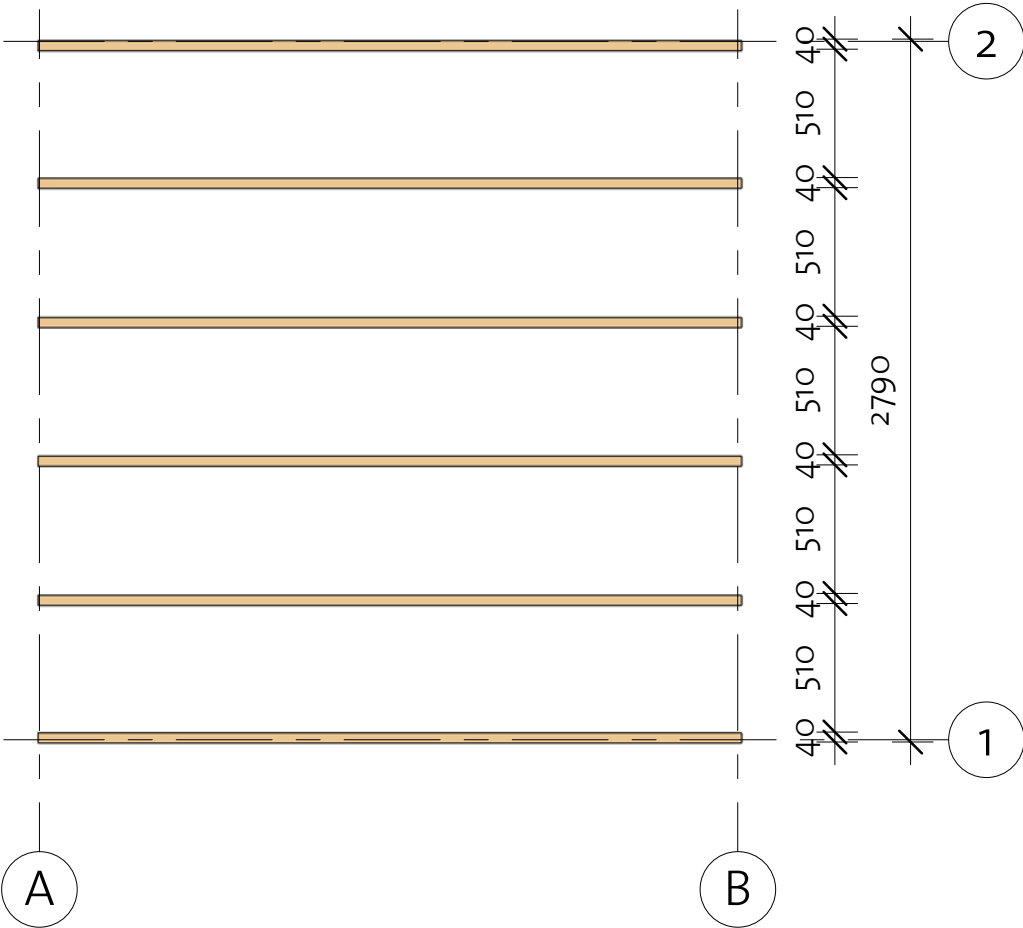


Impregnated foundation beams				
Mark	Type	Profile	Count	Length
IFB	IFB 40x70		6	2790

Frida 28 (280x280)


Floor Plan

I Baseboard

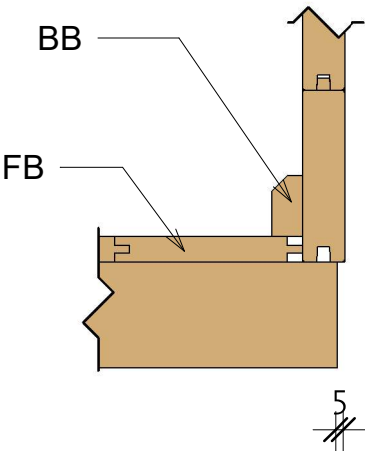


Floor Schedule				
Mark	Type	Profile	Count	Length
FB	FB 17x114		25	2740
BB	BB 20x40		4	2800

4000012_200402

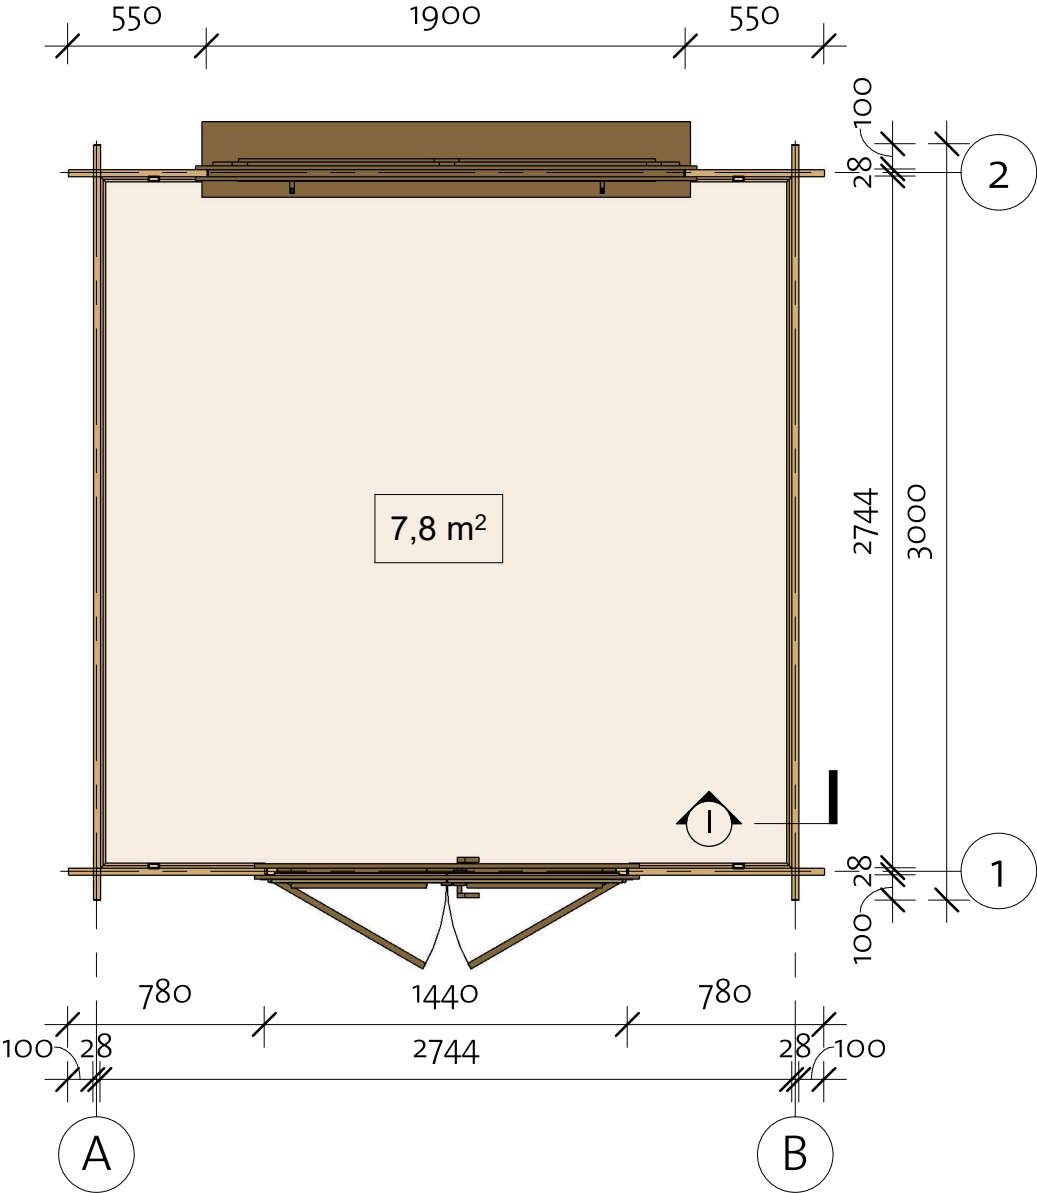


Wall 1

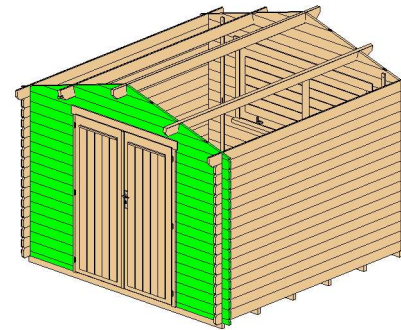

Wall 1			
Mark	Profile	Count	Cut Length

1BL 1	28x57	2	780
1LG 1	28x114	32	780
1LG 2*	28x114	1	787
1LG 3*	28x114	1	1498
1LG 4*	28x114	1	2353
1LG 5*	28x114	1	3000

*Gable-delivered premounted

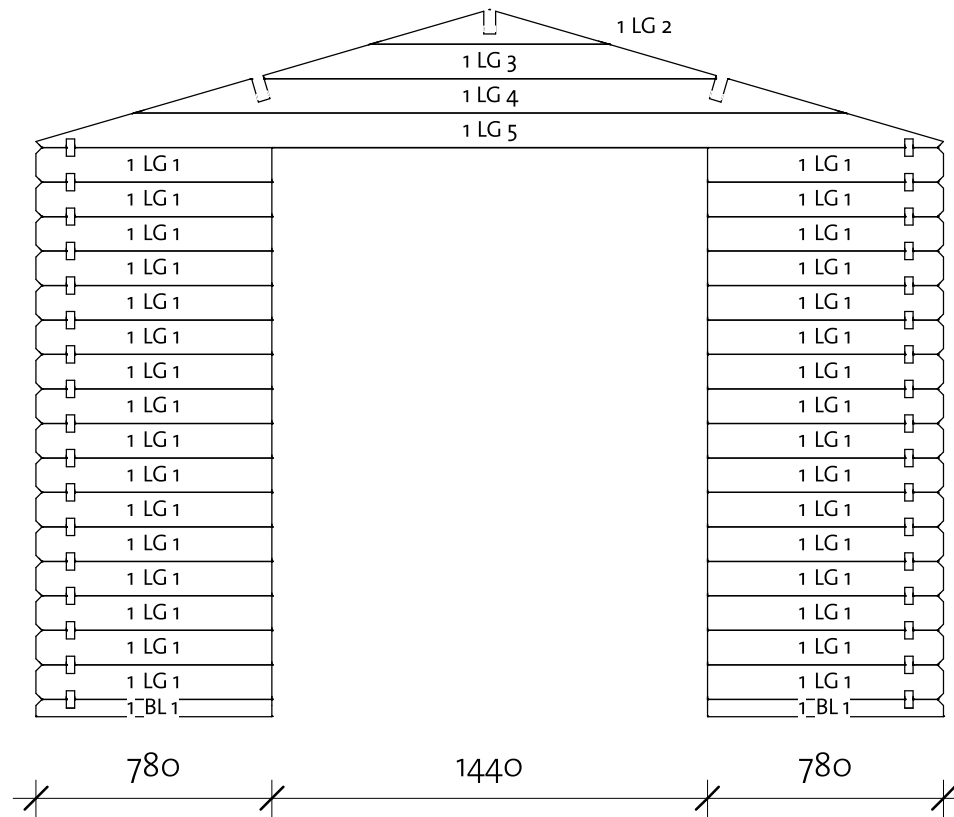



4000012_200402

Log Profile Wall 1	
Profile	Profile

28x57	
28x114	

Frida 28 (280x280)

Wall 2

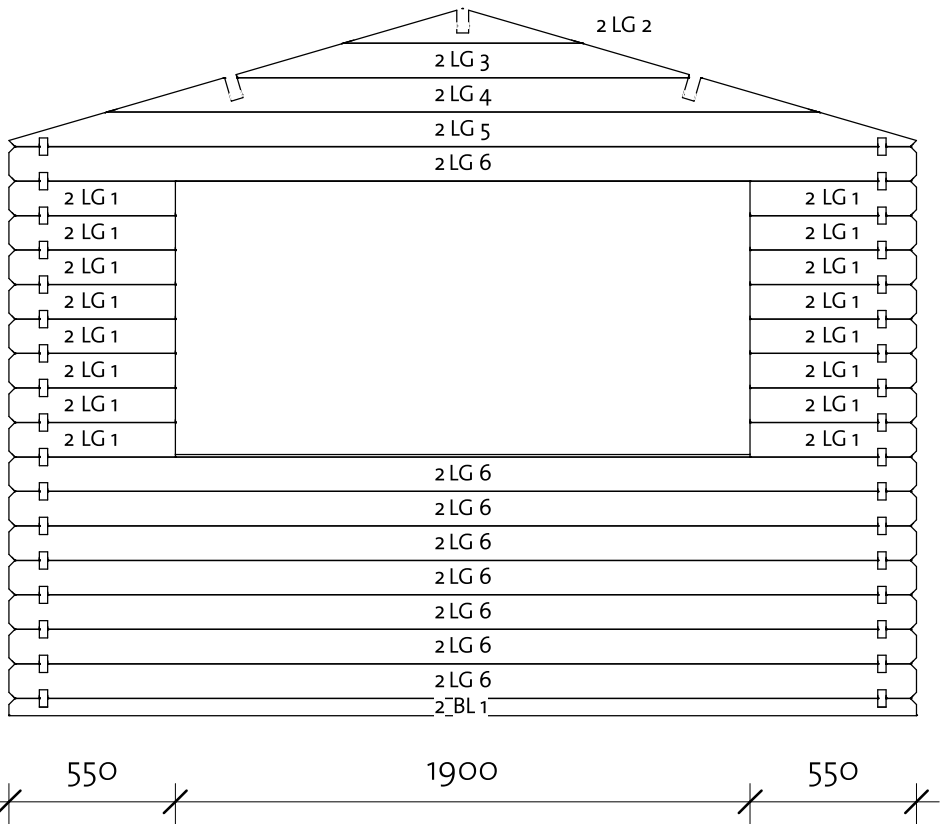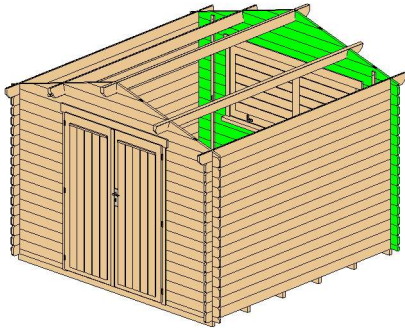

4000012_200402

Wall 2			
Mark	Profile	Count	Cut Length

2BL 1	28x57	1	3000
2LG 1	28x114	16	550
2LG 2*	28x114	1	787
2LG 3*	28x114	1	1498
2LG 4*	28x114	1	2353
2LG 5*	28x114	1	3000
2LG 6	28x114	8	3000


*Gable-delivered premounted

Log Profile Wall 2	
Profile	Profile

28x57	
28x114	


Frida 28 (280x280)

Wall A

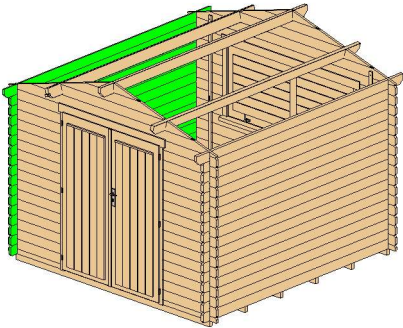

Wall A			
Mark	Profile	Count	Cut Length

ALG 1	28x114	16	3000
ATL 1	28x114	1	3200

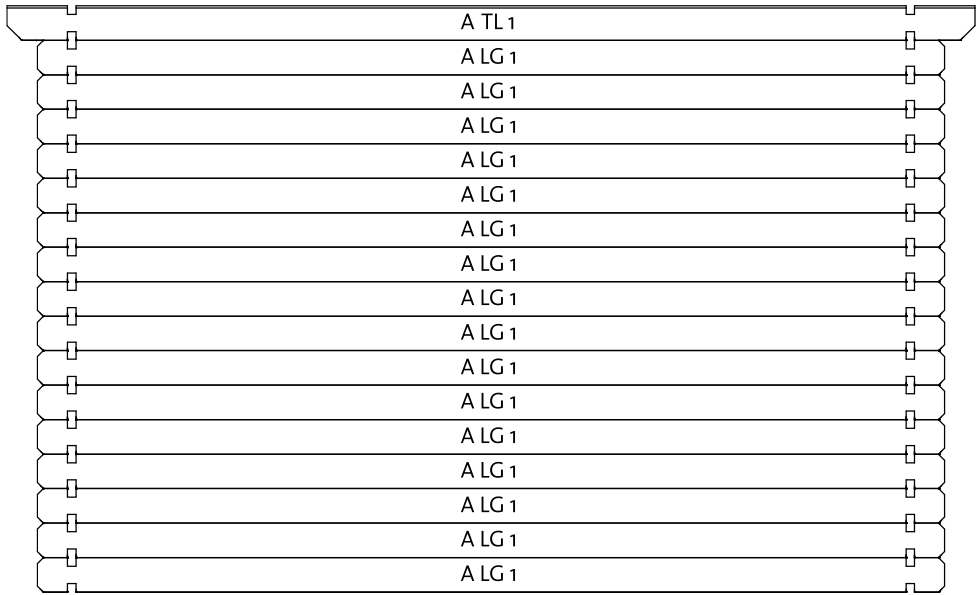


Log Profile Wall A	
Profile	Profile

28x114	
28x114	



Frida 28 (280x280)

Wall B

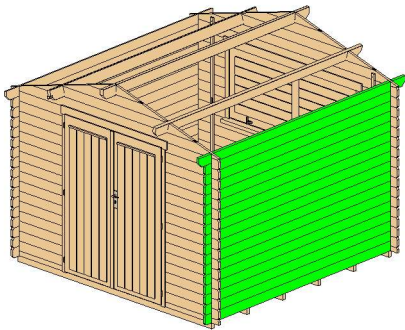

Wall B			
Mark	Profile	Count	Cut Length

BLG 1	28x114	16	3000
BTL 1	28x114	1	3200

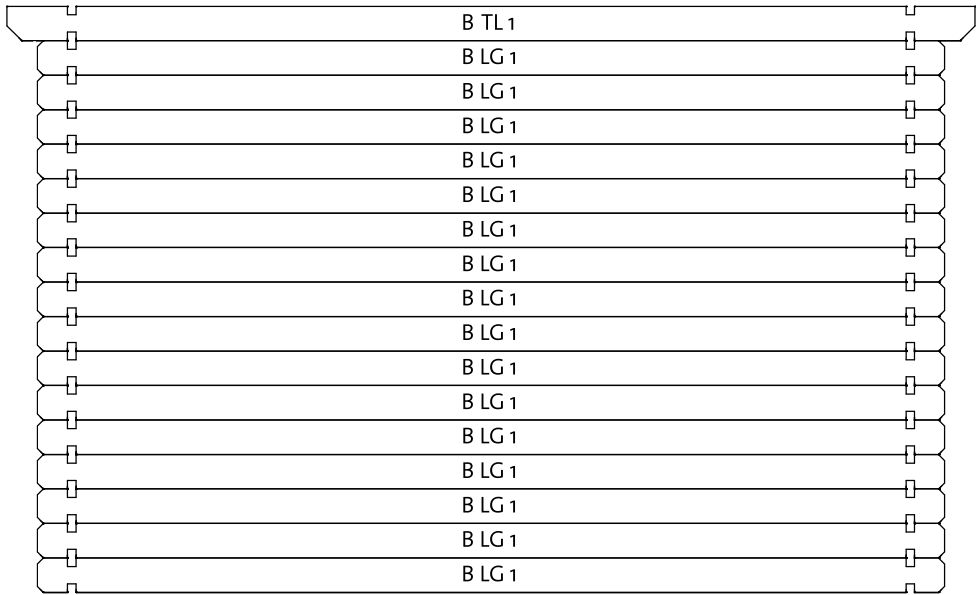


Log Profile Wall B	
Profile	Profile

28x114	
28x114	

Frida 28 (280x280)

Roof 1


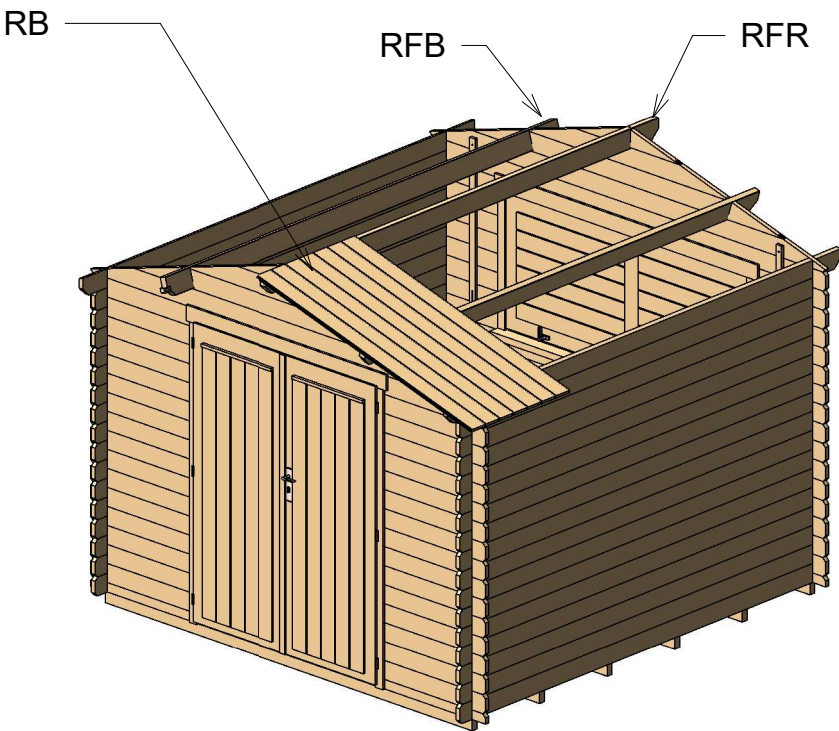


Roof				
Mark	Type	Profile	Count	Length



RFR	Ridge 40x120		1	3200
RFB	Beam 40x120		2	3200
RB	17x114		58	1697

Frida 28 (280x280)

Roof 2

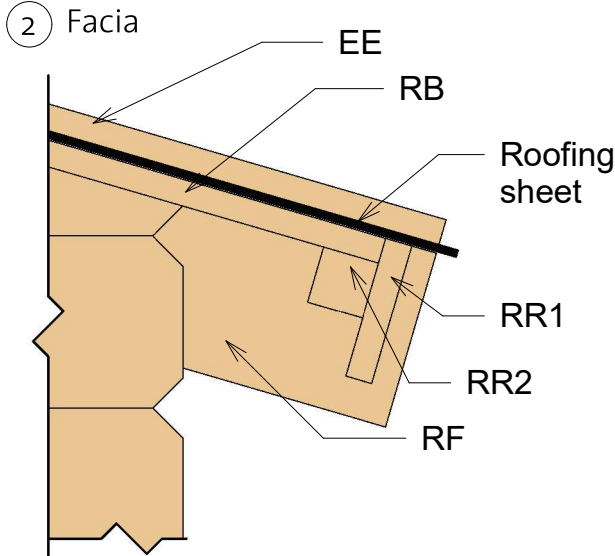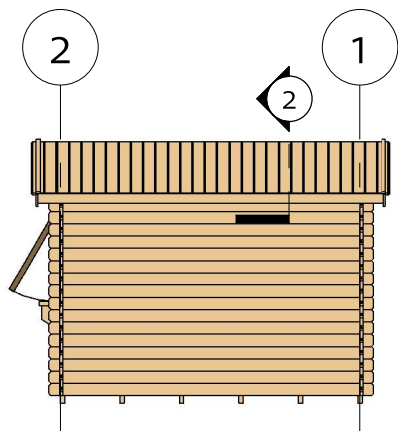


Fascia Schedule				
Mark	Type	Profile	Count	Length
EE	Eave Edging 18x40		4	1737
RF	Roof Fascia 18x120		4	1737
RR1	Roof reinforcement 18x95		2	3200
RR2	Roof reinforcement 38x38		2	3200

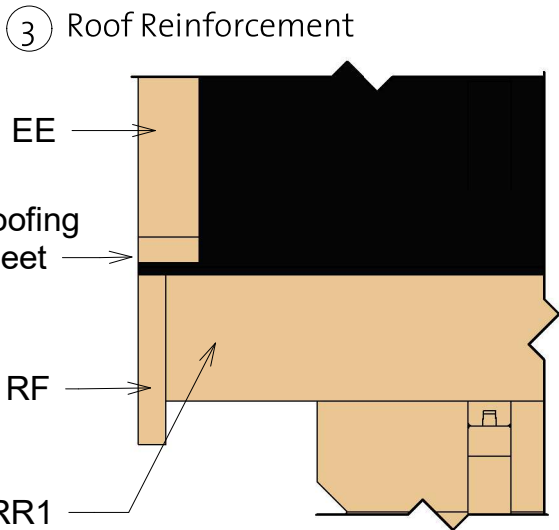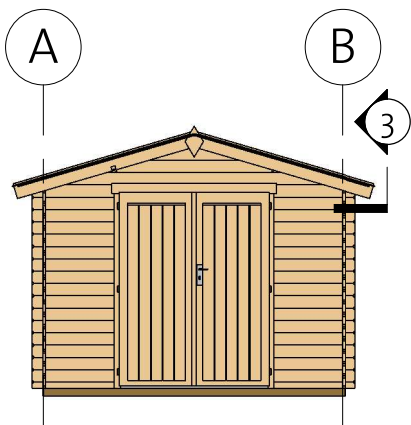

Frida 28 (280x280)

Extras

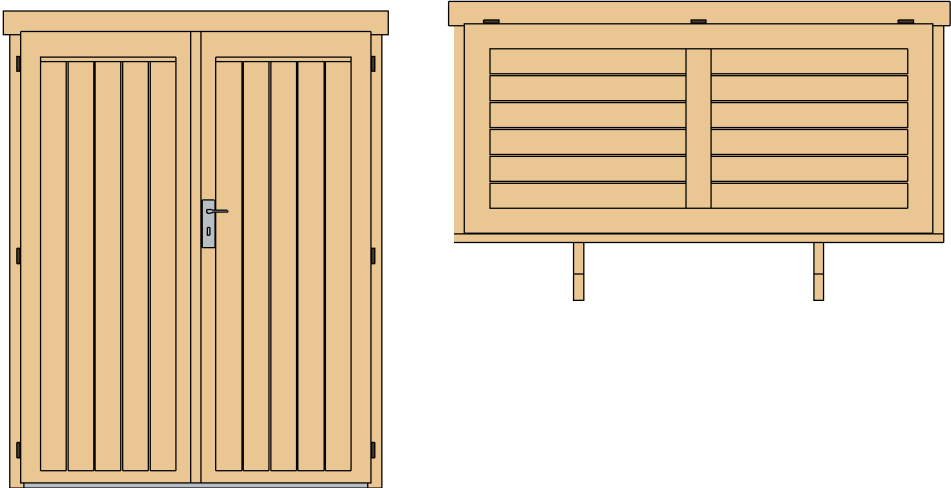

Schedule				
Model	Type	Width	Height	Count
BDD6R	Basic double door 6, wood right	1425	1835	1
KH1	Kiosk Hatch	1890	880	1

Fasteners & Extras		
Name	Type	Count

Hitblock	300-400 mm	
Bolts	M8 x 60	12
Screws	5,0 x 70	15
Nails	1,4x40	30
Screws	6,0 x 140	40
Screws	4,0 x 40	475

Type	Count	Lenght
Windboard 18x40	4	2200



Family	Count
Romb	2

Frida 28 (280x280)

List of all items 1

Impregnated foundation beams				
Mark	Type	Profile	Count	Length

IFB	IFB 40x70		6	2790
-----	-----------	---	---	------

Floor Schedule				
Mark	Type	Profile	Count	Length

FB	FB 17x114		25	2740
----	-----------	---	----	------

BB	BB 20x40		4	2800
----	----------	---	---	------

Roof				
Mark	Type	Profile	Count	Length

RFR	Ridge 40x120		1	3200
RFB	Beam 40x120		2	3200
RB	17x114		58	1697

Fascia Schedule				
Mark	Type	Profile	Count	Length

EE	Eave Edging 18x40		4	1737
RF	Roof Fascia 18x120		4	1737
RR1	Roof reinforcement 18x95		2	3200
RR2	Roof reinforcement 38x38		2	3200

Frida 28 (280x280)

List of all items 2

Wall 1			
Mark	Profile	Count	Cut Length

1BL 1	28x57	2	780
1LG 1	28x114	32	780
1LG 2*	28x114	1	787
1LG 3*	28x114	1	1498
1LG 4*	28x114	1	2353
1LG 5*	28x114	1	3000

Wall 2			
Mark	Profile	Count	Cut Length

2BL 1	28x57	1	3000
2LG 1	28x114	16	550
2LG 2*	28x114	1	787
2LG 3*	28x114	1	1498
2LG 4*	28x114	1	2353
2LG 5*	28x114	1	3000
2LG 6	28x114	8	3000

*Gable-delivered premounted

Wall A			
Mark	Profile	Count	Cut Length

ALG 1	28x114	16	3000
ATL 1	28x114	1	3200

Wall B			
Mark	Profile	Count	Cut Length

BLG 1	28x114	16	3000
BTL 1	28x114	1	3200

Log Profiles	
Profile	Profile

28x57	
28x114	
28x114	