

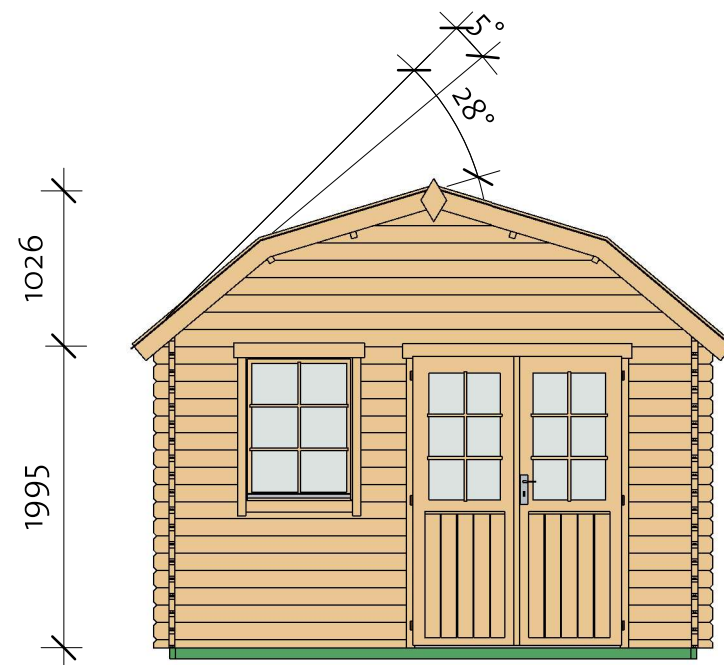


Gnesta 40 (350x425)

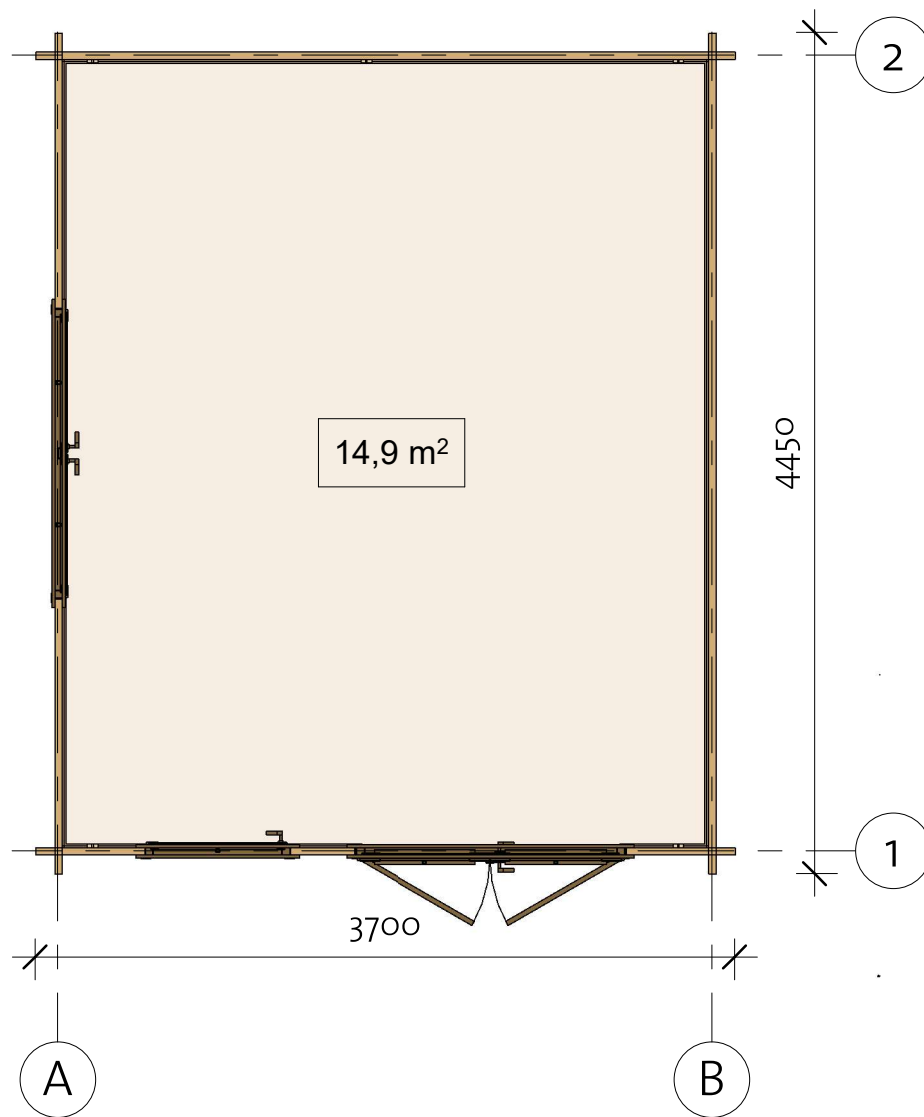

Gnesta 40 (350x425)

Foundation

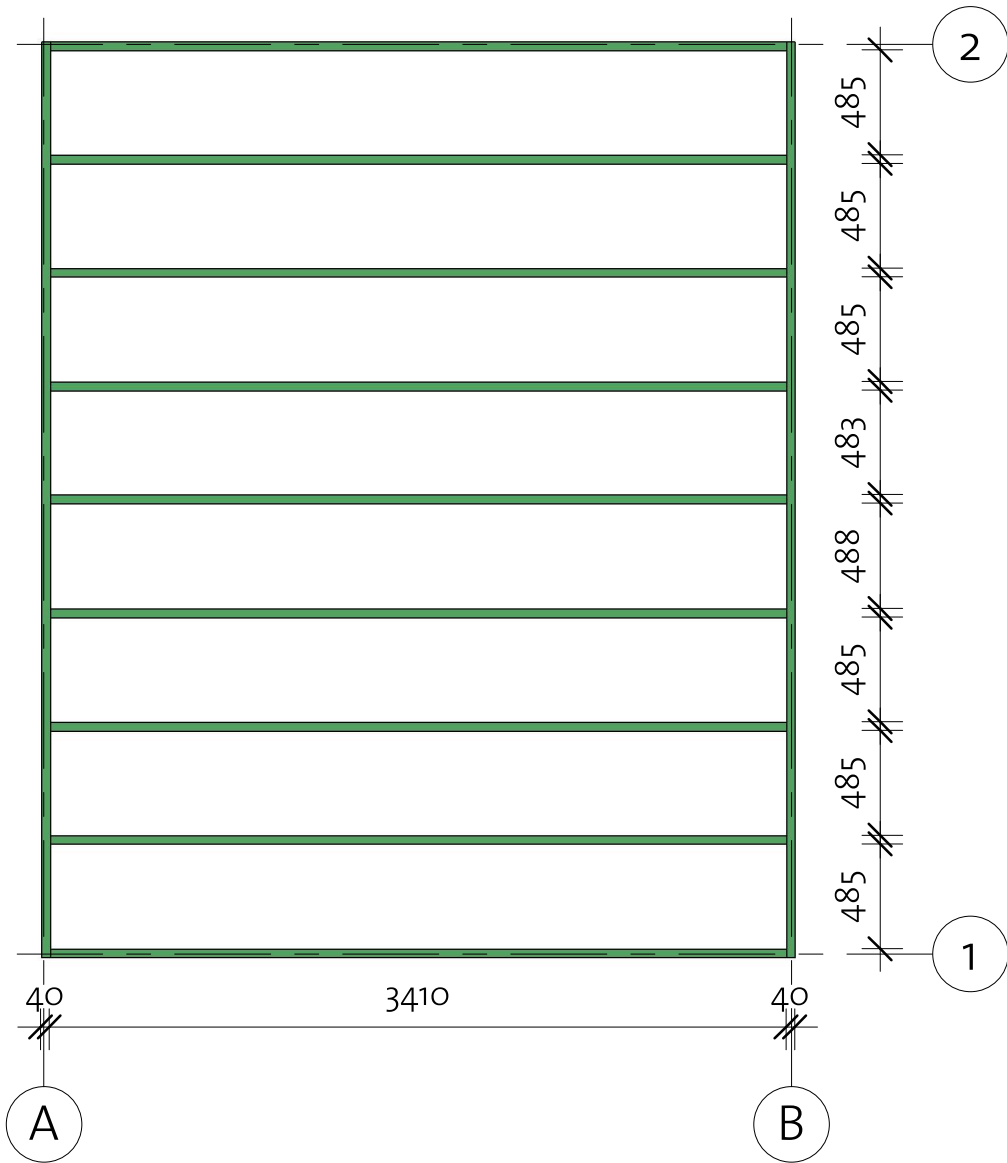


Impregnated foundation beams				
Mark	Type	Profile	Count	Length

IFB1	IFB 40x70		2	4240
IFB2	IFB 40x70		9	3410

Gnesta 40 (350x425)

Floor Plan


① Baseboard

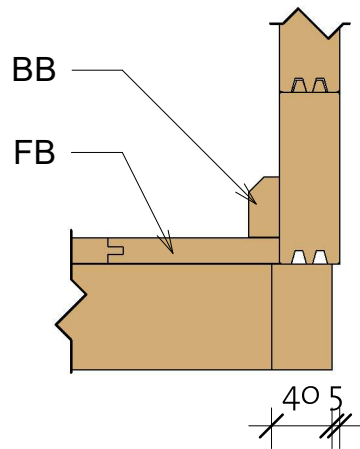

Floor Schedule


Mark	Type	Profile	Count	Length
FB	FB 17x114		31	4166
BB1	BB 20x40		2	4250
BB2	BB 20x40		2	3500

4200011_200206

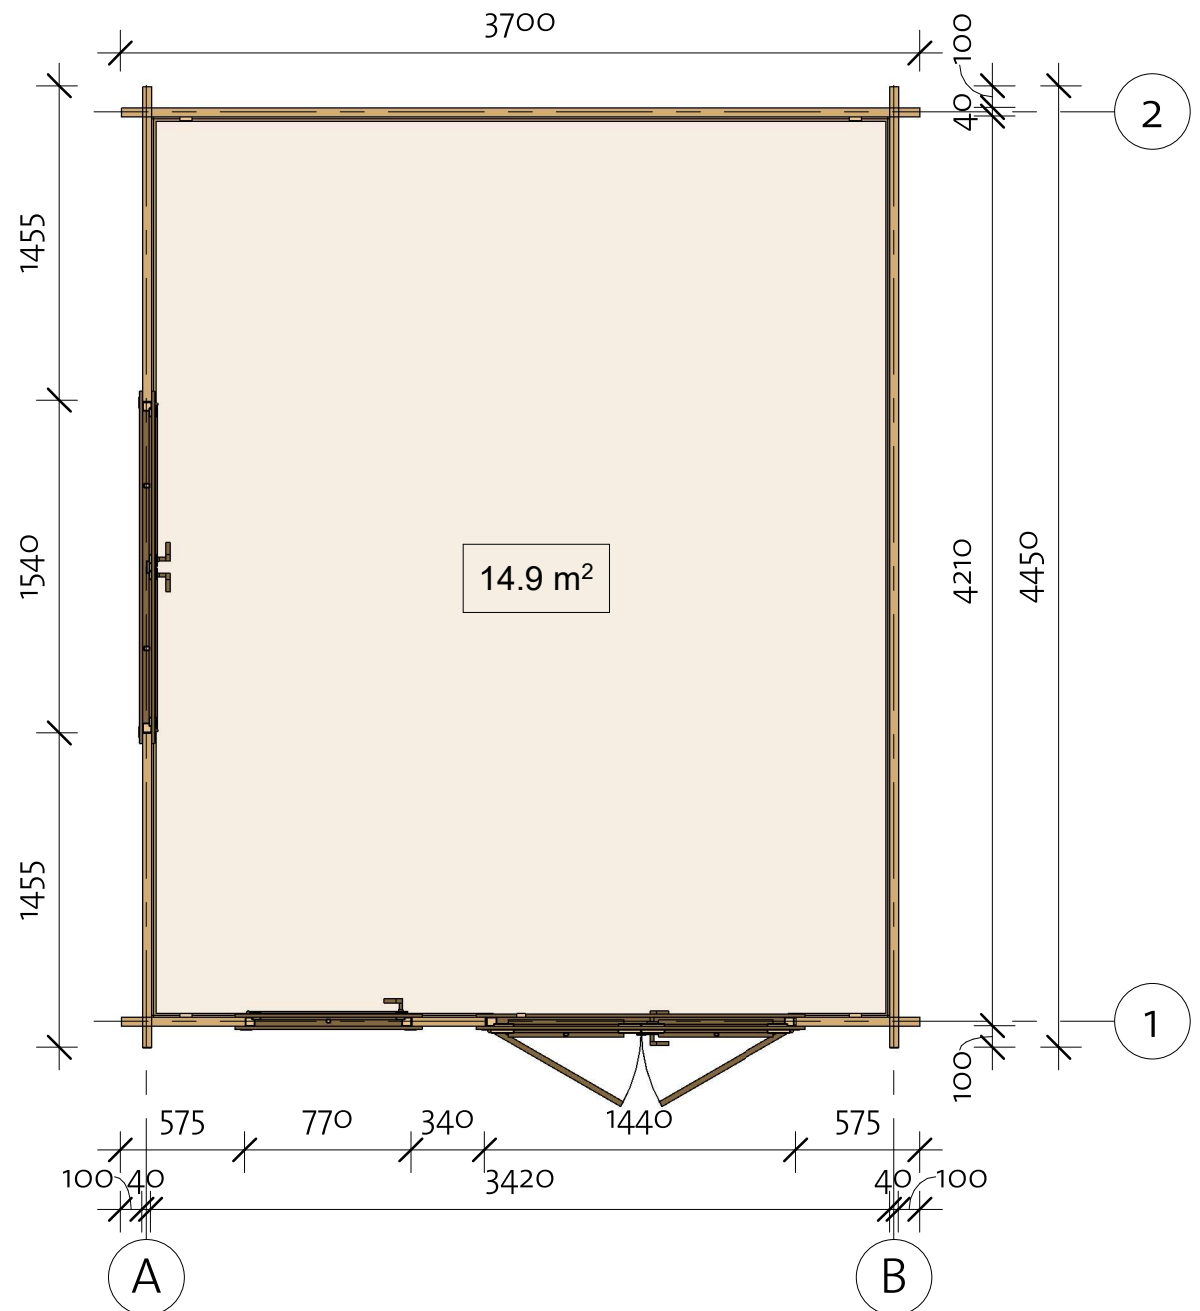


Gnesta 40 (350x425)

Wall 1

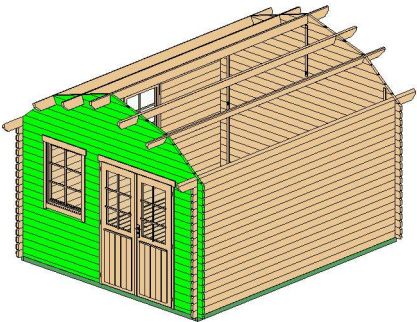

*Gable 1 - delivered premounted
**Gable 2 - delivered premounted

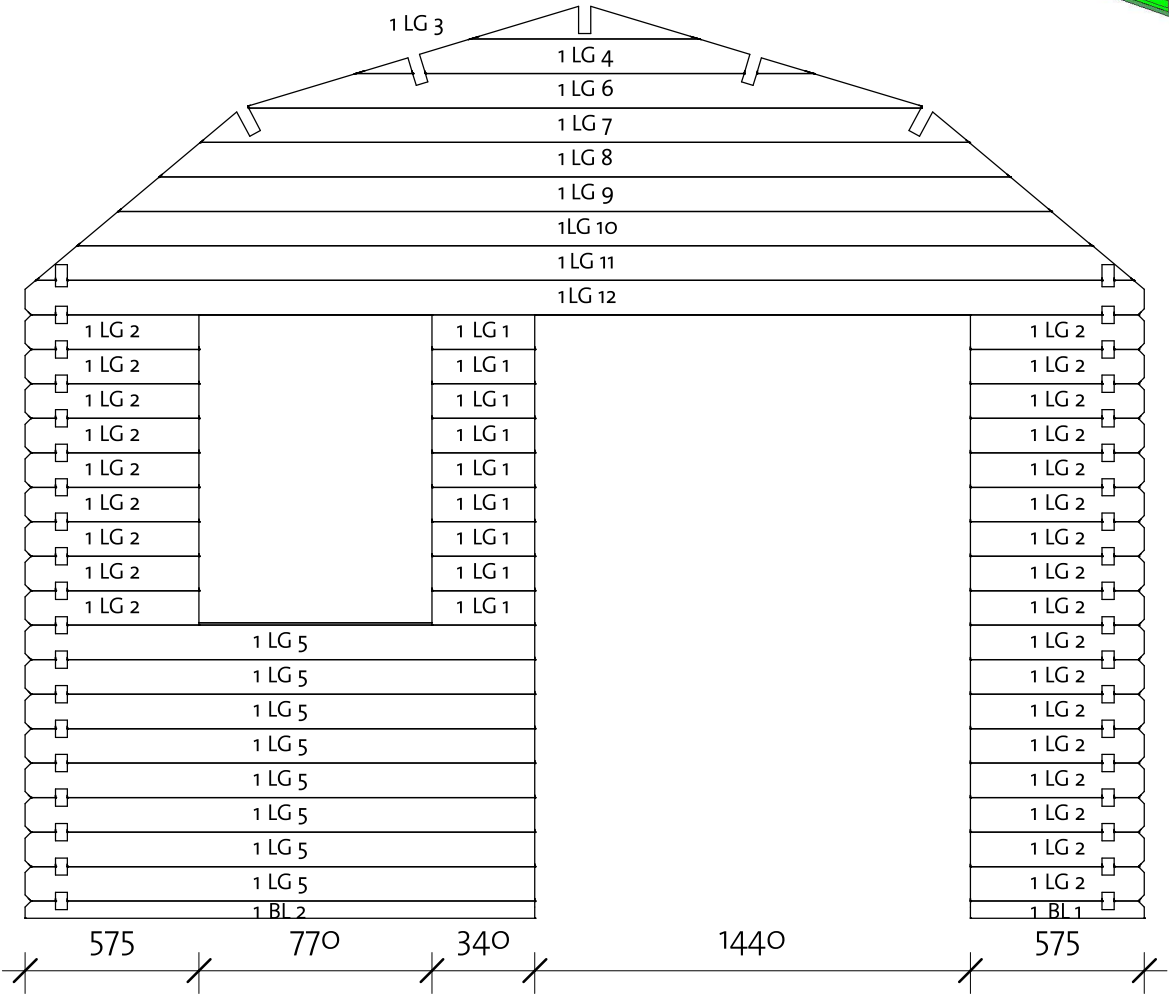

Wall 1			
Mark	Profile	Count	Cut Length


1BL 1	40X57	1	575
1BL 2	40X57	1	1685
1LG 1	40X114	9	340
1LG 2	40X114	26	575
1LG 3 *	40X114	1	757
1LG 4 *	40X114	1	1513
1LG 5	40X114	8	1685
1LG 6 *	40X114	1	2230
1LG 7 *	40X114	1	2541
1LG 8 **	40X114	1	2813
1LG 9 **	40X114	1	3085
1LG 10 **	40X114	1	3357
1LG 11 **	40X114	1	3629
1LG 12 **	40X114	1	3700

Log Profile Wall 1	
Profile	Profile

40X57	
40X114	

Gnesta 40 (350x425)

Wall 2

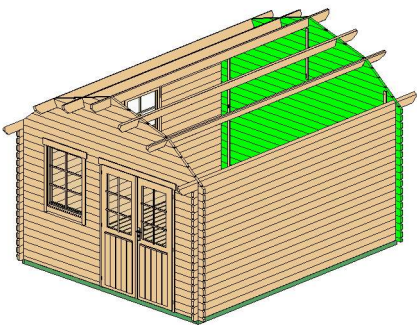

Wall 2			
Mark	Profile	Count	Cut Length


2BL 1	40x57	1	3700
2LG 1 *	40x114	1	757
2LG 2 *	40x114	1	1513
2LG 3 *	40x114	1	2230
2LG 4 *	40x114	1	2541
2LG 5 **	40x114	1	2813
2LG 6 **	40x114	1	3085
2LG 7 **	40x114	1	3357
2LG 8 **	40x114	1	3629
2LG 9	40x114	17	3700
2LG 10 *	40x114	1	3700

*Gable 1 - delivered premounted

**Gable 2 - delivered premounted

Log Profile Wall 2	
Profile	Profile


40x57	
40x114	

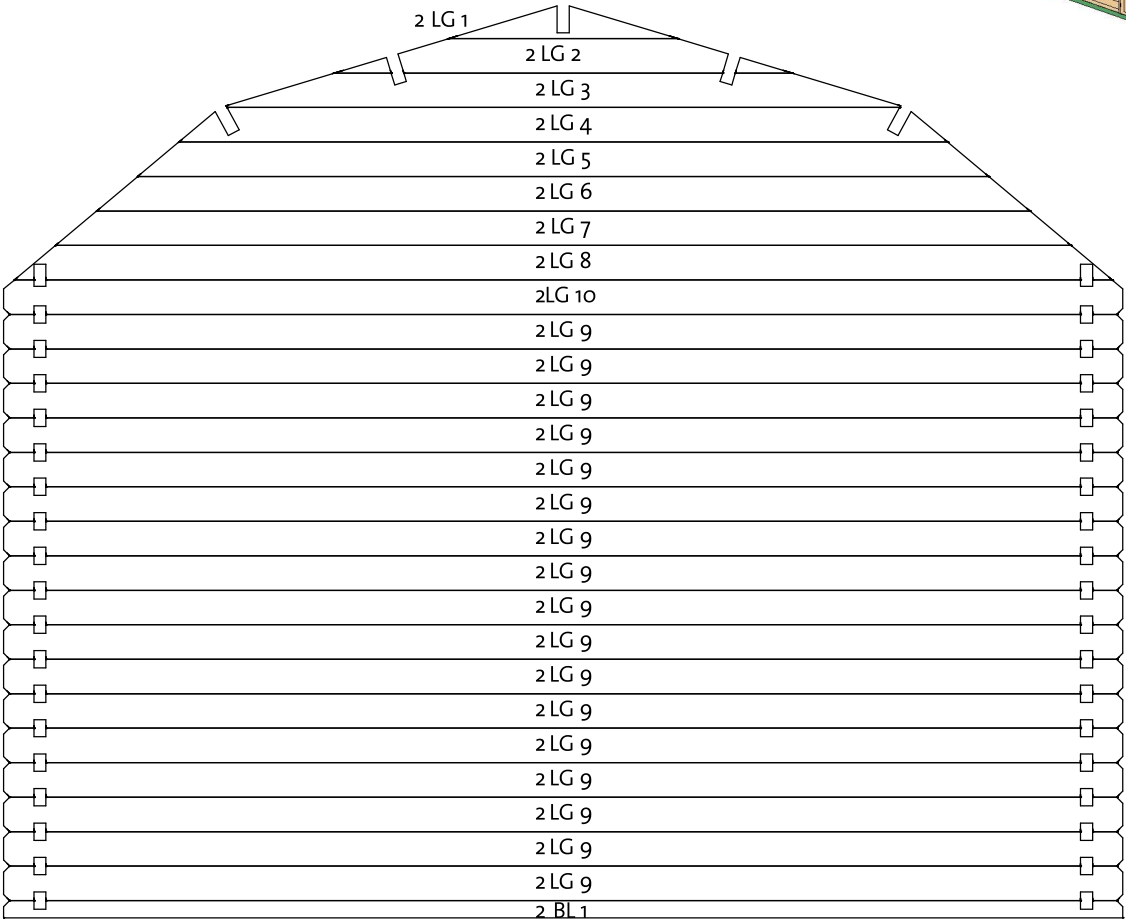

3700


Gnesta 40 (350x425)

Wall A

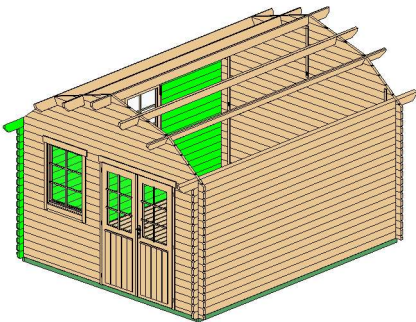

Wall A			
Mark	Profile	Count	Cut Length

ALG 1	40x114	18	1455
ALG 2	40x114	9	4450
ATL 1	40x145	1	5050

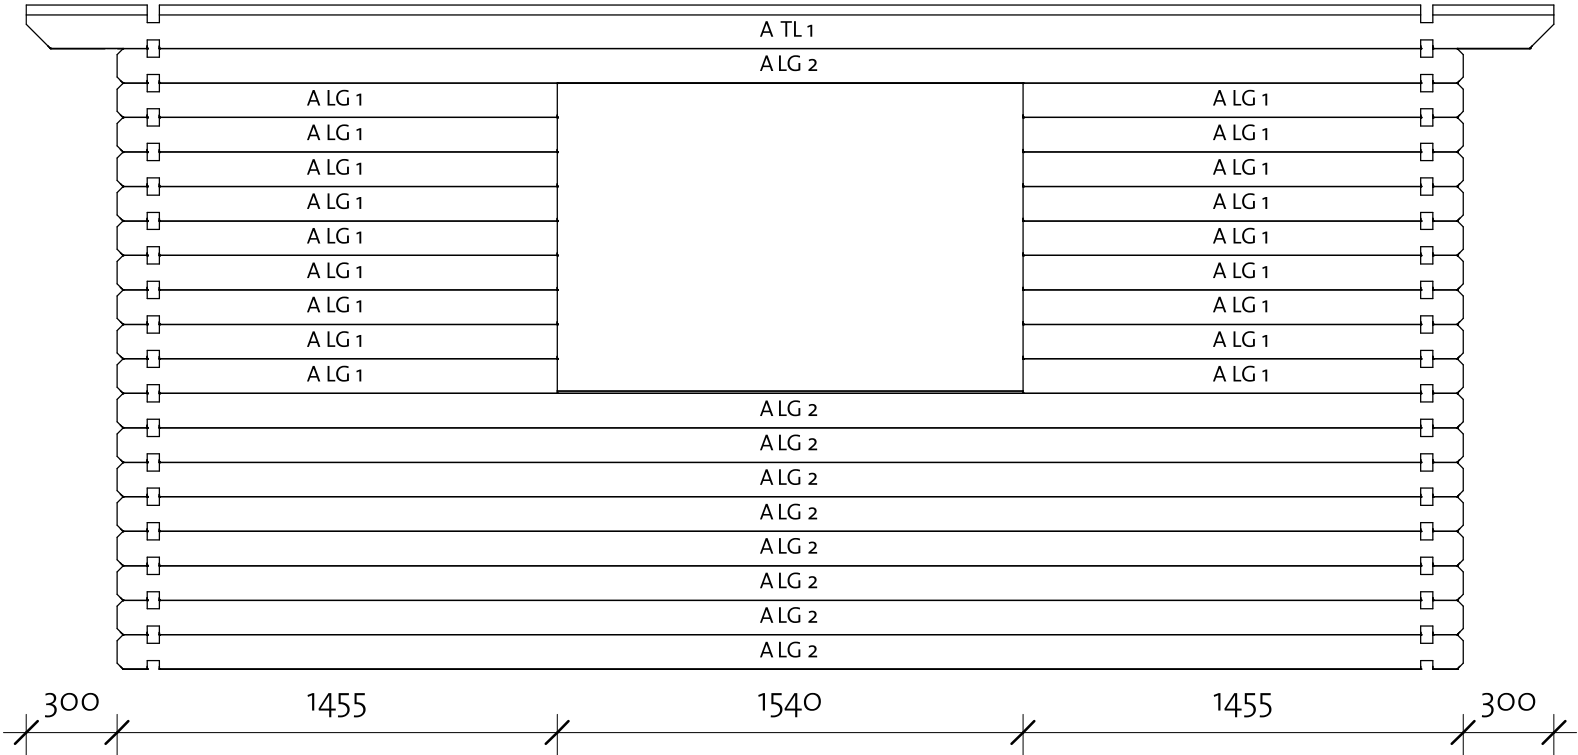


Log Profile Wall A	
Profile	Profile

40x114	
40x145	


Gnesta 40 (350x425)

Wall B

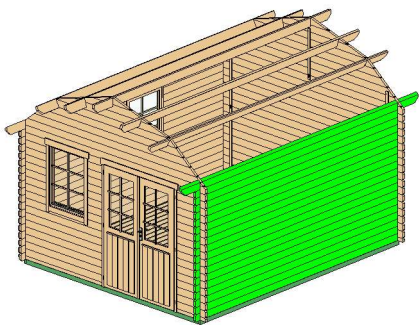


Wall B			
Mark	Profile	Count	Cut Length

BLG 1	40x114	18	4450
BTL 1	40x145	1	5050

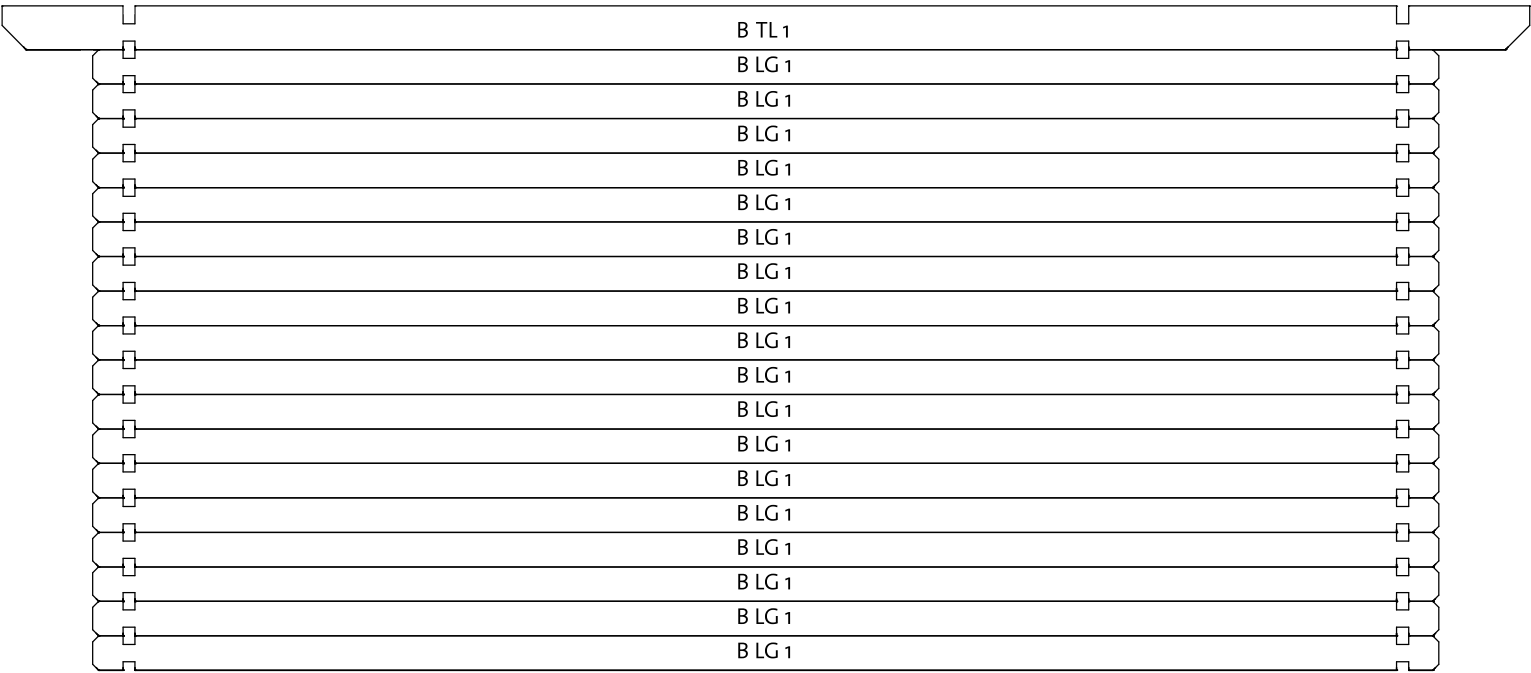


Log Profile Wall B	
Profile	Profile

40x114	
40x145	



Gnesta 40 (350x425)


Roof 1

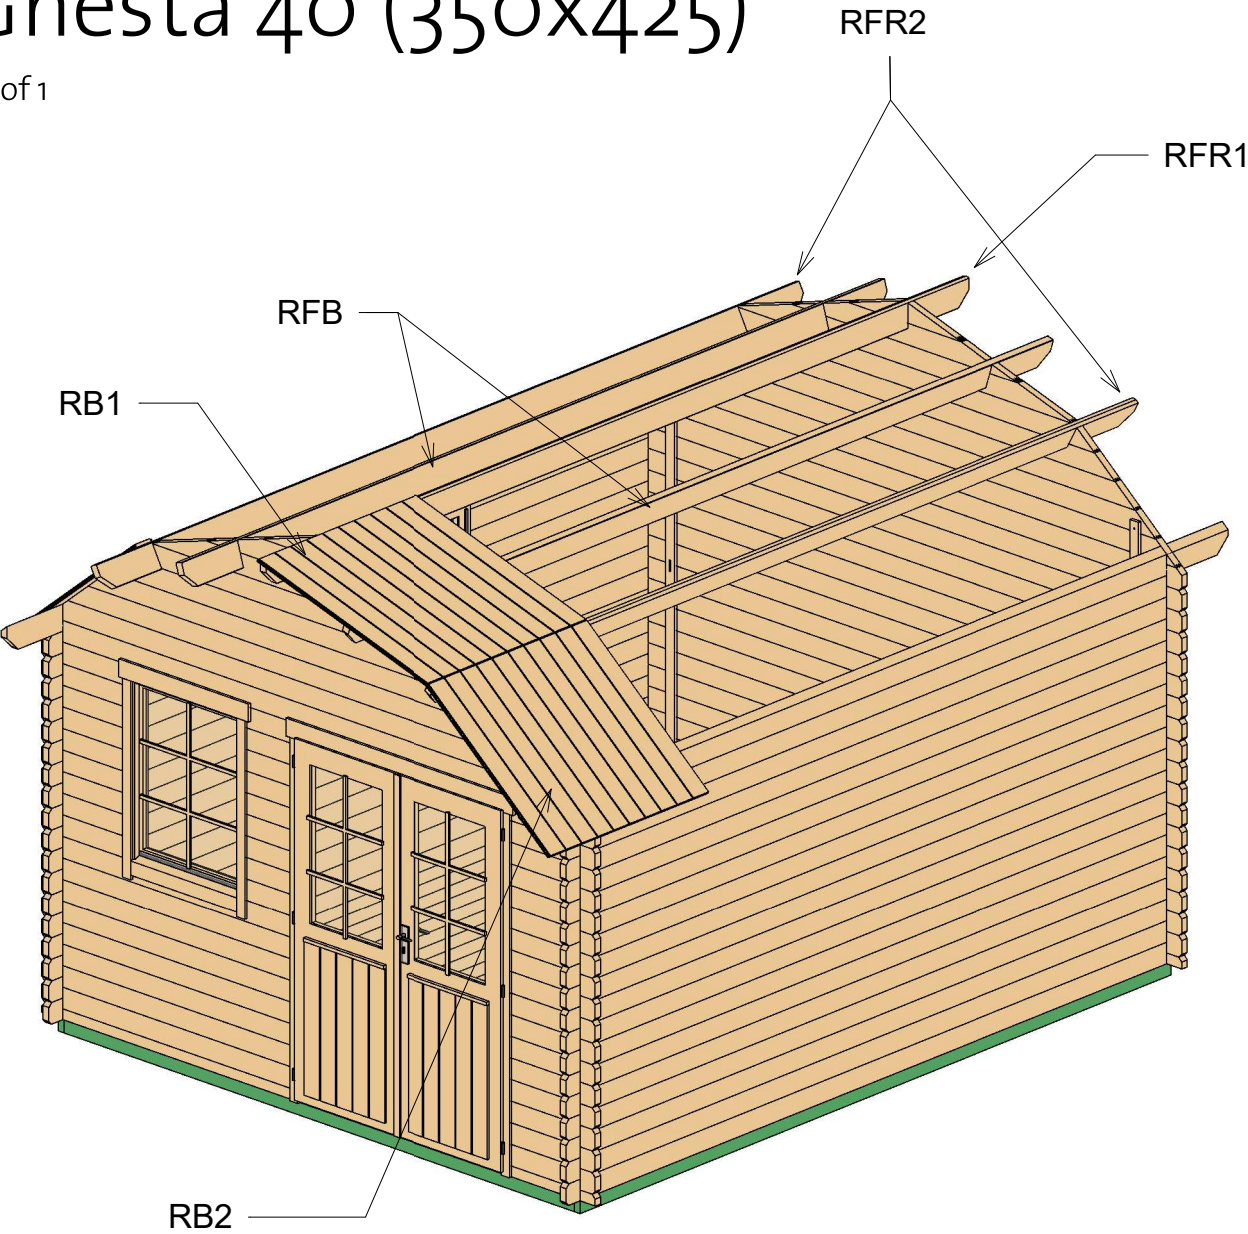


Roof				
Mark	Type	Profile	Count	Length
RFR1	Ridge 40x143		1	5050
RFR2	Ridge 40x143		2	5050
RFB	Beam 40x143		2	5050
RB1	17x114		92	1185
RB2	17x114		92	1060

Gnesta 40 (350x425)


Roof 2

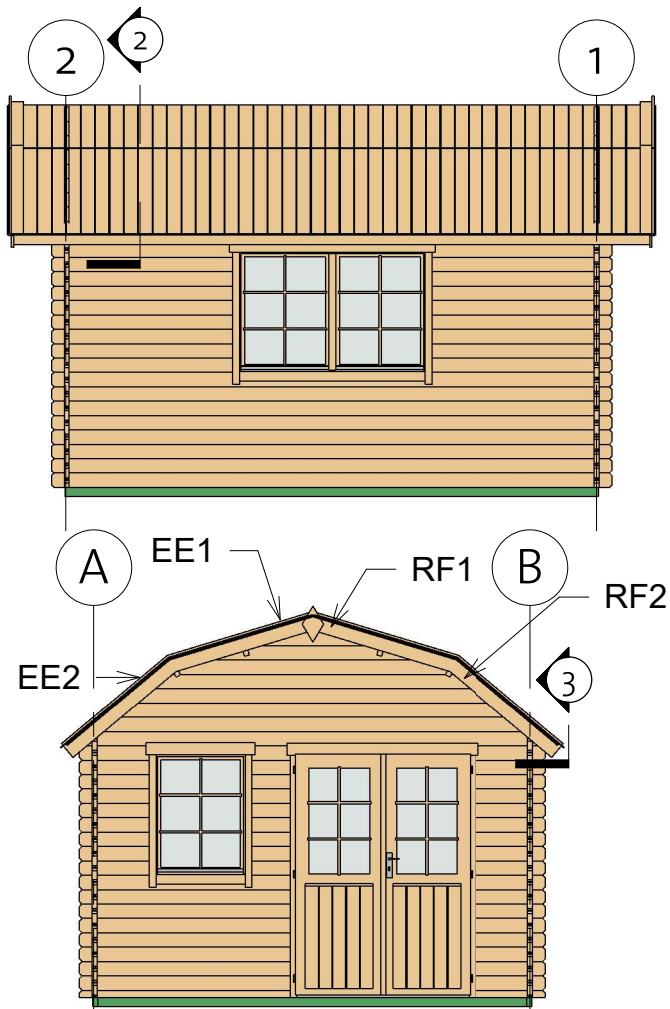

② Facia

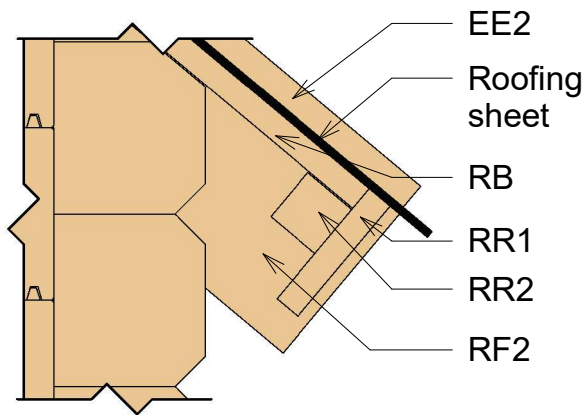

③ Roof Reinforcement

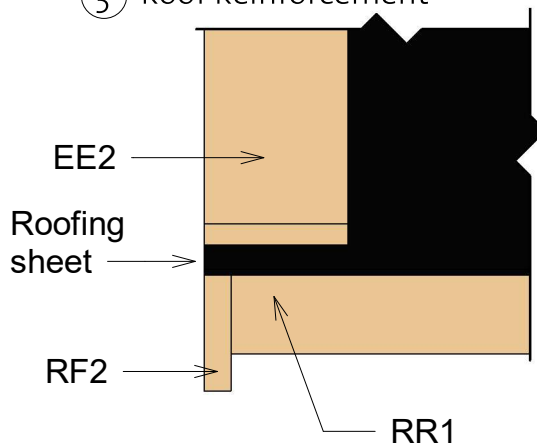


Fascia Schedule

Mark	Type	Profile	Count	Length
EE1	Eave Edging 18x95		4	1197
EE2	Eave Edging 18x95		4	1090
RF1	Roof Fascia 18x120		4	1194
RF2	Roof Fascia 18x120		4	1090
RR1	Roof reinforcement 18x95		2	5050
RR2	Roof reinforcement 38x38		2	5050

Gnesta 40 (350x425)

List of all items 1


	RFB	Beam 40x143			2	5050
	RFR1	Ridge 40x143			1	5050
	RFR2	Ridge 40x143			2	5050
A	TL 1	Log 40x145			1	5050
B	TL 1	Log 40x145			1	5050
B	LG 1	Log 40x114			18	4450
A	LG 2	Log 40x114			9	4450
	IFB1	IFB 40x70			2	4240
	FB	FB 17x114			31	4166
2	BL 1	Log 40x57			1	3700
2	LG 9	Log 40x114			17	3700
	IFB2	IFB 40x70			9	3410
1	BL 2	Log 40x57			1	1685
1	LG 5	Log 40x114			8	1685
A	LG 1				18	1455
	RB1	17x114			92	1185
	RB2	17x114			92	1060
1	BL 1	Log 40x57			1	575
1	LG 2				26	575
1	LG 1	Log 40x114			9	340

Gnesta 40 (350x425)


List of all items 2

RR1	Roof reinforcement 18x95		2	5050
RR2	Roof reinforcement 38x38		2	5050
EE1	Eave Edging 18x95		4	1197
RF1	Roof Fascia 18x120		4	1194
EE2	Eave Edging 18x95		4	1090
RF2	Roof Fascia 18x120		4	1090

① Gable 1a




③ Gable 2a



② Gable 1b



④ Gable 2b



BB1	BB 20x40			2	4250
BB2	BB 20x40			2	3500




Windboard 18x40		5	2200
-----------------	---	---	------

Romb	2
------	---



Hitblock	300-400 mm		
Screws	5,0 x 70		15
Bolts	M8 x 70		16
Nails	1,4 x 40		30
Screws	6,0 x 140		70
Screws	4,0 x 40		970

CDD1R	Classic double door 1 right	1425	1955	1
DCB6	Door crossbar 6	--	--	2
CDW1	Classic double window 1	1530	990	1
CW1R	Classic window 1 right	765	990	1
WCB6	Window crossbar 6	--	--	3



4200011_200206