



Kitchener 3 40 (575x760)

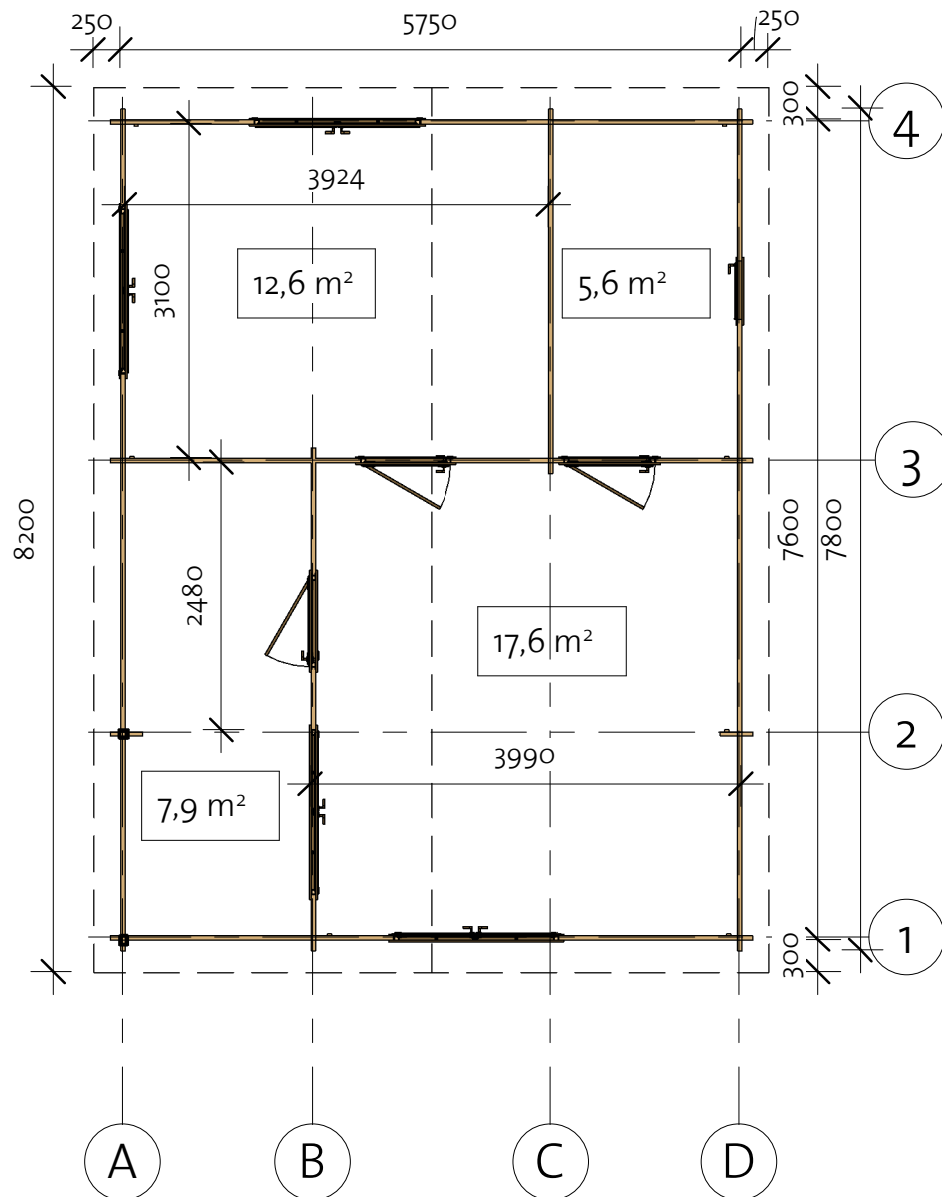


92402292_240701

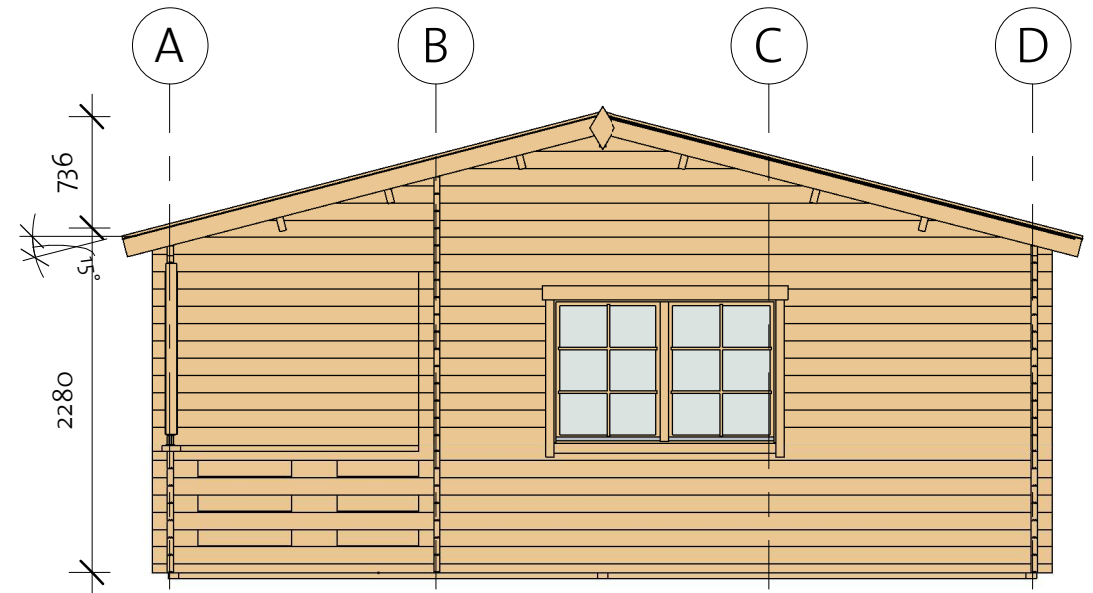

 **VIKTRÄ**

Foundation



IFB1	IFB 70x40		32	2765
IFB2	IFB 70x40		3	4435
IFB3	IFB 70x40		3	3155
IFB4	IFB 70x40		2	476

Kitchener 3 40 (575x760)

Floor Plan



Floor Schedule

Mark	Type	Profile	Count	Length
------	------	---------	-------	--------

FB1	FB 17x114		35	4374
FB2	FB 17x114		50	3094
TB	TB 28x120		14	4375


BB 1	BB 18x40		5	3200
BB 2	BB 18x40		5	4400

① Baseboard

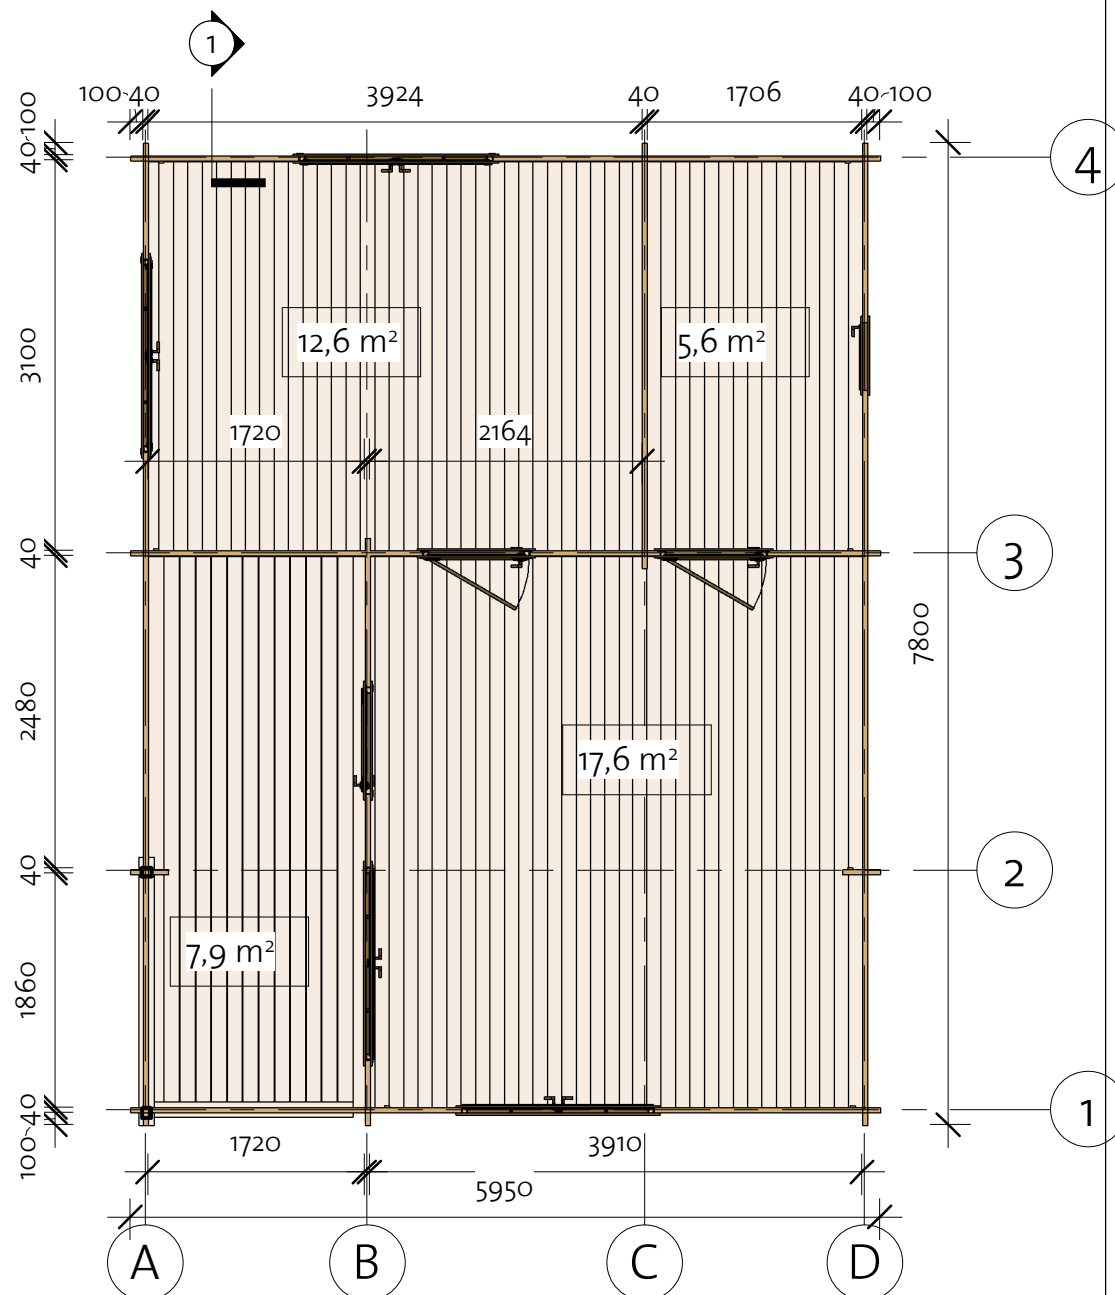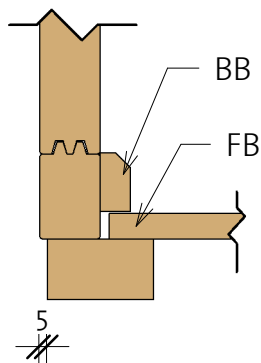

Kitchener 3 40 (575x760)


Wall 1

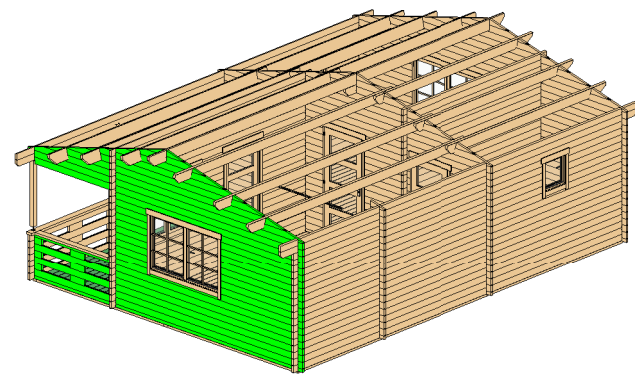

Log Profile Wall 1		Log Profile Wall 1	
Profile	Profile	Profile	Profile
40x57		40x114	

Wall 1			
Mark	Profile	Count	Cut Length


1BL-1	40x57	1	5950
1LG-1 *	40x114	1	837
1LG-2 *	40x114	1	1716
1LG-3 *	40x114	1	2594
1LG-4 *	40x114	1	3473
1LG-5 *	40x114	1	4277
1LG-6 *	40x114	1	5231
1LG-7 *	40x114	1	5950
1LG-8	40x114	4	5950
1LG-9	40x114	1	5950
1LG-10	40x114	4	4190
1LG-11	40x114	9	860
1LG-12	40x114	9	1790
1LG-13	40x114	1	5950
1LG-14	40x114	3	300
1LG-15	40x114	3	300

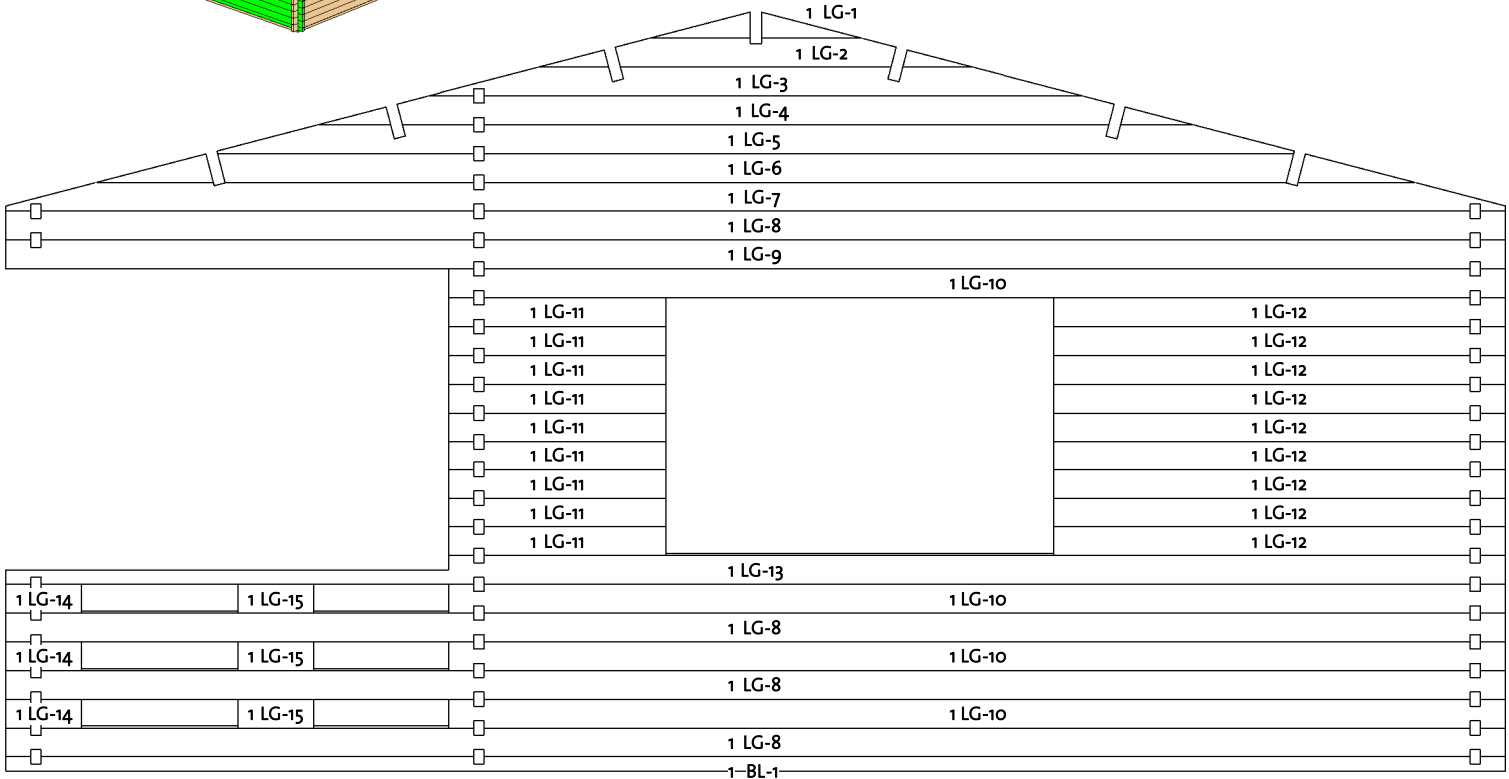

* Gable - delivered premounted

Kitchener 3 40 (575x760)

Wall 2

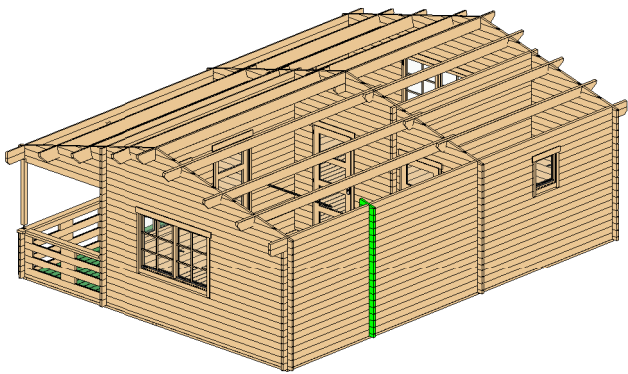


Wall 2			
Mark	Profile	Count	Cut Length

2BL-1	40x57	2	300
2LG-1	40x57	1	300
2LG-2	40x114	25	300
2LG-3	40x114	1	300

	2 LG-1
	2 LG-2
	2 LG-2
	2 LG-2
	2 LG-2
	2 LG-2
	2 LG-2
	2 LG-2
	2 LG-2
	2 BL-1



2 LG-3	
2 LG-2	
2 LG-2	
2 LG-2	
2 LG-2	
2 LG-2	
2 LG-2	
2 LG-2	
2 LG-2	
2 LG-2	
2 LG-2	
2 LG-2	
2 LG-2	
2 LG-2	
2 LG-2	
2 LG-2	
2 LG-2	
2 LG-2	
2 LG-2	

Log Profile Wall 2	
Profile	Profile

40x57	
40x57	

Kitchener 3 40 (575x760)

Wall 3

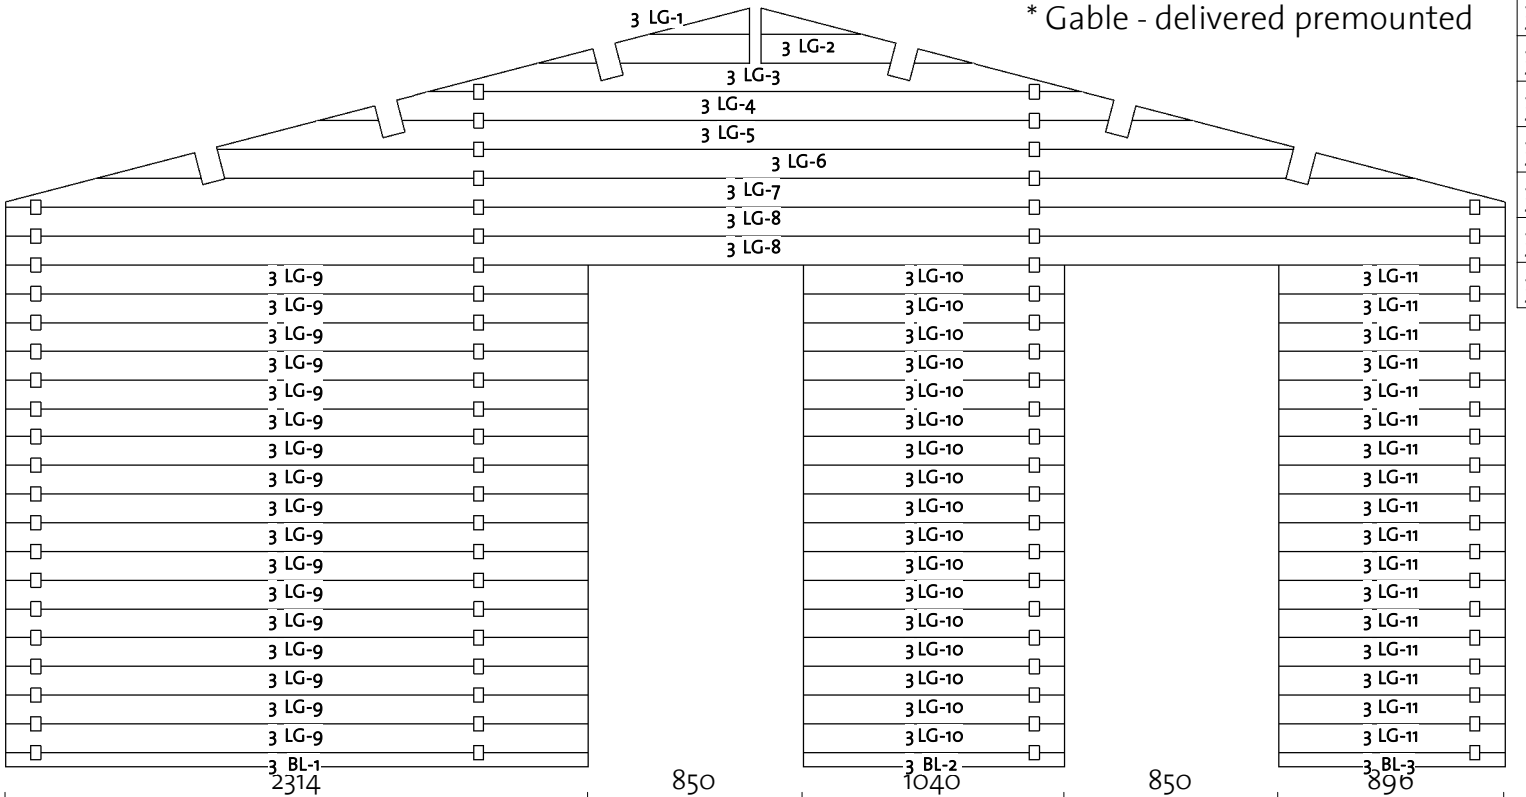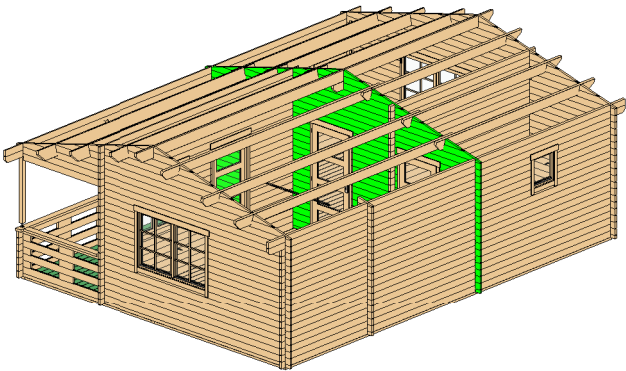

Wall 3			
Mark	Profile	Count	Cut Length



3BL-1	40X57	1	2314
3BL-2	40X57	1	1040
3BL-3	40X57	1	896
3LG-1 *	40X114	1	837
3LG-2 *	40X114	1	1716
3LG-3 *	40X114	1	2594
3LG-4 *	40X114	1	3473
3LG-5 *	40X114	1	4277
3LG-6 *	40X114	1	5231
3LG-7 *	40X114	1	5950
3LG-8	40X114	2	5950
3LG-9	40X114	17	2314
3LG-10	40X114	17	1040
3LG-11	40X114	17	896

Log Profile Wall 3	
Profile	Profile

40X57	
40X57	

Kitchener 3 40 (575x760)

Wall 4

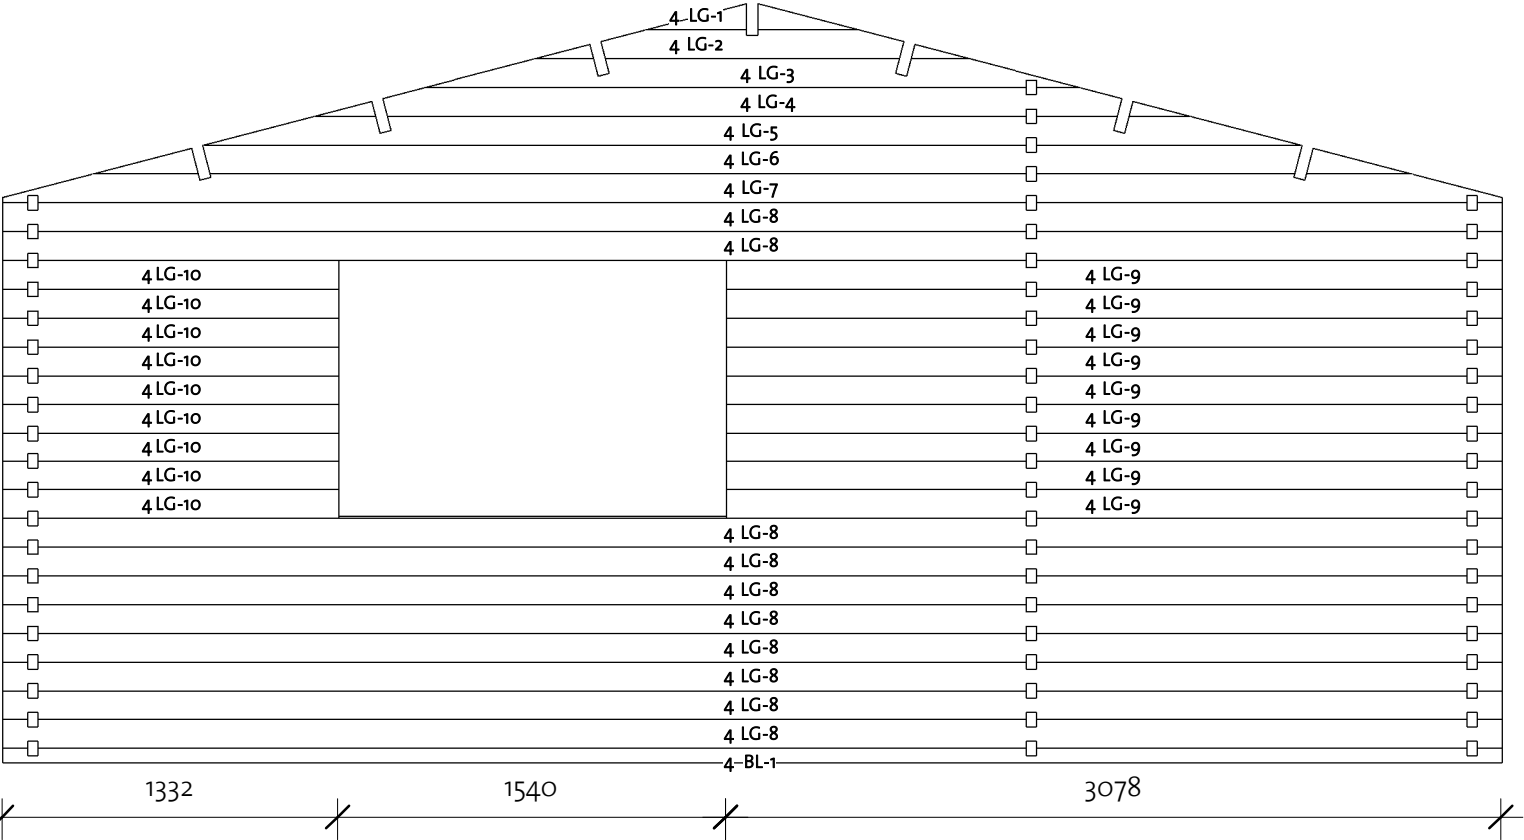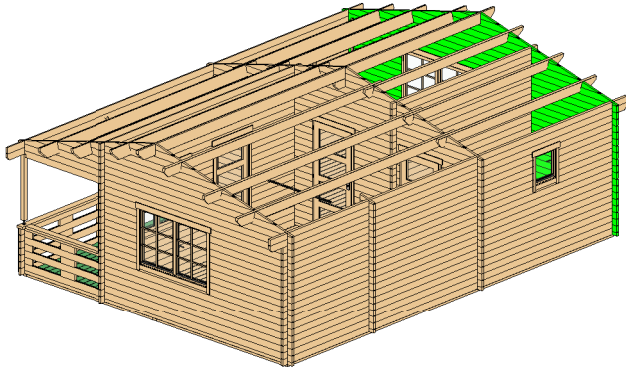

Wall 4			
Mark	Profile	Count	Cut Length

4BL-1	40X57	1	5950
4LG-1 *	40X114	1	837
4LG-2 *	40X114	1	1716
4LG-3 *	40X114	1	2594
4LG-4 *	40X114	1	3473
4LG-5 *	40X114	1	4352
4LG-6 *	40X114	1	5231
4LG-7 *	40X114	1	5950
4LG-8	40X114	10	5950
4LG-9	40X114	9	3078
4LG-10	40X114	9	1332

* Gable - delivered premounted

Log Profile Wall 4	
Profile	Profile

40X57	
40X114	

Kitchener 3 40 (575x760)


Wall A

Log Profile Wall A	
Profile	Profile

40X114	
--------	--


Log Profile Wall A	
Profile	Profile

40X114	
40X114	

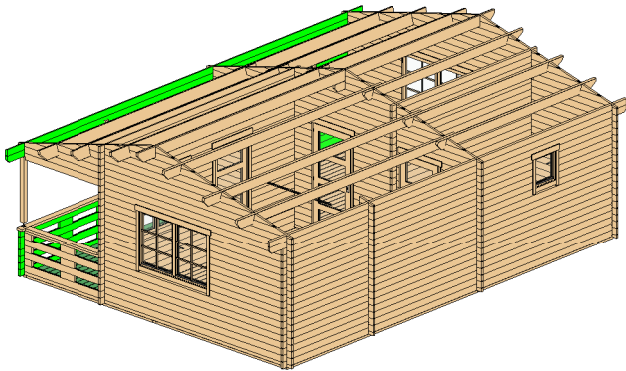


Wall A			
Mark	Profile	Count	Cut Length

ALG-1	40X114	1	3460
ALG-2	40X114	1	4840
ALG-3	40X114	1	1020
ALG-4	40X114	17	920
ALG-5	40X114	9	3380
ALG-6	40X114	6	300
ALG-7	40X114	3	300
ALG-8	40X114	1	2140
ALG-9	40X114	3	2140
ATL-1	40X114	1	3460
ATL-2	40X114	1	4840

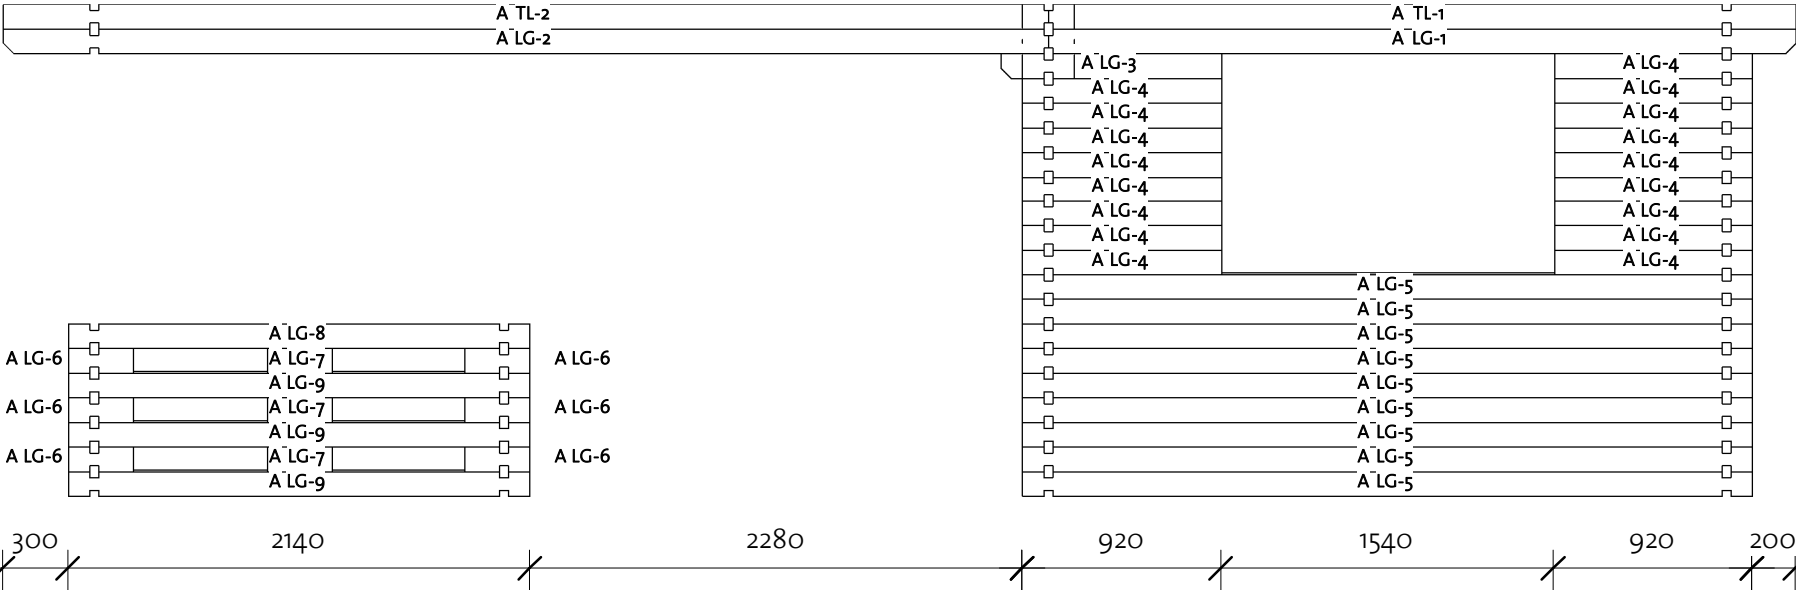


Kitchener 3 40 (575x760)

Wall B

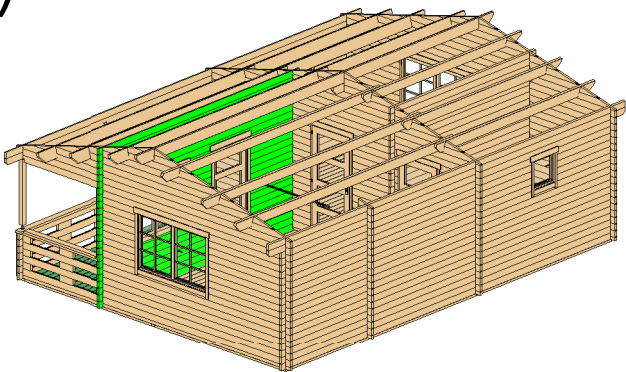

Wall B			
Mark	Profile	Count	Cut Length


BLG-1	40x114	9	575
BLG-2	40x114	5	4660
BLG-3	40x114	9	520
BLG-4	40x114	17	1175
BLG-5	40x114	1	4660
BLG-6	40x114	8	2635
BTL-1	40x114	1	4660

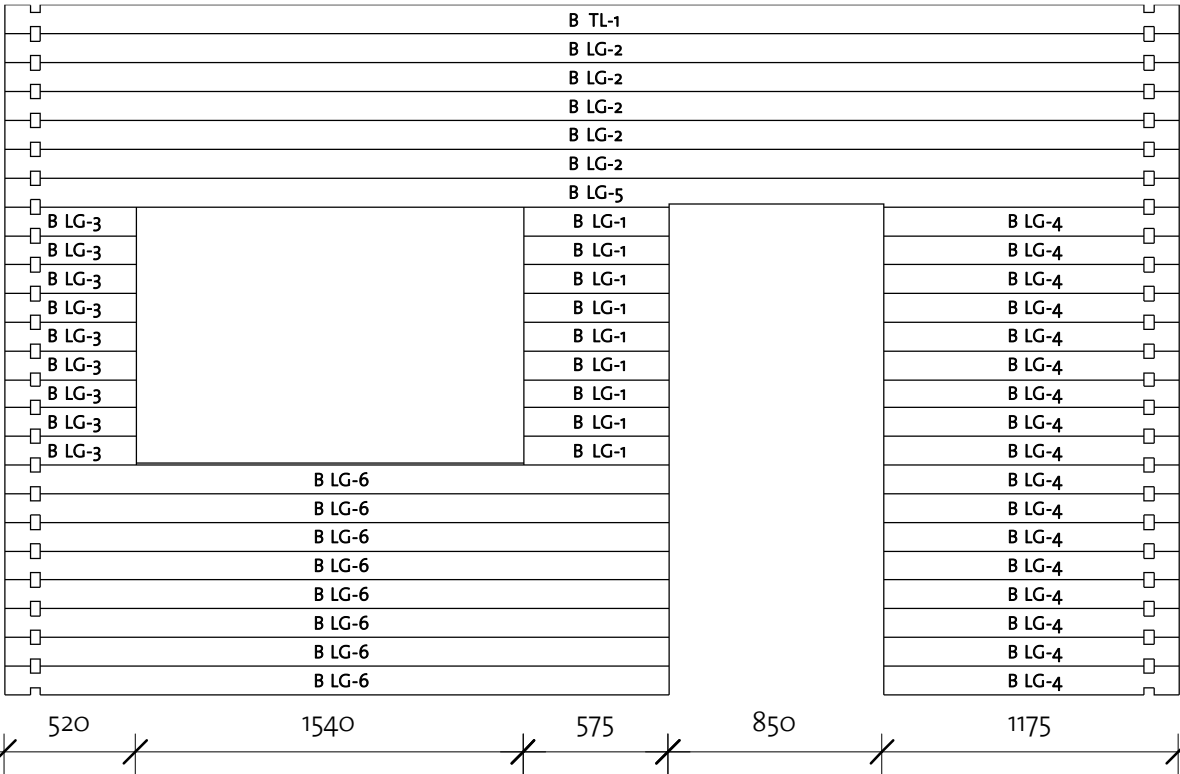

Log Profile Wall B	
Profile	Profile

40x114	
40x114	

Wall C

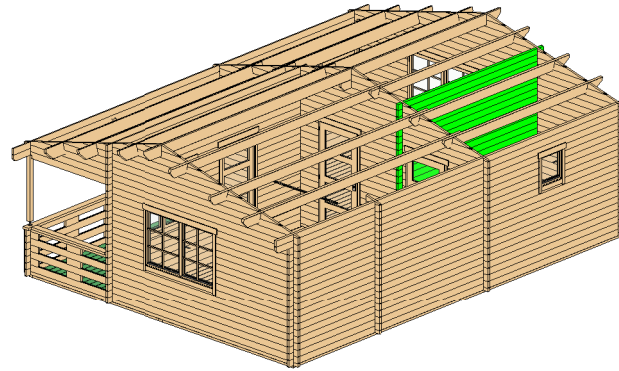

CLG-1	40X114	23	3380
CTL-1	40X111	1	3380

[illegible]

Log Profile Wall C	
Profile	Profile


4OX111	
4OX114	

Kitchener 3 40 (575x760)

Wall D

Log Profile Wall D	
Profile	Profile


40X114	
40X114	

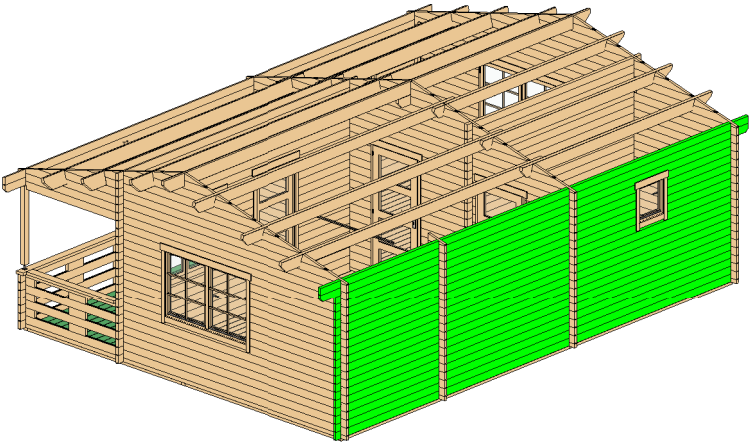

Wall D			
Mark	Profile	Count	Cut Length


DLG-1	40X114	1	4840
DLG-2	40X114	7	2020
DLG-3	40X114	5	5838
DLG-4	40X114	5	1418
DLG-5	40X114	6	3260
DLG-6	40X114	7	5780
DLG-7	40X114	6	4540
DLG-8	40X114	1	3460
DTL-1	40X114	1	3460
DTL-2	40X114	1	4840

D TL-2		D LG-1		D TL-1		D LG-8
D LG-2				D LG-6		
		D LG-3				D LG-4
		D LG-3				D LG-4
		D LG-3				D LG-4
		D LG-3				D LG-4
		D LG-3				D LG-4
			D LG-7			D LG-5
D LG-2				D LG-6		D LG-5
D LG-2			D LG-7	D LG-6		D LG-5
D LG-2		D LG-7		D LG-6		D LG-5
D LG-2		D LG-7		D LG-6		D LG-5
D LG-2		D LG-7		D LG-6		D LG-5
D LG-2		D LG-7		D LG-6		D LG-5
D LG-2		D LG-7		D LG-6		D LG-5
D LG-2		D LG-7		D LG-6		D LG-5



Kitchener 3 40 (575x760)

Roof 1



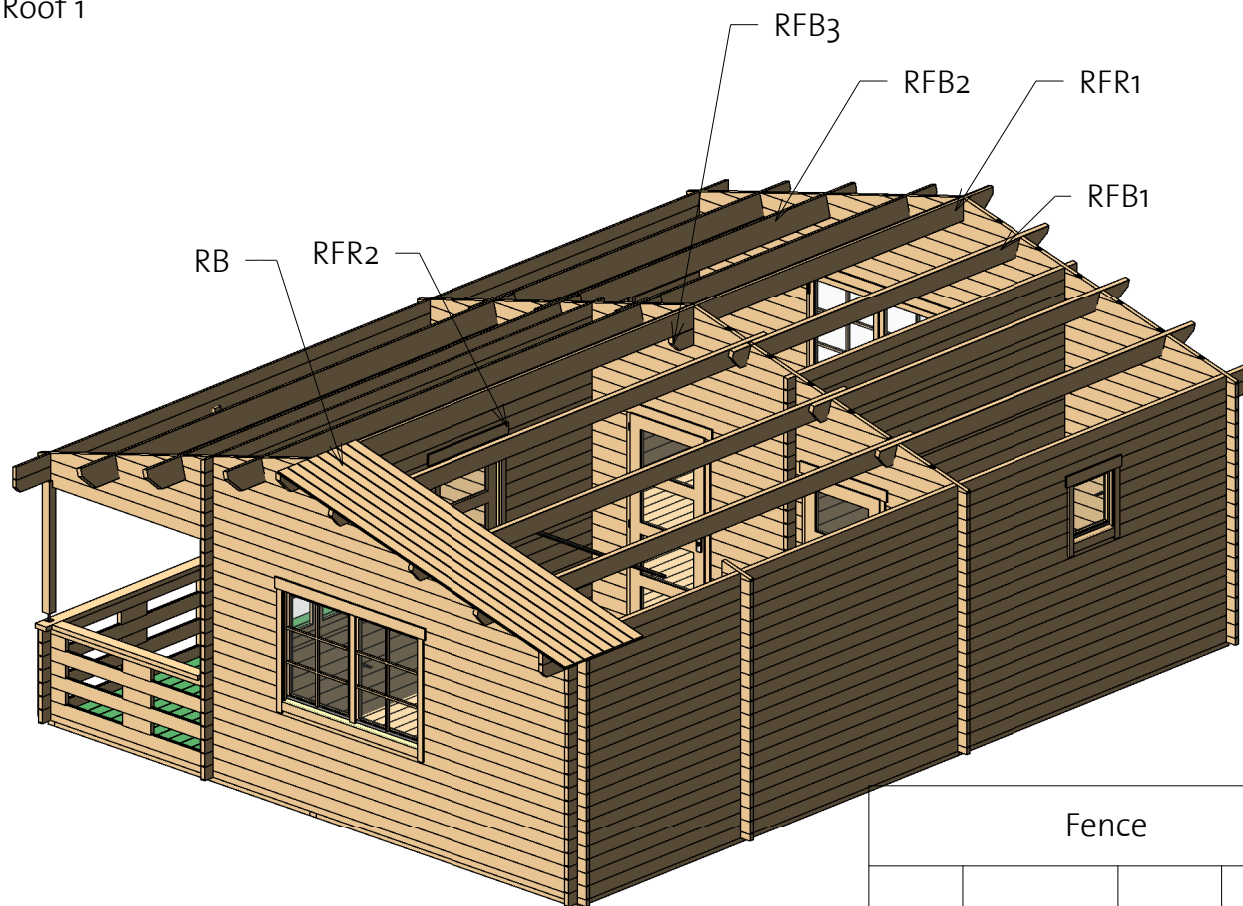


Columns			
Mark	Profile	Count	Length

CM1	Post 80x70	1	1129
CM2	Post 80x70	1	1184



Fence			
Mark	Type	Count	Cut Length

FN1	Fence 40x120	1	2140
FN2	Fence 40x120	1	1575

Roof				
Mark	Type	Profile	Count	Cut Length
RB	17x114		148	3223
RFB1	Beam 45x195		6	5060
RFB2	Beam 45x195		6	3680
RFB3	Beam 45x143		1	520
RFR1	Ridge 45x195		1	3460
RFR2	Ridge 45x195		1	4840

Kitchener 3 40 (575x760)


Roof 2

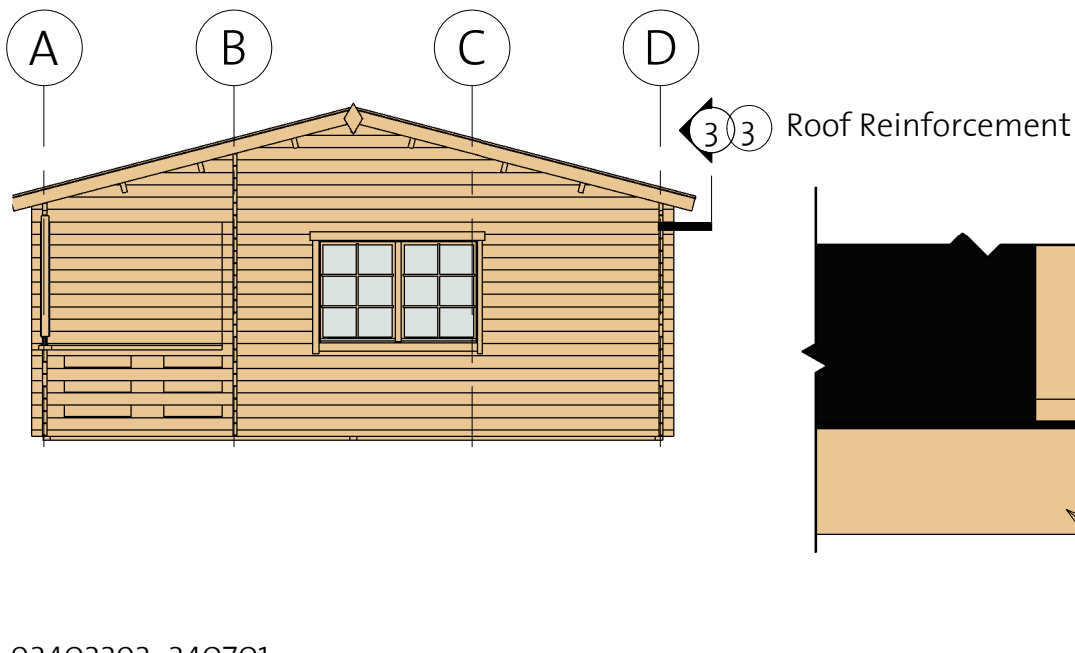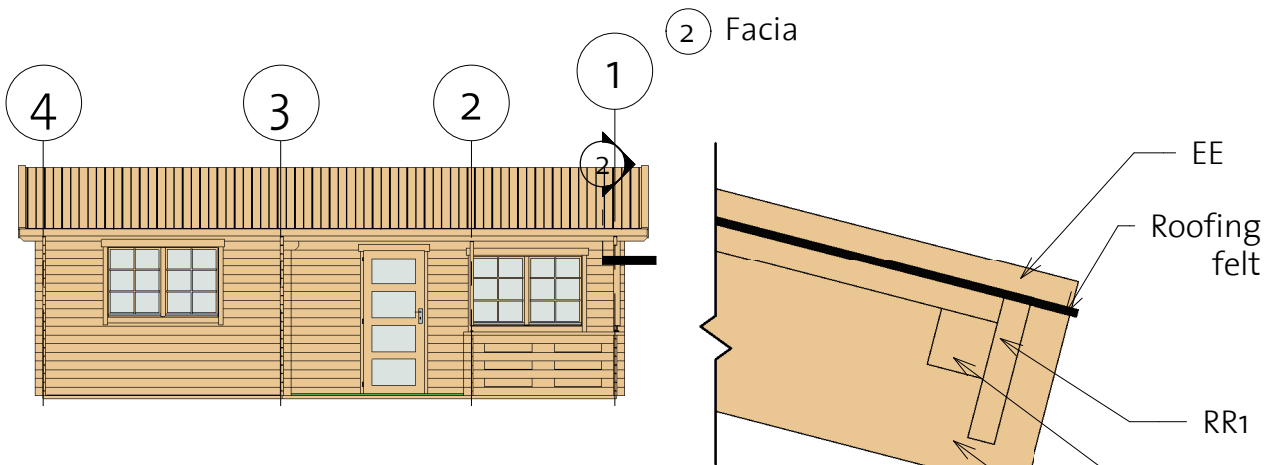

Fascia Schedule				
Mark	Type	Profile	Count	Length
EE	Eave Edging 18x95		4	3274
RF	Roof Fascia 18x120		4	3274
RR1	Roof reinforcement 18x95		4	4150
RR2	Roof reinforcement 38x38		4	4150

Kitchener 3 40 (575x760)

Extras

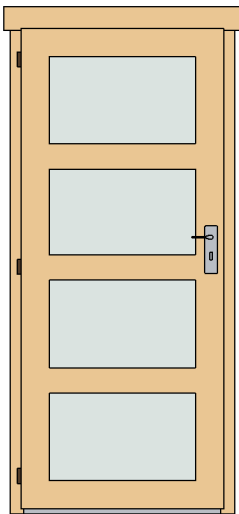

Door Schedule				
Model	Type	Width	Height	Count
CD2L	Classic door 2, four glass left	840	1955	3
DB	Door beam 850 mm	40	12	1



Fasteners/Extras		
Name	Type	Count

Hitblock	300-400 mm	
Adjustable post foot		2
Bolts	M8x70	21
Screws	5,0 x 70	50
Dowel	16,0 x 150	70
Nails	1,4 x 40	90
Screws	6,0 x 140	155
Screws	4,8 x 70	321
Screws	4,0 x 40	1729

Window Schedule				
Model	Type	Width	Height	Count
CDW1	Classic double window 1	1530	990	4
CW12R	Classic window 12, full glass righth	540	540	1
WCB6	Window Crossbar 6			8

Type	Count	Length
Windboard 18x40	7	2200

Type	Count
Romb	2

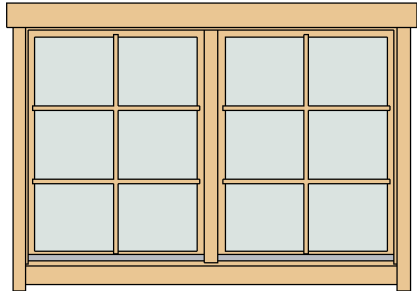

Kitchener 3 40 (575x760)

List of all items 1

Impregnated foundation beams

Mark	Type	Profile	Count	Length
IFB1	IFB 70x40		32	2765
IFB2	IFB 70x40		3	4435
IFB3	IFB 70x40		3	3155
IFB4	IFB 70x40		2	476

Floor Schedule

Mark	Type	Profile	Count	Length
FB1	FB 17x114		35	4374
FB2	FB 17x114		50	3094
TB	TB 28x120		14	4375

BB 1	BB 18x40		5	3200
BB 2	BB 18x40		5	4400

Roof

Mark	Type	Profile	Count	Cut Length
RB	17x114		148	3223
RFB1	Beam 45x195		6	5060
RFB2	Beam 45x195		6	3680
RFB3	Beam 45x143		1	520
RFR1	Ridge 45x195		1	3460
RFR2	Ridge 45x195		1	4840

Columns

Mark	Profile	Count	Length
CM1	Post 80x70	1	1129
CM2	Post 80x70	1	1184

Fence

Mark	Type	Count	Cut Length
FN1	Fence 40x120	1	2140
FN2	Fence 40x120	1	1575

Kitchener 3 40 (575x760)

List of all items 2

Fascia Schedule				
Mark	Type	Profile	Count	Length
EE	Eave Edging 18x95		4	3274
RF	Roof Fascia 18x120		4	3274
RR1	Roof reinforcement 18x95		4	4150
RR2	Roof reinforcement 38x38		4	4150

Wall 2			
Mark	Profile	Count	Cut Length

2BL-1	40x57	2	300
2LG-1	40x57	1	300
2LG-2	40x114	25	300
2LG-3	40x114	1	300

Wall 1			
Mark	Profile	Count	Cut Length

1BL-1	40x57	1	5950
1LG-1 *	40x114	1	837
1LG-2 *	40x114	1	1716
1LG-3 *	40x114	1	2594
1LG-4 *	40x114	1	3473
1LG-5 *	40x114	1	4277
1LG-6 *	40x114	1	5231
1LG-7 *	40x114	1	5950
1LG-8	40x114	4	5950
1LG-9	40x114	1	5950
1LG-10	40x114	4	4190
1LG-11	40x114	9	860
1LG-12	40x114	9	1790
1LG-13	40x114	1	5950
1LG-14	40x114	3	300
1LG-15	40x114	3	300

* Gable - delivered premounted

Kitchener 3 40 (575x760)

List of all items 3

Wall 3

Mark	Profile	Count	Cut Length
------	---------	-------	------------

3BL-1	40x57	1	2314
3BL-2	40x57	1	1040
3BL-3	40x57	1	896
3LG-1 *	40x114	1	837
3LG-2 *	40x114	1	1716
3LG-3 *	40x114	1	2594
3LG-4 *	40x114	1	3473
3LG-5 *	40x114	1	4277
3LG-6 *	40x114	1	5231
3LG-7 *	40x114	1	5950
3LG-8	40x114	2	5950
3LG-9	40x114	17	2314
3LG-10	40x114	17	1040
3LG-11	40x114	17	896

Wall A

Mark	Profile	Count	Cut Length
------	---------	-------	------------

ALG-1	40x114	1	3460
ALG-2	40x114	1	4840
ALG-3	40x114	1	1020
ALG-4	40x114	17	920
ALG-5	40x114	9	3380
ALG-6	40x114	6	300
ALG-7	40x114	3	300
ALG-8	40x114	1	2140
ALG-9	40x114	3	2140
ATL-1	40x114	1	3460
ATL-2	40x114	1	4840

Wall 4

Mark	Profile	Count	Cut Length
------	---------	-------	------------

4BL-1	40x57	1	5950
4LG-1 *	40x114	1	837
4LG-2 *	40x114	1	1716
4LG-3 *	40x114	1	2594
4LG-4 *	40x114	1	3473
4LG-5 *	40x114	1	4352
4LG-6 *	40x114	1	5231
4LG-7 *	40x114	1	5950
4LG-8	40x114	10	5950
4LG-9	40x114	9	3078
4LG-10	40x114	9	1332

* Gable - delivered premounted

Wall B

Mark	Profile	Count	Cut Length
------	---------	-------	------------

BLG-1	40x114	9	575
BLG-2	40x114	5	4660
BLG-3	40x114	9	520
BLG-4	40x114	17	1175
BLG-5	40x114	1	4660
BLG-6	40x114	8	2635
BTL-1	40x114	1	4660

Kitchener 3 40 (575x760)

List of all items 4

Wall C			
Mark	Profile	Count	Cut Length

CLG-1	40X114	23	3380
CTL-1	40X111	1	3380

Wall D			
Mark	Profile	Count	Cut Length

DLG-1	40X114	1	4840
DLG-2	40X114	7	2020
DLG-3	40X114	5	5838
DLG-4	40X114	5	1418
DLG-5	40X114	6	3260
DLG-6	40X114	7	5780
DLG-7	40X114	6	4540
DLG-8	40X114	1	3460
DTL-1	40X114	1	3460
DTL-2	40X114	1	4840

Log profiles	
Profile	Images4


40X57	
40X57	
40X114	
40X111	
40X114	
40X114	
40X114	

Windboard

① Windboard Assembly 1



② Windboard Assembly 2

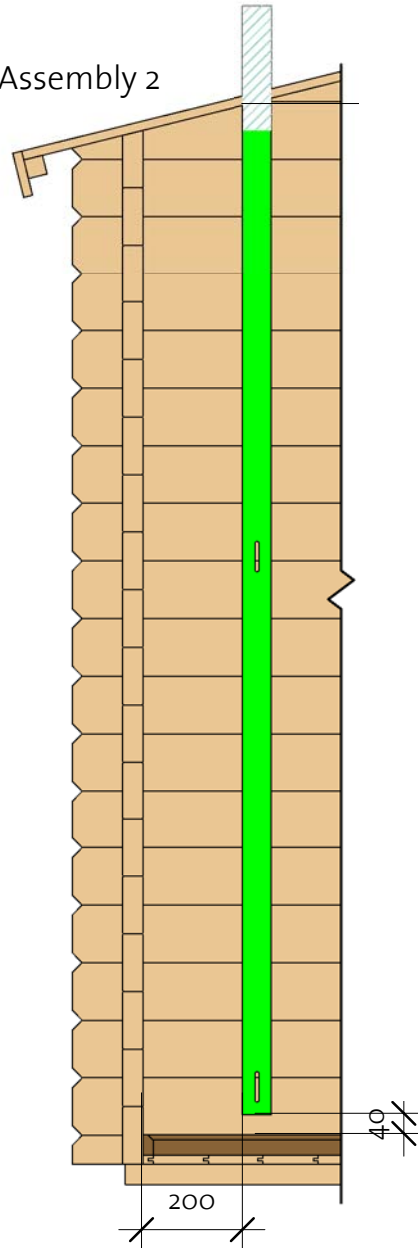

③ Windboard Assembly 3

