

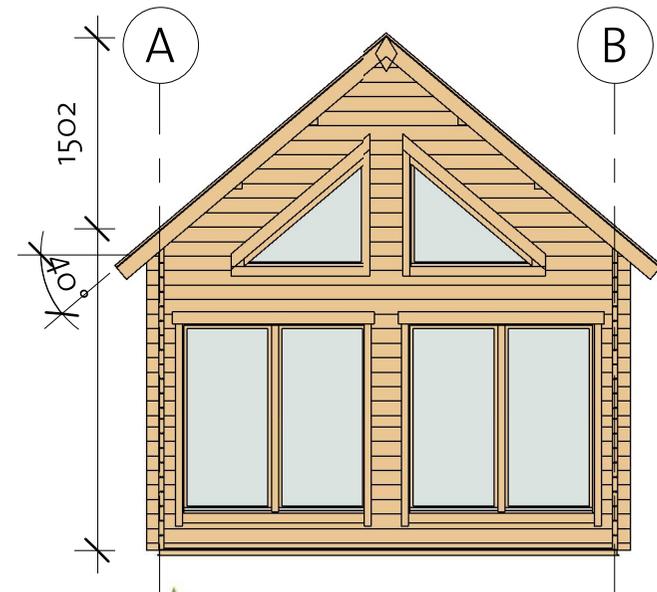


# Maple Bunkie 40 (366x396)

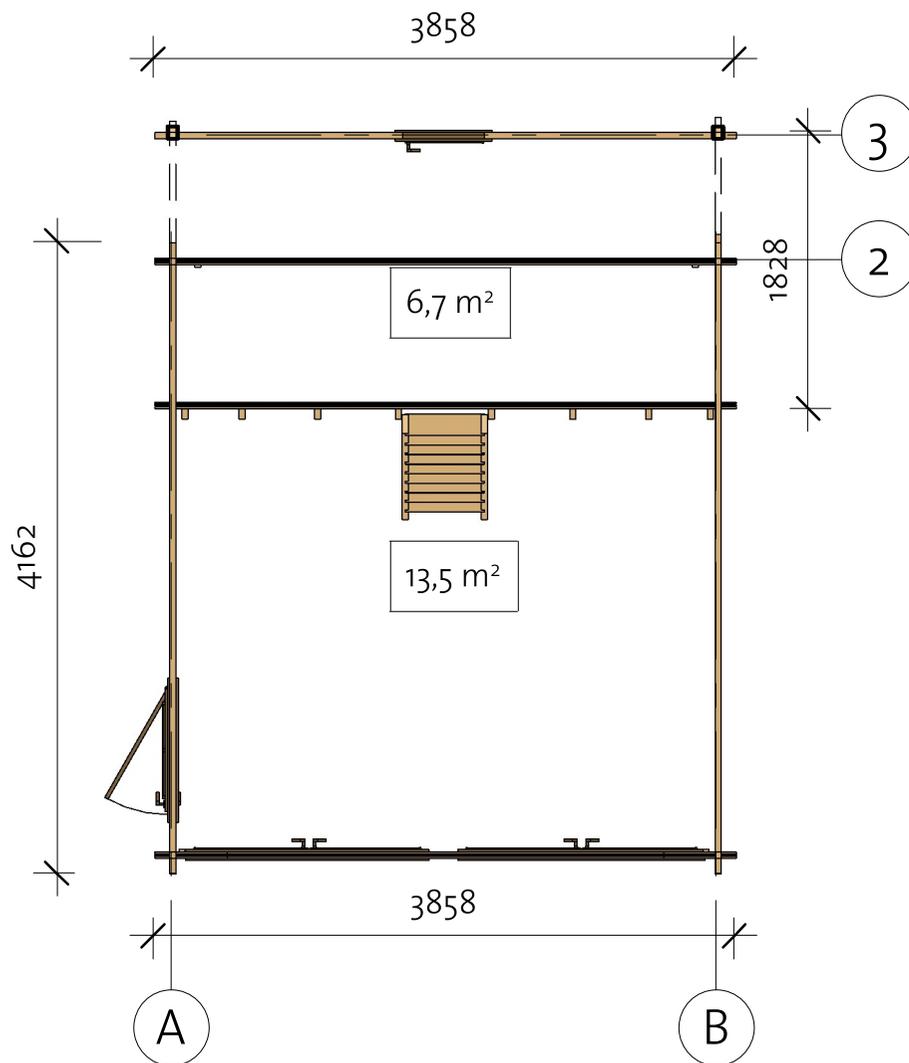

# Maple Bunkie 40 (366x396)


Foundation

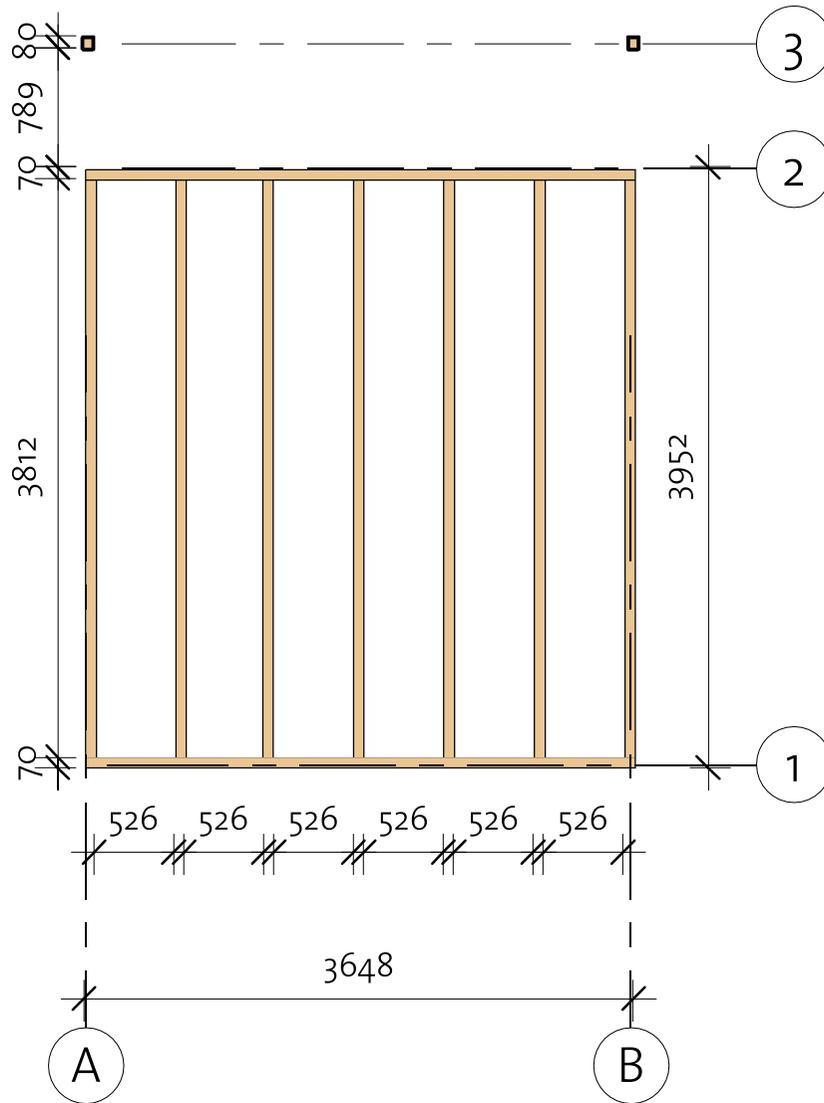


Impregnated foundation beams				
Mark	Type	Profile	Count	Length
IFB1	IFB 70x40		7	3812
IFB2	IFB 70x40		2	3648

# Maple Bunkie 40 (366x396)

Floor Plan

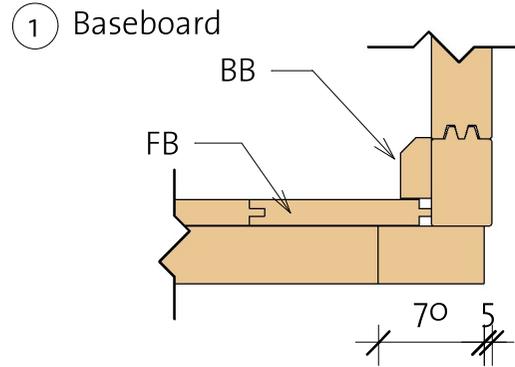





Floor Schedule				
Mark	Type	Profile	Count	Length
FB1	FB 17x114		35	3582
BB1	BB 20x40		2	3600
BB2	BB 20x40		2	3900

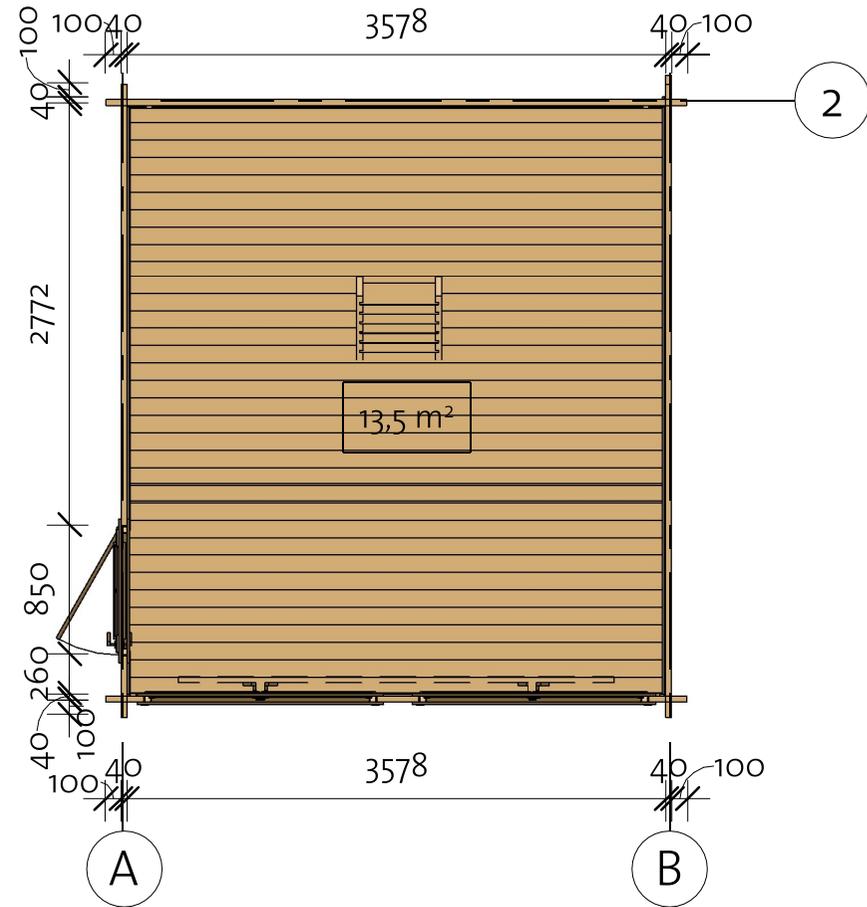

# Maple Bunkie 40 (366x396)

Wall 1


Log Profile Wall 1	
Profile	Profile

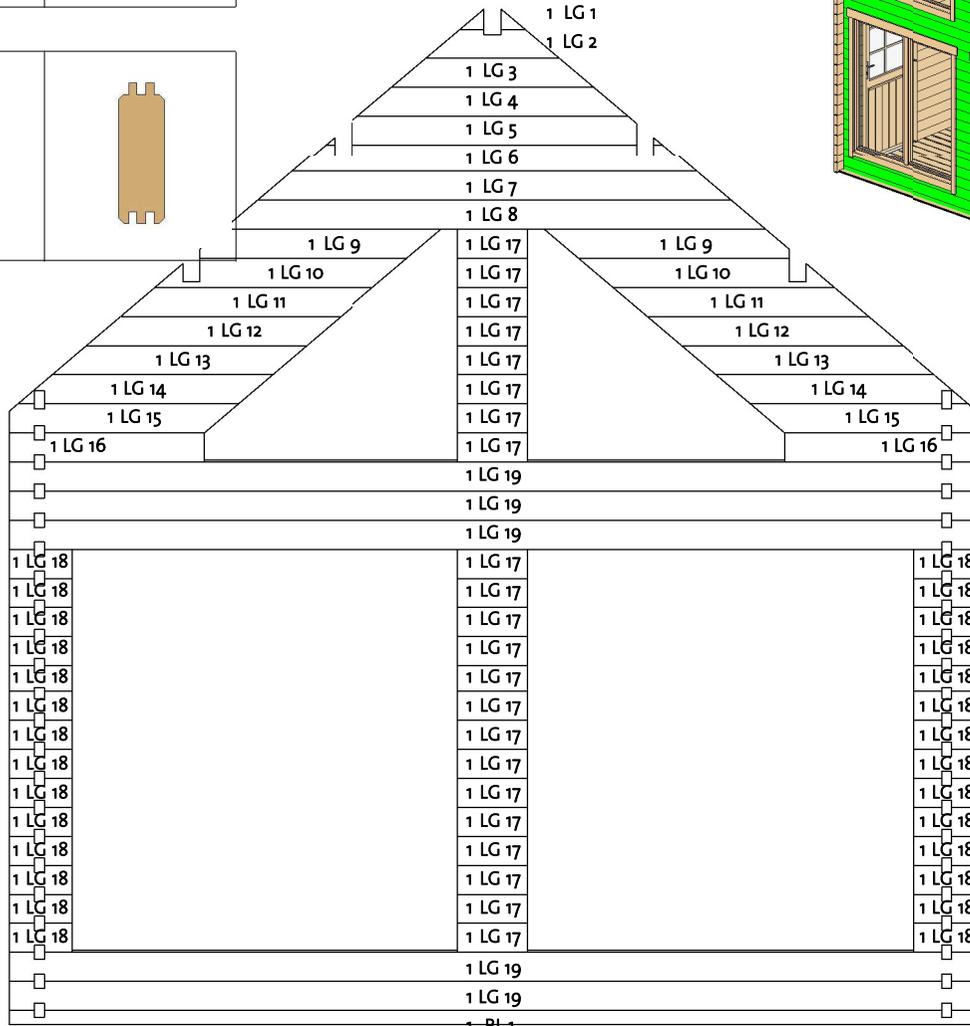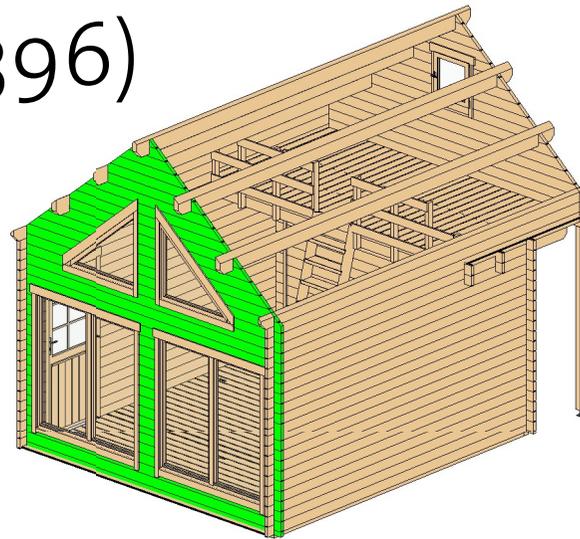

Wall 1			
Mark	Profile	Count	Cut Length

1BL 1	40X57	1	3858
1LG 1 *	40X114	1	258
1LG 2 *	40X114	1	529
1LG 3 *	40X114	1	801
1LG 4 *	40X114	1	1072
1LG 5 *	40X114	1	1344
1LG 6 *	40X114	1	1615
1LG 7 *	40X114	1	1887
1LG 8 *	40X114	1	2158
1LG 9 *	40X114	2	977
1LG 10 *	40X114	2	1020
1LG 11 *	40X114	2	1020
1LG 12 *	40X114	2	1020
1LG 13 *	40X114	2	1020
1LG 14 *	40X114	2	1020
1LG 15 *	40X114	2	920
1LG 16 *	40X114	2	775
1LG 17 *	40X114	22	278
1LG 18	40X114	28	250
1LG 19	40X114	5	3858

Log Profile Wall 1	
Profile	Profile





\* Gable - delivered premounted



# Maple Bunkie 40 (366x396)

Wall 3

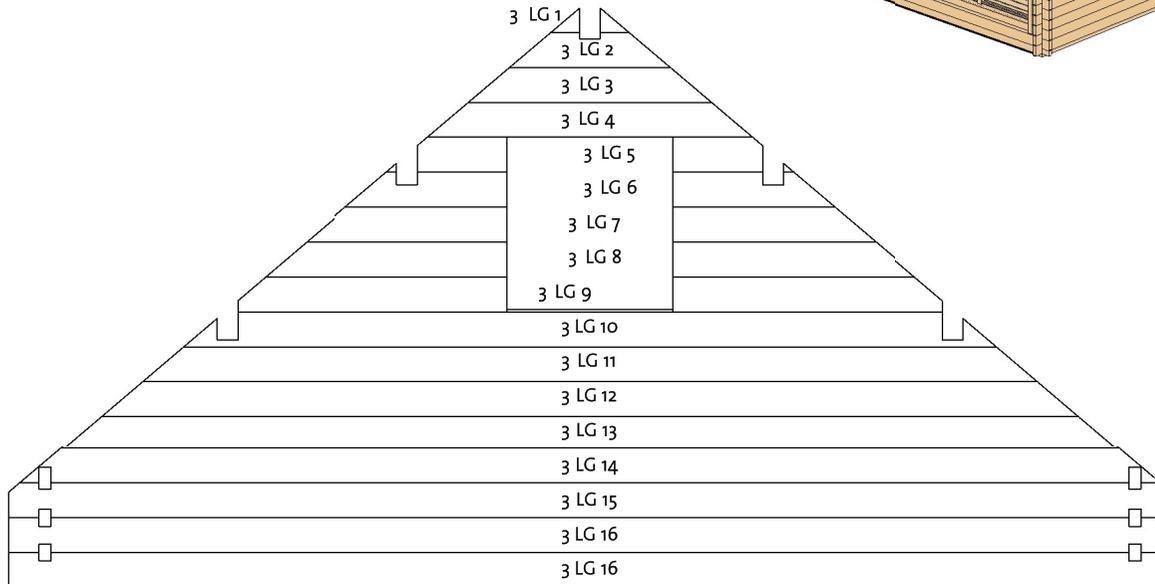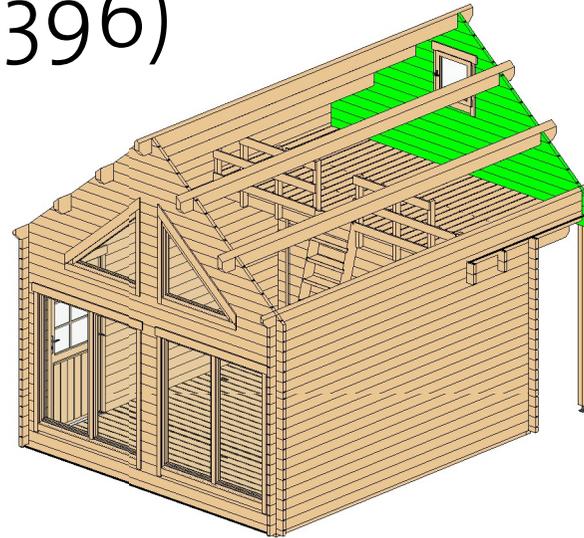

Wall 3			
Mark	Profile	Count	Cut Length

3LG 1 *	40X114	1	258
3LG 2 *	40X114	1	529
3LG 3 *	40X114	1	801
3LG 4 *	40X114	1	1072
3LG 5 *	40X114	2	399
3LG 6 *	40X114	2	535
3LG 7 *	40X114	2	671
3LG 8 *	40X114	2	807
3LG 9 *	40X114	2	900
3LG 10*	40X114	1	2701
3LG 11*	40X114	1	2973
3LG 12*	40X114	1	3245
3LG 13*	40X114	1	3516
3LG 14*	40X114	1	3788
3LG 15*	40X114	1	3858
3LG 16	40X114	2	3858


\* Gable - delivered premounted

Log Profile Wall 3	
Profile	Profile

40X114	
--------	--


# Maple Bunkie 40 (366x396)

Wall A

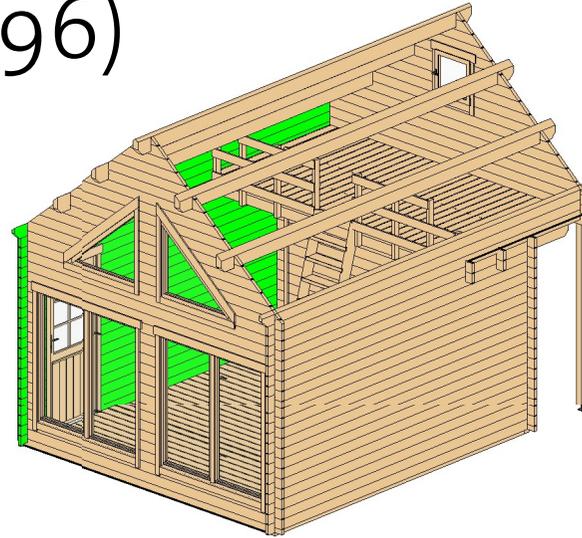

Wall A			
Mark	Profile	Count	Cut Length

ALG 2	40x114	1	4986
ALG 3	40x114	1	4986
ALG 4	40x114	1	4650
ALG 5	40x114	1	4162
ALG 6	40x114	17	2912
ALG 7	40x114	17	400
ATL 1	40x145	1	5186

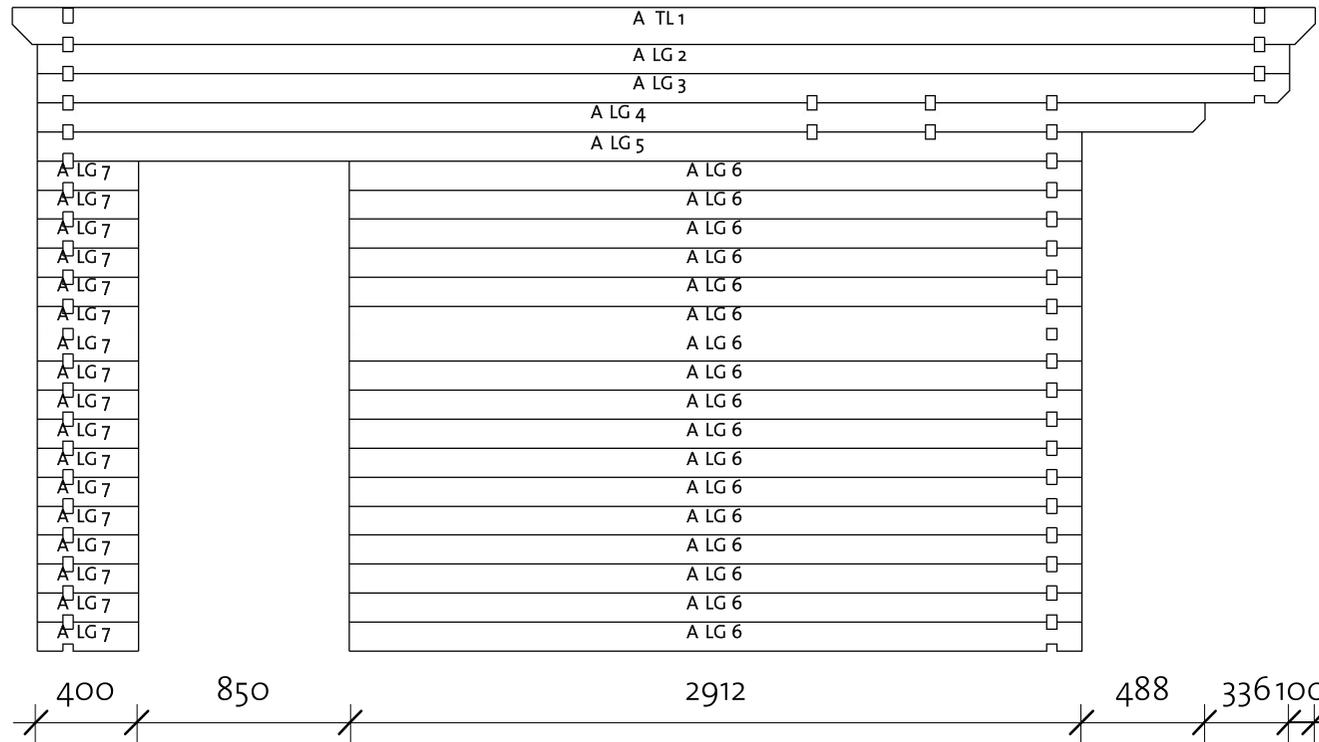


Log Profile Wall A	
Profile	Profile

40x114	
40x145	


# Maple Bunkie 40 (366x396)

Wall B

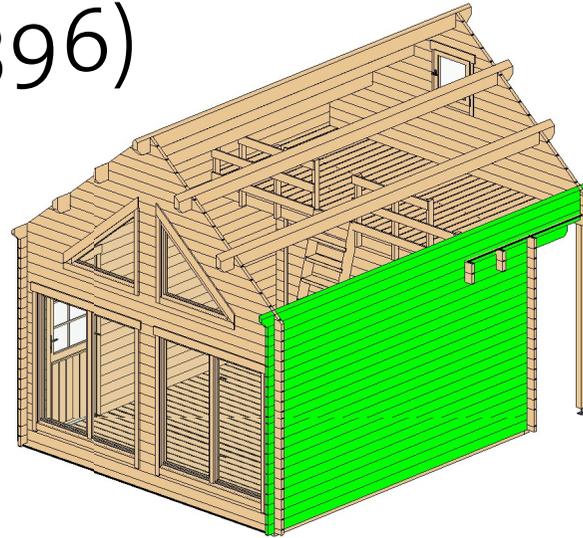

Wall B			
Mark	Profile	Count	Cut Length

BLG 1	40x114	18	4162
BLG 2	40x114	1	4986
BLG 3	40x114	1	4986
BLG 4	40x114	1	4650
BTL 1	40x145	1	5186

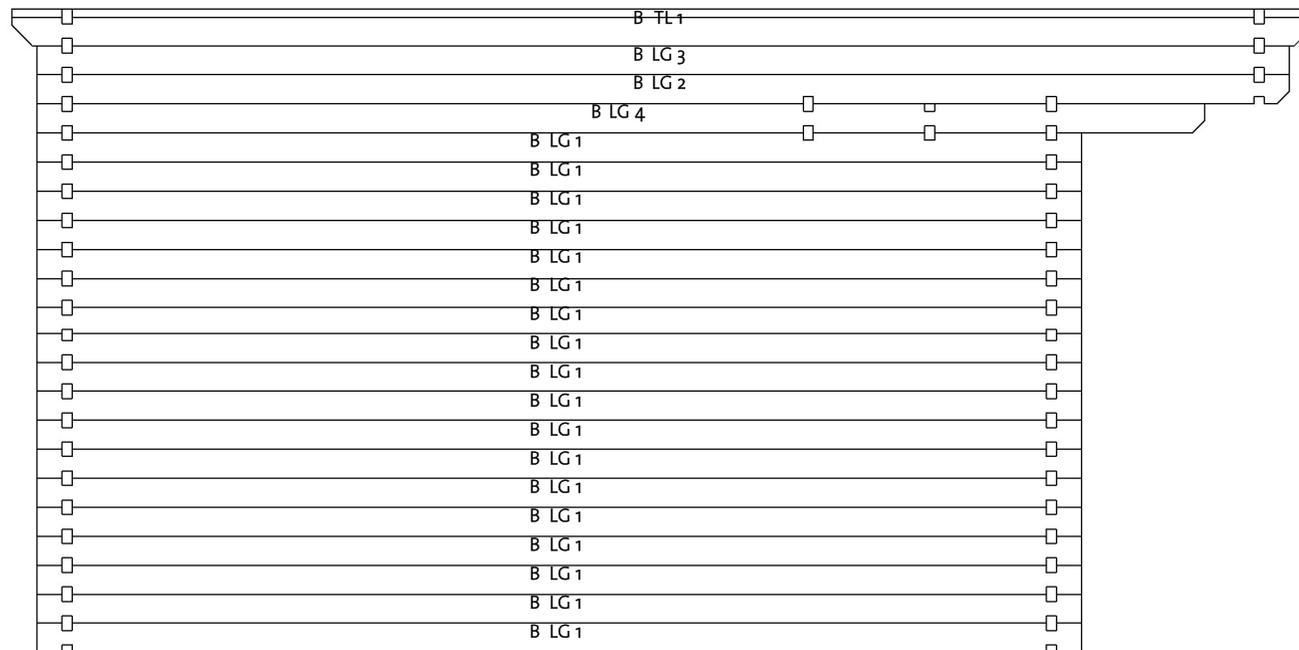


Log Profile Wall B	
Profile	Profile

40x114	
40x145	



# Maple Bunkie 40 (366x396)

Second floor

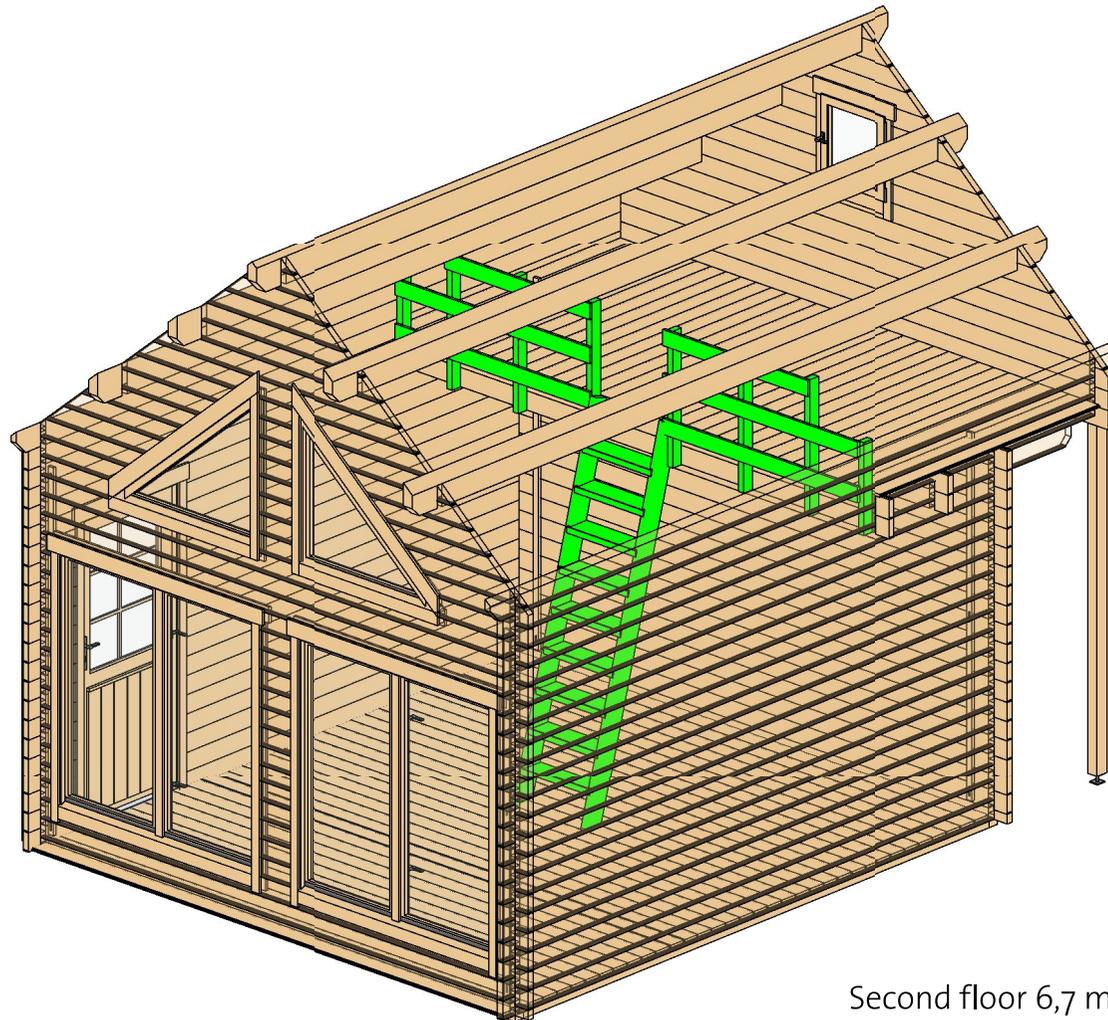


Second floor 6,7 m2

Second floor				
Mark	Type	Profile	Count	Cut Length
FN1	Fence 40x70		2	550
FN2	Fence 40x70		6	810
FN3	Fence 18x95		4	1473
FN4	Fence 18x95		2	1097

Floor Schedule 2				
Mark	Type	Profile	Count	Length
FB2	FB 17x114		32	1788

# Maple Bunkie 40 (366x396)

Roof 1

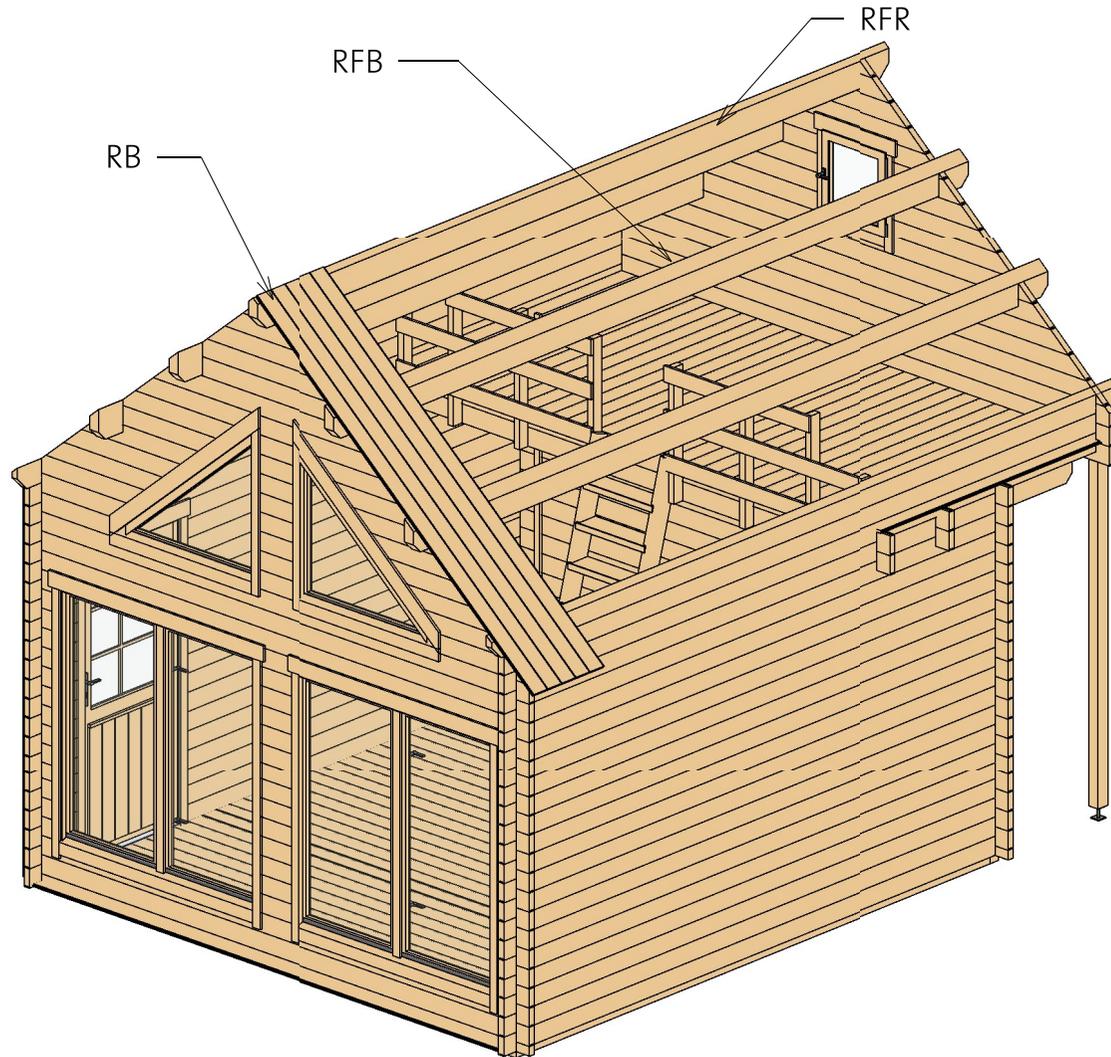


Roof				
Mark	Type	Profile	Count	Length
RB	17x114		90	2765
RFB	Beam 68x193		4	5186
RFR	Ridge 68x193		1	5186


Columns			
Mark	Type	Length	Count
CM	Post 80x70	2131	2

# Maple Bunkie 40 (366x396)



Roof 2

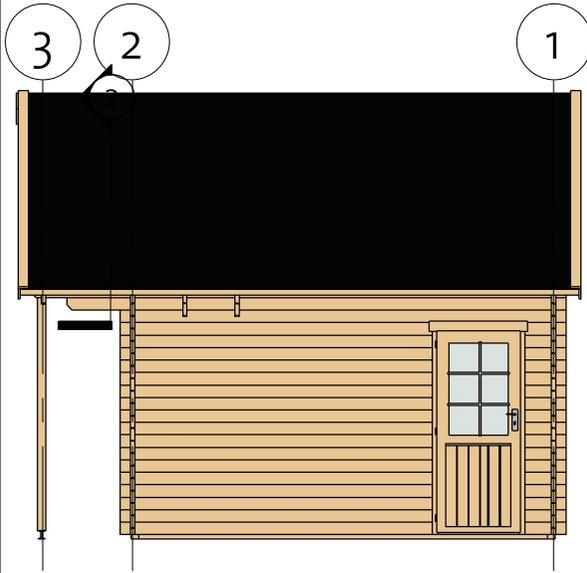

② Facia

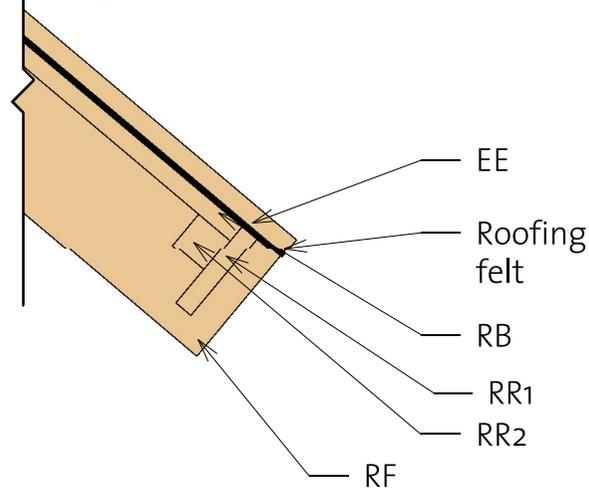

③ Roof Reinforcement

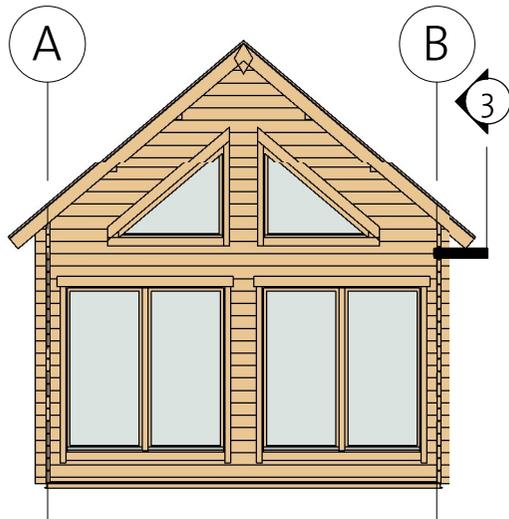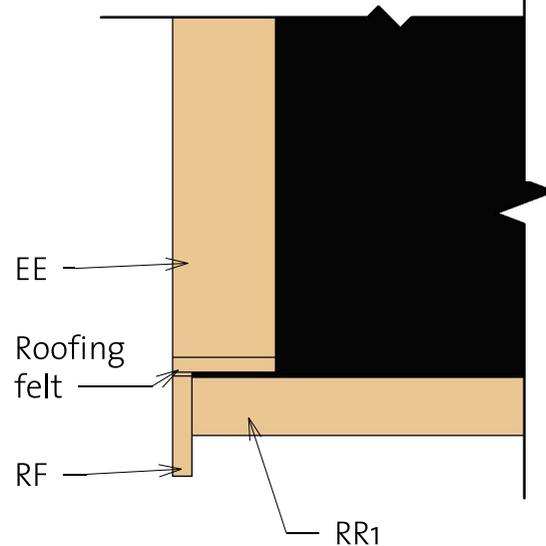

Fascia Schedule				
Mark	Type	Profile	Count	Length
EE	Eave Edging 18x95		4	2826
RF	Roof Fascia 18x120		4	2826
RR1	Roof reinforcement 18x95		2	5204
RR2	Roof reinforcement 38x38		2	5204

# Maple Bunkie 40 (366x396)

Extras



Door Schedule				
Model	Type	Width	Height	Count
CD1L	Classic door 1 left	840	1890	1
DCB6-5	Door Crossbar 6-5	--	--	1

Type	Count	Length
------	-------	--------

Windboard 18x40	4	2200
-----------------	---	------

Family	Count
--------	-------




Romb	2
------	---



Window Schedule				
Model	Type	Width	Height	Count

CDW4	Classic double window 4	1530	1555	2
CW12R	Classic window 12 right	540	540	1
CW25	Classic window 25	1100	1026	1
CW26	Classic window 26	1100	1026	1

WCB8	Windows Crossbar 8	--	--	4
------	--------------------	----	----	---

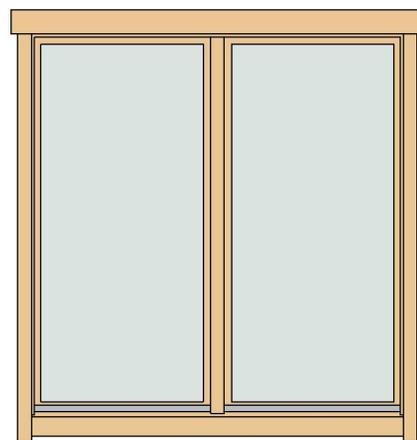

Fasteners & Extras		
Name	Type	Count

Hitblock	300-400 mm	
Adjustable post foot		2
Bolts	M8 x 70	12
Screws	5,0 x 70	15
Screws	6,0 x 140	35
Nails	1,4 x 40	35
Screws	4,0 x 40	700

250403

- \* Windows intended for tilt opening only!
- \* Fenster zur Eröffnung nur zum Kippen vorgesehen!
- \* Aknad on ette nähtud ainult kaldu avamiseks!



# Maple Bunkie 40 (366x396)

## List of all items 1

Impregnated foundation beams				
Mark	Type	Profile	Count	Length


IFB1	IFB 70x40		7	3812
IFB2	IFB 70x40		2	3648

Floor Schedule				
Mark	Type	Profile	Count	Length

FB1	FB 17x114		35	3582
-----	-----------	---	----	------

BB1	BB 20x40		2	3600
BB2	BB 20x40		2	3900

Roof				
Mark	Type	Profile	Count	Length

RB	17x114		90	2765
RFB	Beam 68x193		4	5186
RFR	Ridge 68x193		1	5186

Fascia Schedule				
Mark	Type	Profile	Count	Length

EE	Eave Edging 18x95		4	2826
RF	Roof Fascia 18x120		4	2826
RR1	Roof reinforcement 18x95		2	5204
RR2	Roof reinforcement 38x38		2	5204

# Maple Bunkie 40 (366x396)

## List of all items 2

Wall 1			
Mark	Profile	Count	Cut Length

1BL 1	40X57	1	3858
1LG 1 *	40X114	1	258
1LG 2 *	40X114	1	529
1LG 3 *	40X114	1	801
1LG 4 *	40X114	1	1072
1LG 5 *	40X114	1	1344
1LG 6 *	40X114	1	1615
1LG 7 *	40X114	1	1887
1LG 8 *	40X114	1	2158
1LG 9 *	40X114	2	977
1LG 10 *	40X114	2	1020
1LG 11 *	40X114	2	1020
1LG 12 *	40X114	2	1020
1LG 13 *	40X114	2	1020
1LG 14 *	40X114	2	1020
1LG 15 *	40X114	2	920
1LG 16	40X114	2	775
1LG 17	40X114	22	278
1LG 18	40X114	28	250
1LG 19	40X114	5	3858

Wall 2			
Mark	Profile	Count	Cut Length

2LG 1	40X114	18	3858
2LG 2	40X114	1	3858
2BL 1	40X57	1	3858

Wall 3			
Mark	Profile	Count	Cut Length

3LG 1 *	40X114	1	258
3LG 2 *	40X114	1	529
3LG 3 *	40X114	1	801
3LG 4 *	40X114	1	1072
3LG 5 *	40X114	2	399
3LG 6 *	40X114	2	535
3LG 7 *	40X114	2	671
3LG 8 *	40X114	2	807
3LG 9 *	40X114	2	900
3LG 10 *	40X114	1	2701
3LG 11 *	40X114	1	2973
3LG 12 *	40X114	1	3245
3LG 13 *	40X114	1	3516
3LG 14 *	40X114	1	3788
3LG 15 *	40X114	1	3858
3LG 16	40X114	2	3858

\*Gable-delivered premounted


# Maple Bunkie 40 (366x396)

## List of all items 3

Wall A			
Mark	Profile	Count	Cut Length

ALG 2	40x114	1	4986
ALG 3	40x114	1	4986
ALG 4	40x114	1	4650
ALG 5	40x114	1	4162
ALG 6	40x114	17	2912
ALG 7	40x114	17	400
ATL 1	40x145	1	5186

Log Profiles 1	
Profile	Profile

40x57	
40x114	
40x145	

Wall B			
Mark	Profile	Count	Cut Length

BLG 1	40x114	18	4162
BLG 2	40x114	1	4986
BLG 3	40x114	1	4986
BLG 4	40x114	1	4650
BTL 1	40x145	1	5186

Second floor				
Mark	Type	Profile	Count	Cut Length

FN1	Fence 40x70		2	550
FN2	Fence 40x70		6	810
FN3	Fence 18x95		4	1473
FN4	Fence 18x95		2	1097

Floor Schedule 2				
Mark	Type	Profile	Count	Length

FB2	FB 17x114		32	1788
-----	-----------	--	----	------

Post			
Mark	Profile	Count	Length

CM	Post 80x70	2	2131
----	------------	---	------