

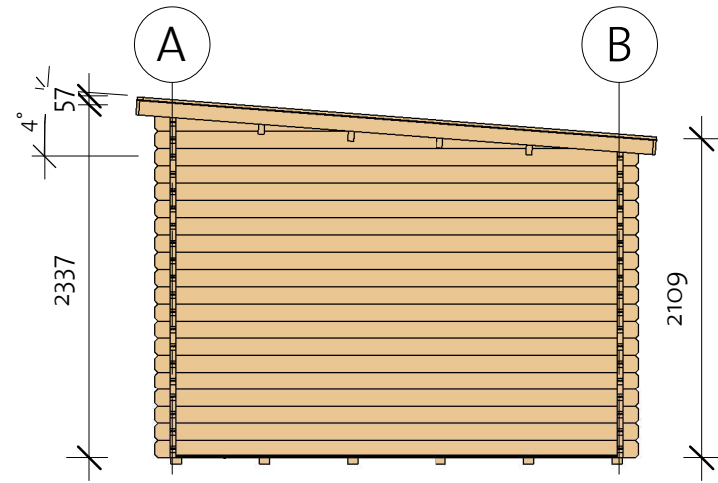


# Matzuga 40 (300x575)

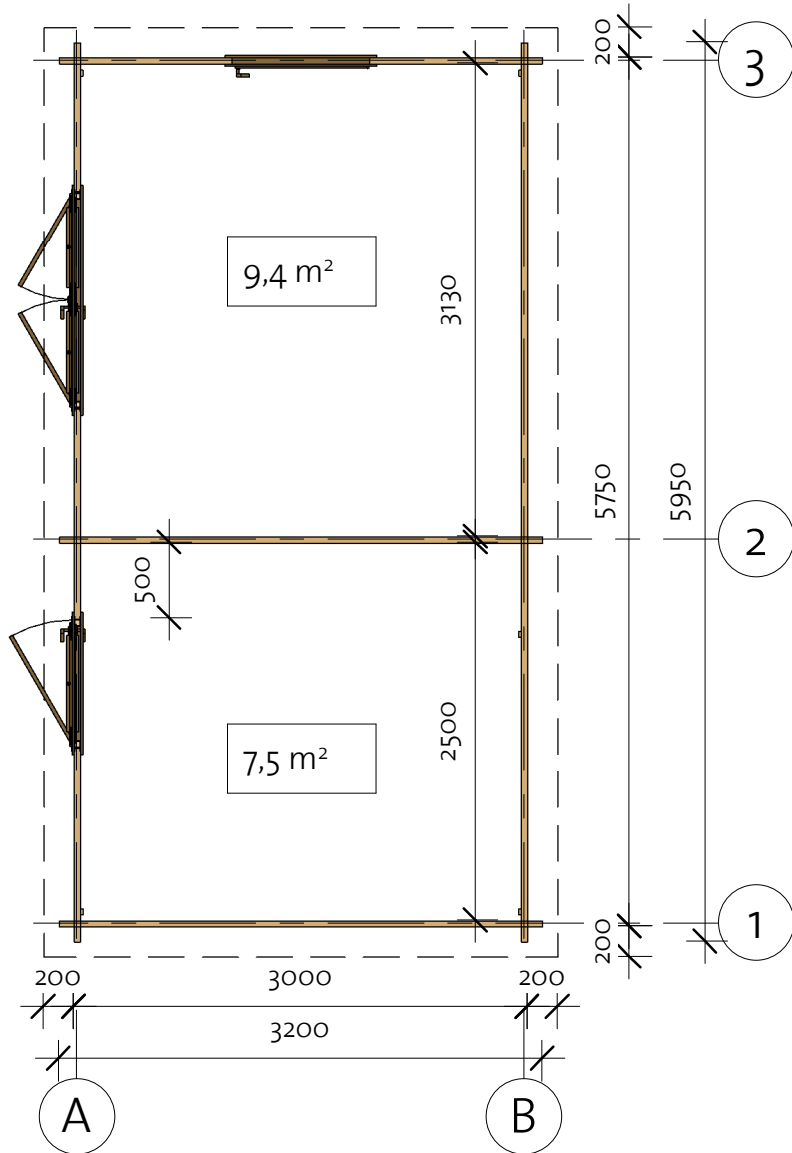


# Matzuga 40 (300x575)

Foundation

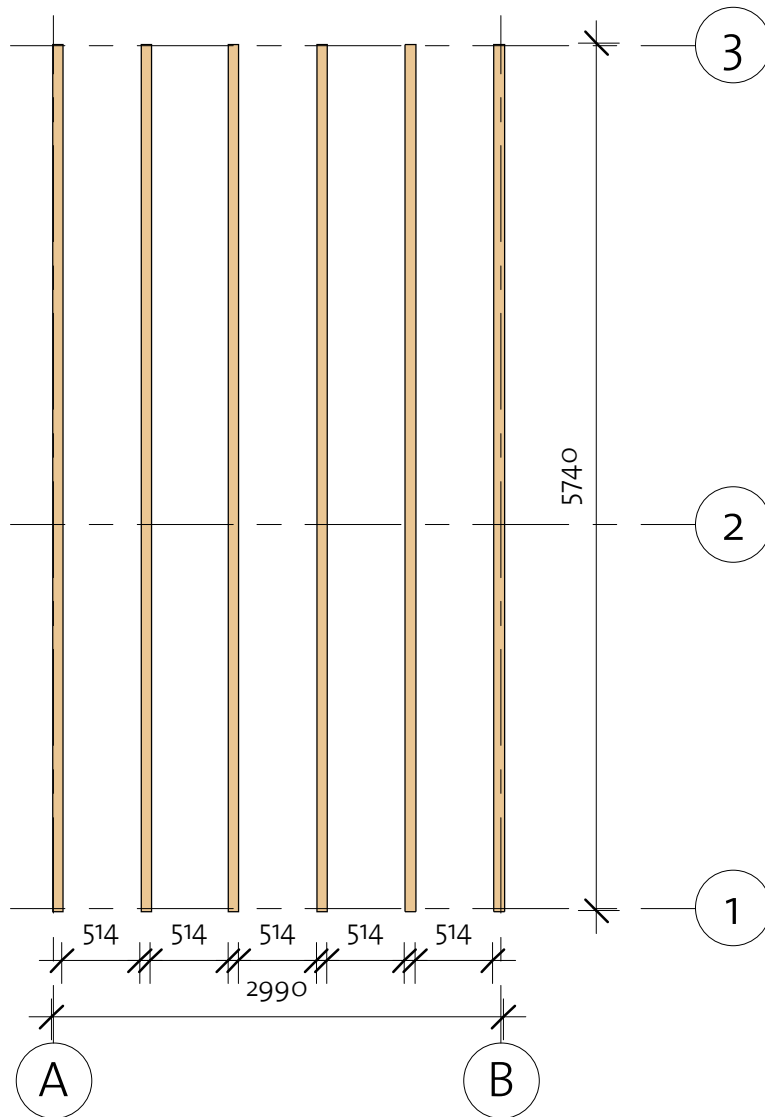


Impregnated foundation beams				
Mark	Type	Profile	Count	Length

IFB	IFB 70x40		6	5740
-----	--------------	---	---	------



# Matzuga 40 (300x575)


Floor Plan

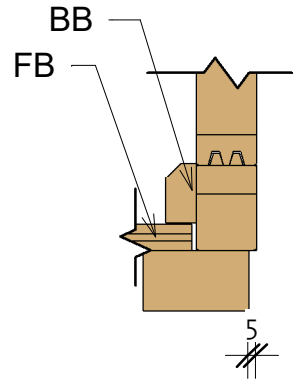① Baseboard




Floor Schedule

Mark	Type	Profile	Count	Length
FB	FB 17X114		51	2914
BB1	BB 20X40		4	2950
BB2	BB 20X40		2	5800

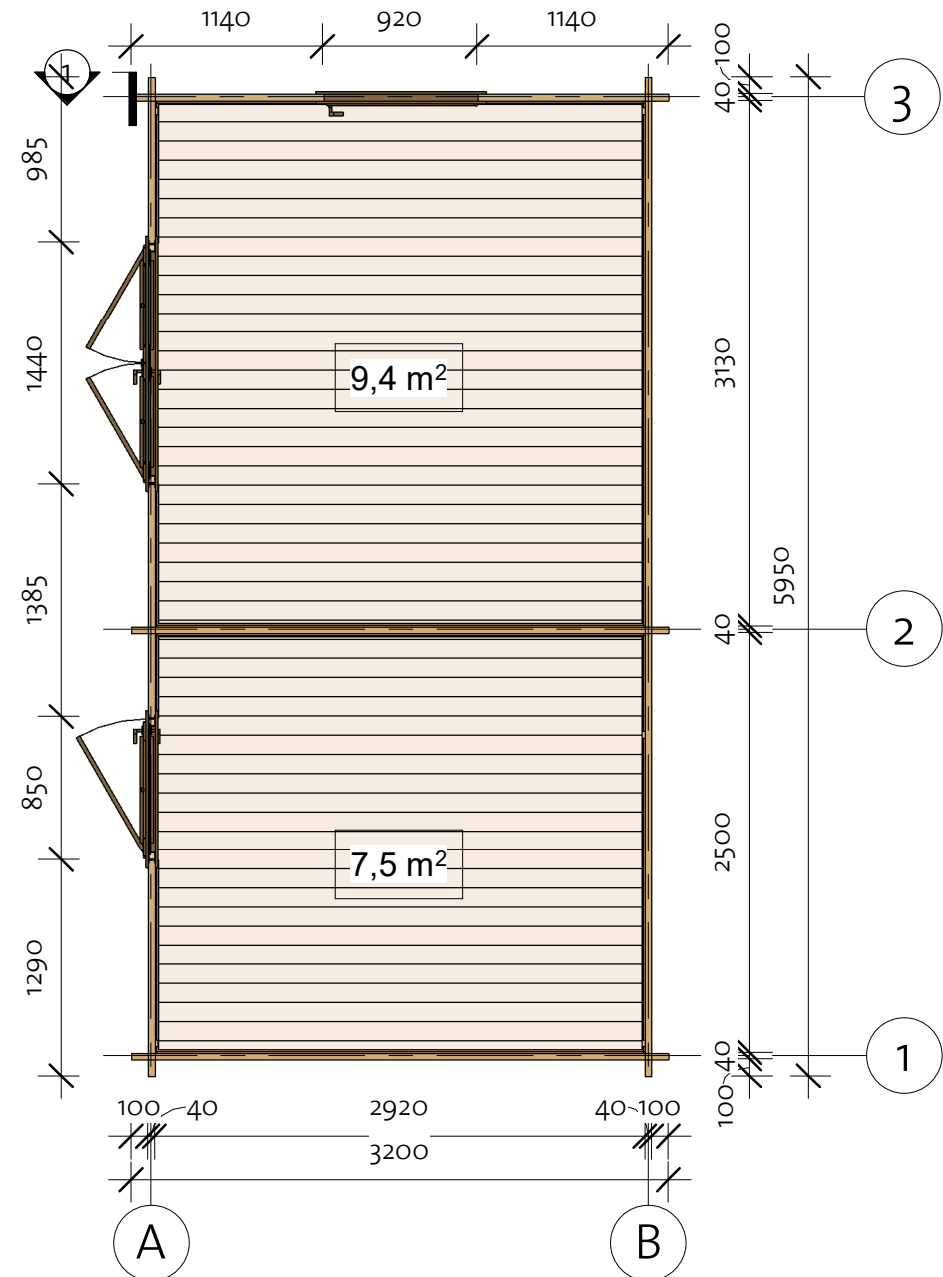

# Matzuga 40 (300x575)


Wall 1

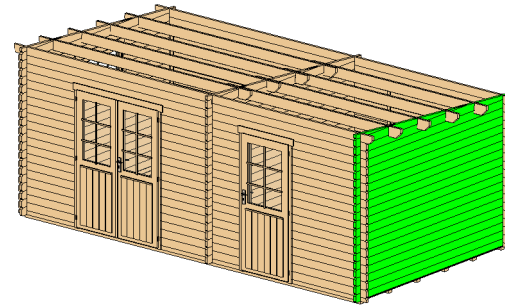

Wall 1			
Mark	Profile	Count	Cut Length

1LG-1*	40X114	1	840
1LG-2*	40X114	1	2320
1LG-3*	40X114	1	3200
1LG-4	40X114	17	3200
1LG-5*	40X114	1	3200

\* Gable - delivered premounted

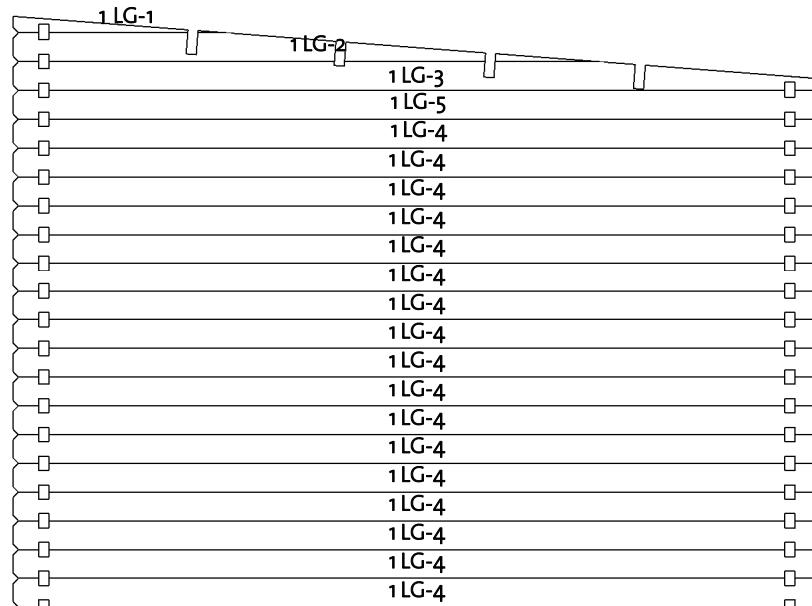


Log Profile Wall 1	
Profile	Profile

40X114	
--------	--

# Matzuga 40 (300x575)


Wall 2

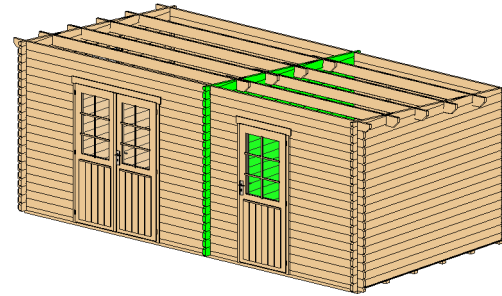

Wall 2			
Mark	Profile	Count	Cut Length

2LG-1*	40X114	1	840
2LG-2*	40X114	1	2320
2LG-3*	40X114	1	3200
2LG-4	40X114	17	3200
2LG-5*	40X114	1	3200

\* Gable - delivered premounted

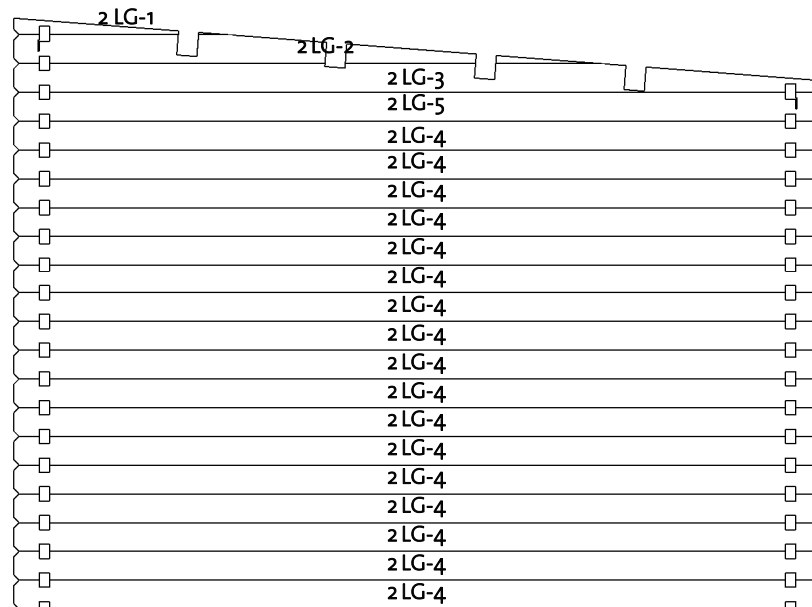


Log Profile Wall 2	
Profile	Profile

40X114	
--------	--

# Matzuga 40 (300x575)


Wall 3

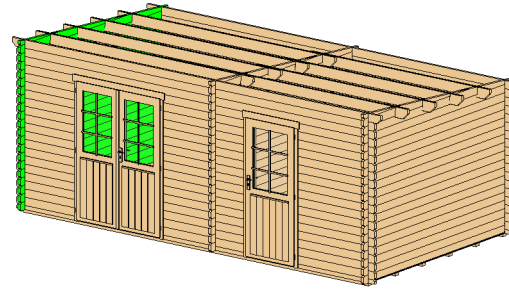


Wall 3			
Mark	Profile	Count	Cut Length

3LG-1*	40X114	1	840
3LG-2*	40X114	1	2320
3LG-3*	40X114	1	3200
3LG-4	40X114	13	3200
3LG-5*	40X114	1	3200
3LG-6	40X114	8	1140

\* Gable - delivered premounted

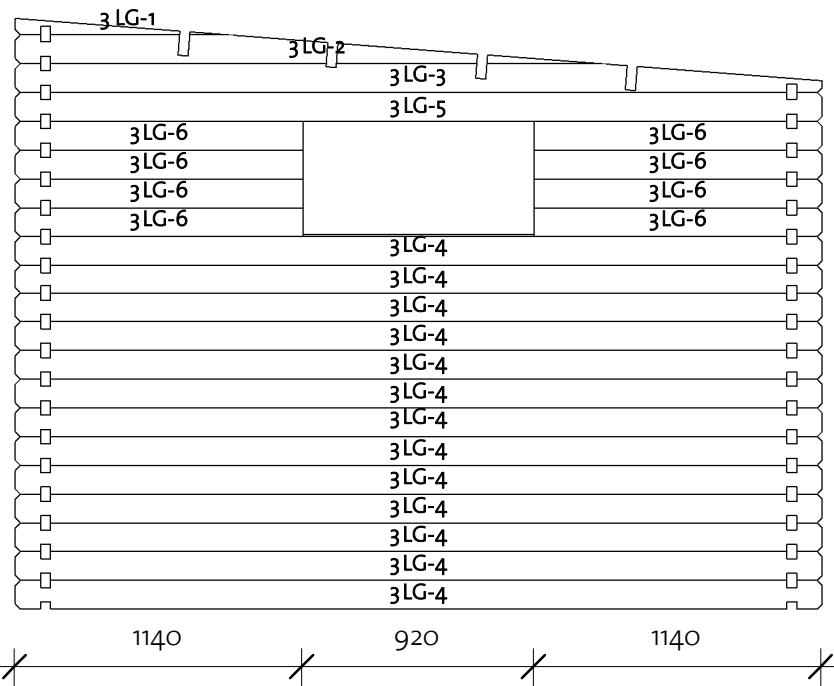


Log Profile Wall 3	
Profile	Profile

40X114	
--------	---


# Matzuga 40 (300x575)

Wall A

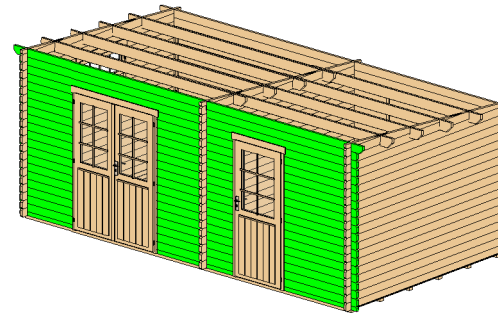

Wall A			
Mark	Profile	Count	Cut Length

ABL-1	40x57	1	1290
ABL-2	40x57	1	985
ABL-3	40x57	1	1385
ALG-1	40x114	17	1290
ALG-2	40x114	17	985
ALG-3	40x114	17	1385
ALG-4	40x114	1	5950
ALG-5	40x114	1	5950
ATL-1	40x114	1	3390
ATL-2	40x114	1	2760

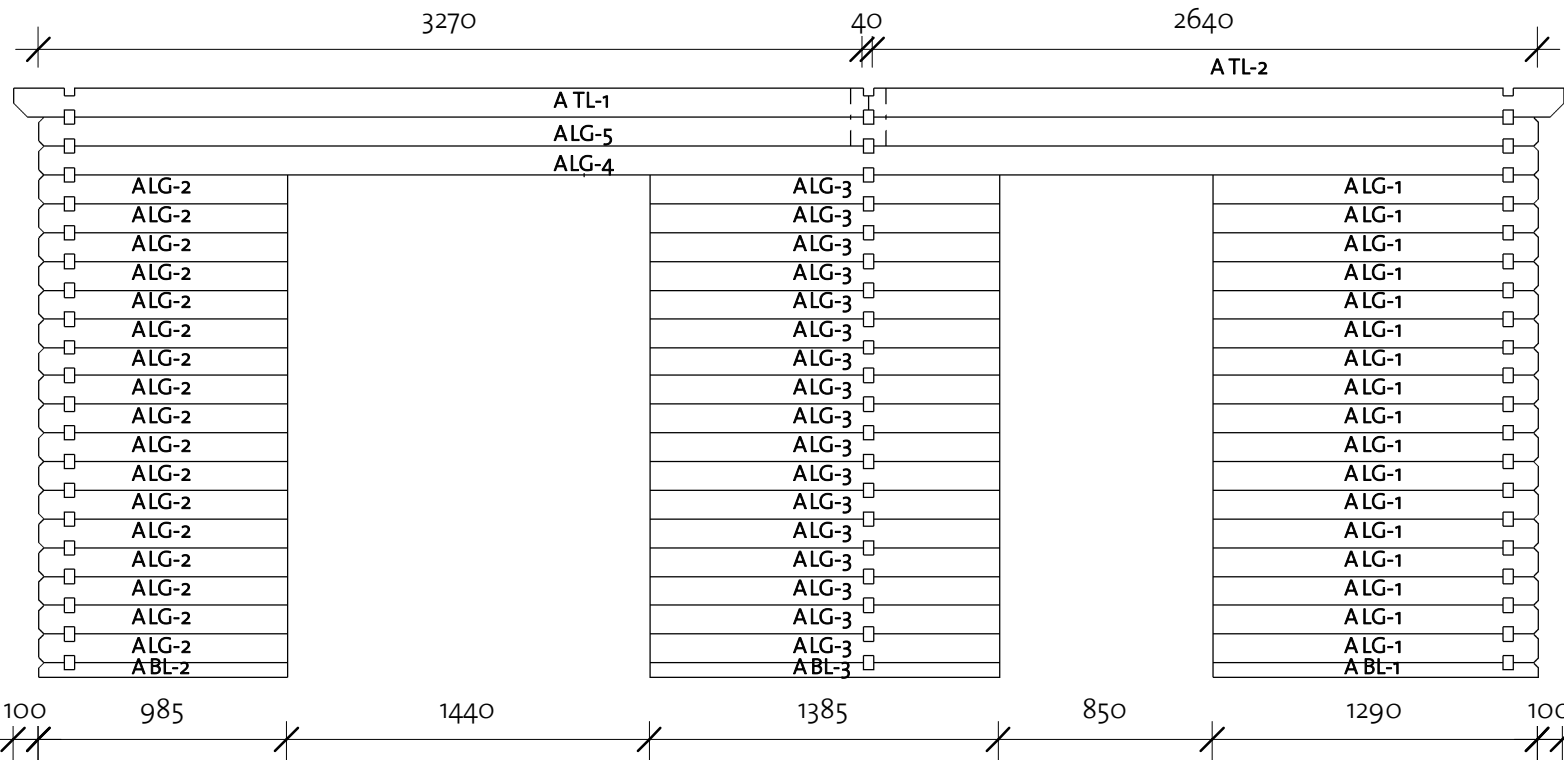


Log Profile Wall A	
Profile	Profile

40x57	
40x114	
40x114	


# Matzuga 40 (300x575)

Wall B

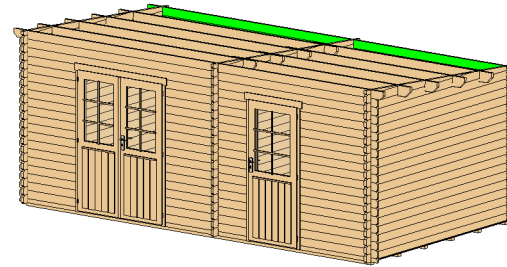

Wall B			
Mark	Profile	Count	Cut Length

BBL-1	40x57	1	5950
BLG-1	40x114	16	5950
BLG-2	40x114	1	5950
BTL-1	40x114	1	3390
BTL-2	40x114	1	2760

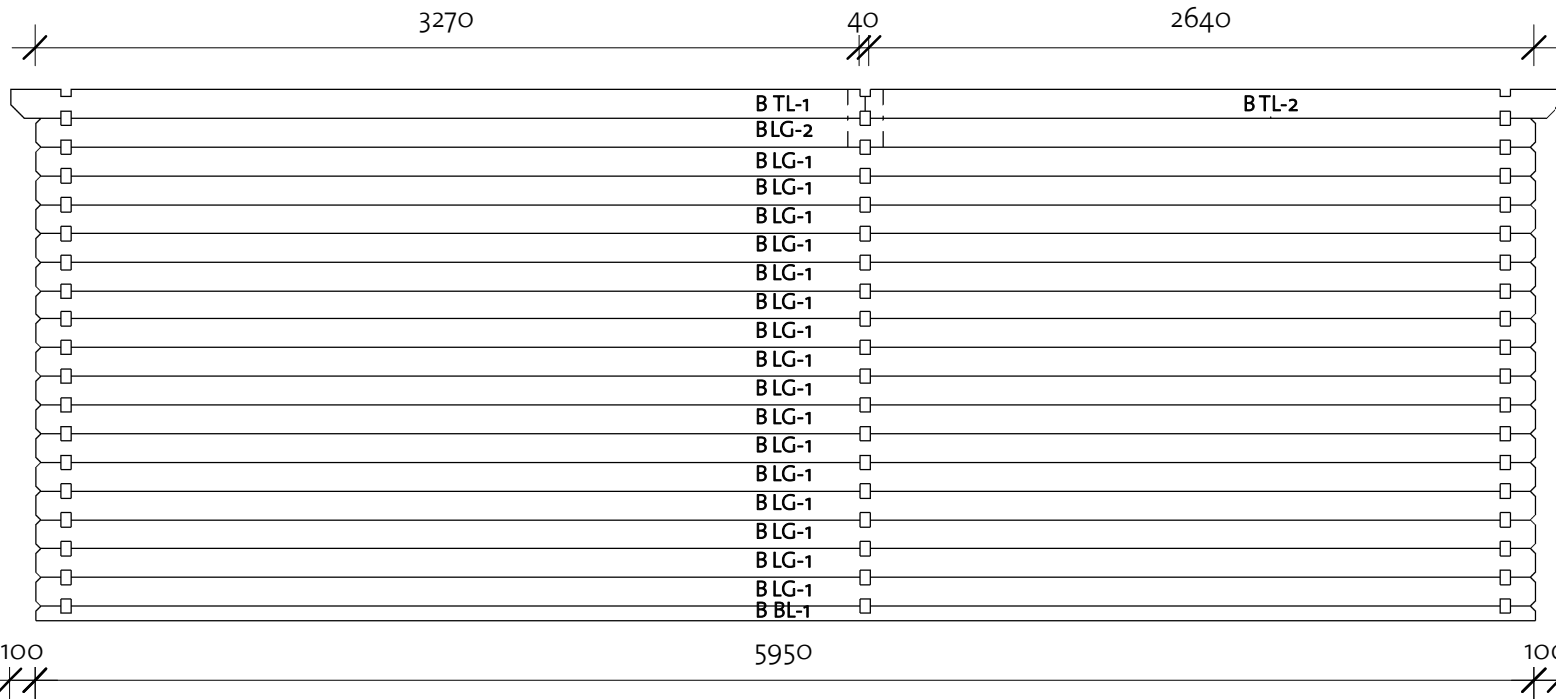


Log Profile Wall B	
Profile	Profile



40x57	
40x114	
40x114	



# Matzuga 40 (300x575)

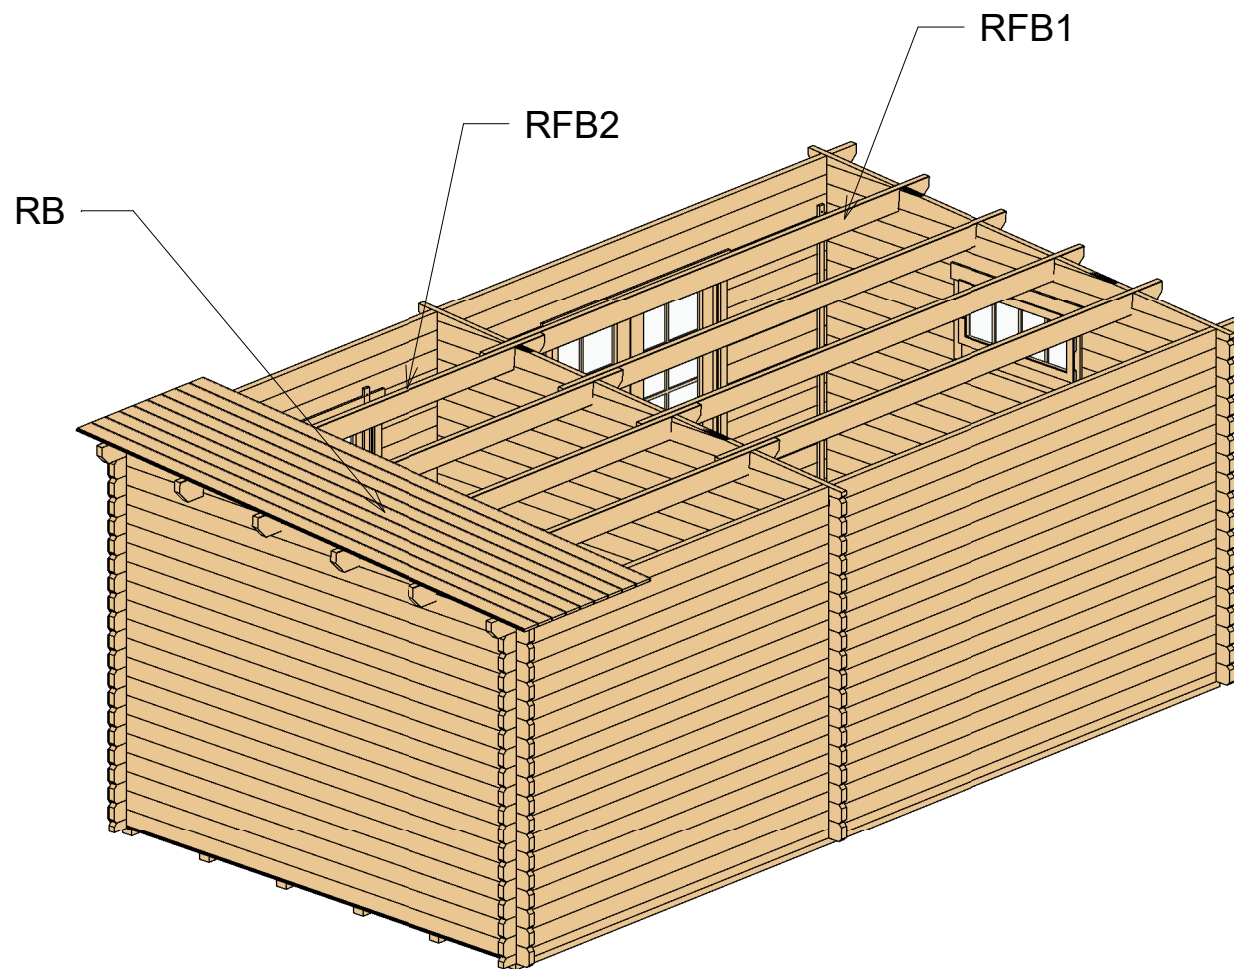
Roof 1





Roof				
Mark	Type	Profile	Count	Length
RB	17x114		55	3410
RFB1	Beam 40x143		4	3610
RFB2	Beam 40x143		4	2980

# Matzuga 40 (300x575)


Roof 2

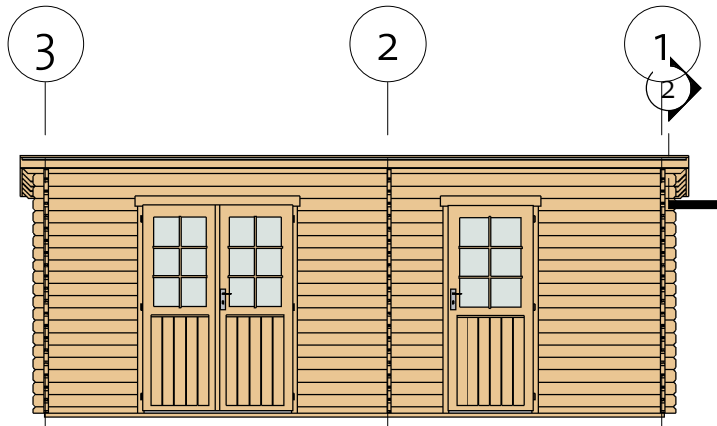

② Roof reinforcement 1

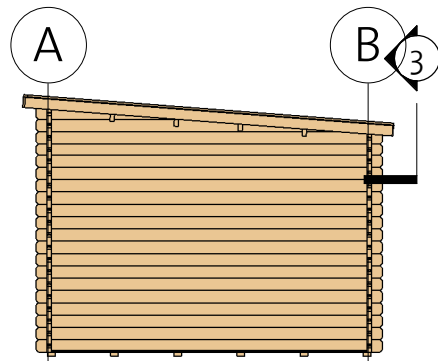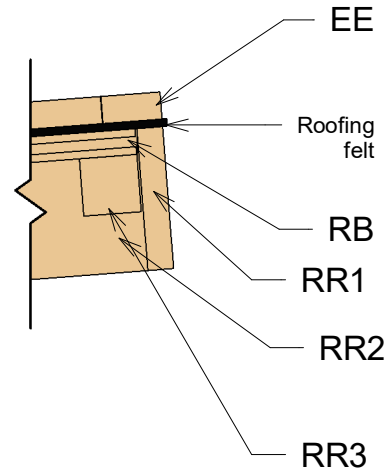

③ Roof Reinforcement 2

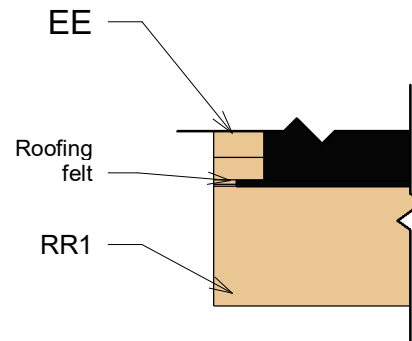


Fascia Schedule

Mark	Type	Profile	Count	Length
EE1	Eave Edging 18x40		2	3093
EE2	Eave Edging 18x40		2	3406
RR1	Roof reinforcement 18x120		4	3093
RR2	Roof reinforcement 18x120		2	3410
RR3	Roof reinforcement 38x38		4	3075

# Matzuga 40 (300x575)

Extras

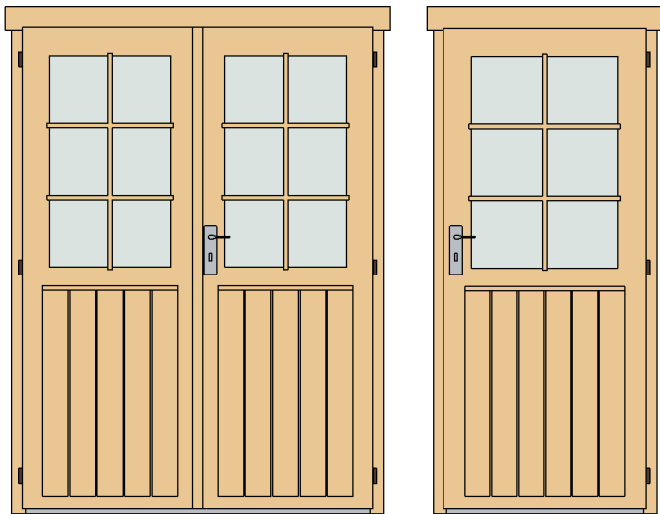

Door Schedule				
Model	Type	Width	Height	Count

CDD1R	Classic double door 1 right	1425	1955	1
CD4R	Classic door 4 right	840	1955	1

DCB6	Door Crossbar 6	--	--	3
------	--------------------	----	----	---

Window Schedule				
Mark	Type	Width	Height	Count

CW5R	Classic window 5 right	915	420	1
------	---------------------------	-----	-----	---


WCB6	Windows Crossbar 6	--	--	1
------	-----------------------	----	----	---

Type	Count	Length
Windboard 18x40	6	2200



Fasteners/Extras		
Name	Type	Count


Hitblock	300-400 mm	
Dowels	16 x 150	8
Bolts	M8x70	18
Screws	5,0 x 70	20
Nails	1,4 x 40	65
Screws	6,0 x 140	65
Screws	4,0 x 40	120
Screws	4,0 x 50	720





# Matzuga 40 (300x575)

## List of all items 1



### Impregnated foundation beams

Mark	Type	Profile	Count	Length
IFB	IFB 70x40		6	5740






### Roof

Mark	Type	Profile	Count	Length
RB	17x114		55	3410
RFB1	Beam 40x143		4	3610
RFB2	Beam 40x143		4	2980

### Floor Schedule

Mark	Type	Profile	Count	Length
FB	FB 17x114		51	2914
BB1	BB 20x40		4	2950
BB2	BB 20x40		2	5800

### Fascia Schedule

Mark	Type	Profile	Count	Length
EE1	Eave Edging 18x40		2	3093
EE2	Eave Edging 18x40		2	3406
RR1	Roof reinforce ment 18x120		4	3093
RR2	Roof reinforce ment 18x120		2	3410
RR3	Roof reinforce ment 38x38		4	3075

# Matzuga 40 (300x575)

## List of all items 2

Wall 1			
Mark	Profile	Count	Cut Length

1LG-1*	40X114	1	840
1LG-2*	40X114	1	2320
1LG-3*	40X114	1	3200
1LG-4	40X114	17	3200
1LG-5*	40X114	1	3200


Wall 2			
Mark	Profile	Count	Cut Length

2LG-1*	40X114	1	840
2LG-2*	40X114	1	2320
2LG-3*	40X114	1	3200
2LG-4	40X114	17	3200
2LG-5*	40X114	1	3200

Wall 3			
Mark	Profile	Count	Cut Length

3LG-1*	40X114	1	840
3LG-2*	40X114	1	2320
3LG-3*	40X114	1	3200
3LG-4	40X114	13	3200
3LG-5*	40X114	1	3200
3LG-6	40X114	8	1140

Log profiles	
Profile	Profile

40X57	
-------	---

Wall A			
Mark	Profile	Count	Cut Length


ABL-1	40X57	1	1290
ABL-2	40X57	1	985
ABL-3	40X57	1	1385
ALG-1	40X114	17	1290
ALG-2	40X114	17	985
ALG-3	40X114	17	1385
ALG-4	40X114	1	5950
ALG-5	40X114	1	5950
ATL-1	40X114	1	3390
ATL-2	40X114	1	2760

\* Gable - delivered premounted

Wall B			
Mark	Profile	Count	Cut Length

BBL-1	40X57	1	5950
BLG-1	40X114	16	5950
BLG-2	40X114	1	5950
BTL-1	40X114	1	3390
BTL-2	40X114	1	2760

Log profiles	
Profile	Profile

40X114	
40X114	