

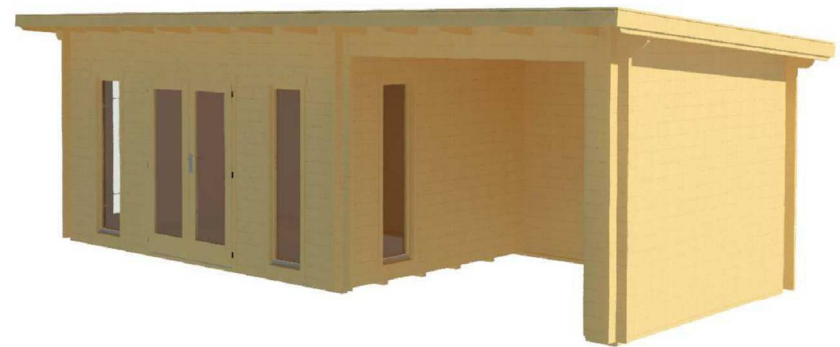
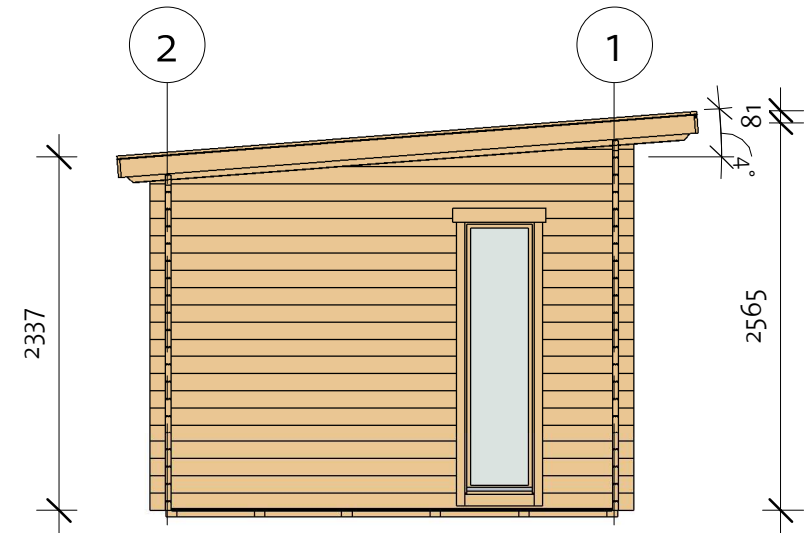


# Oklahoma 40 (450x300) + SD

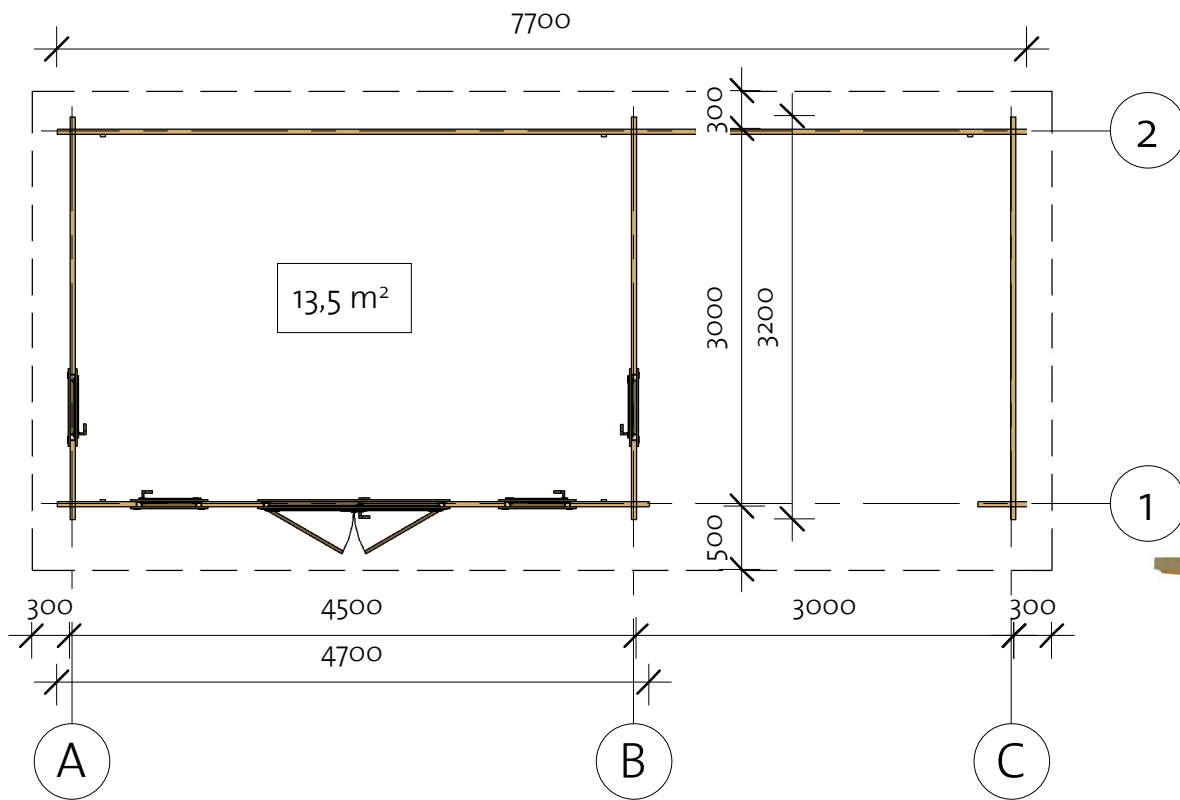


# Oklahoma 40 (450x300) + SD

Foundation

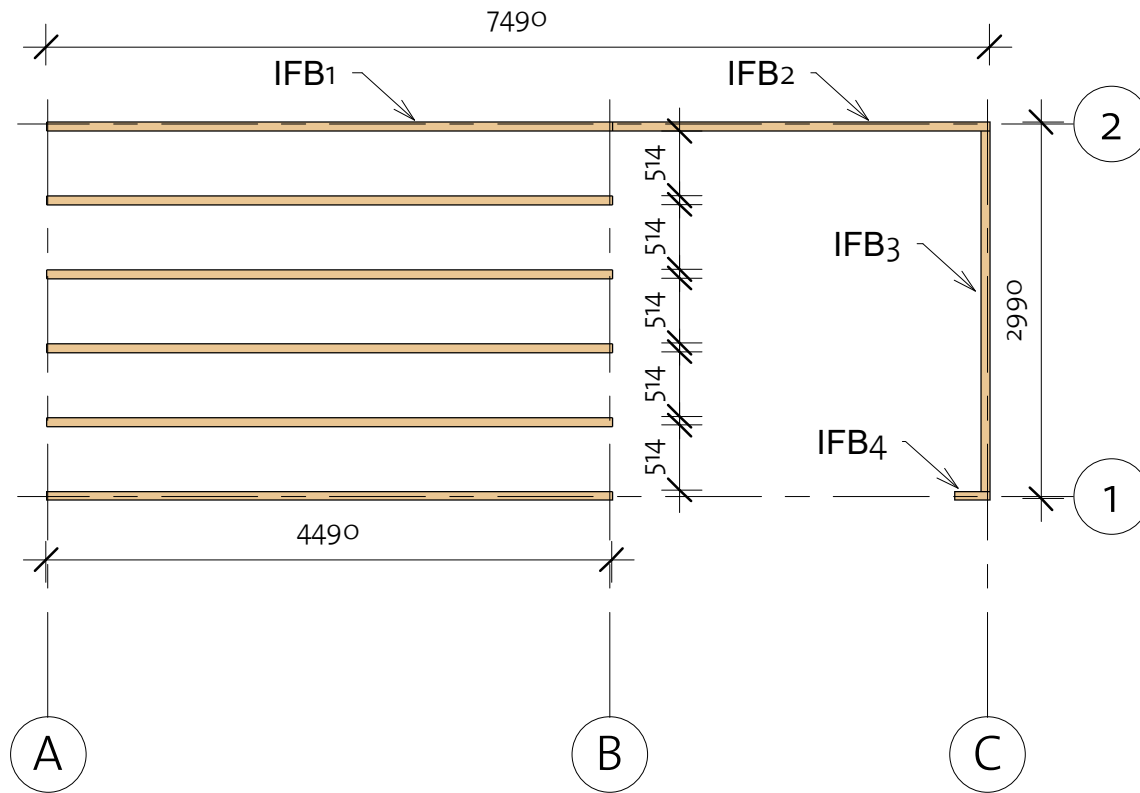

## Impregnated foundation beams



Mark	Type	Profile	Count	Length
------	------	---------	-------	--------

IFB1	IFB 70x40		6	4490
IFB2	IFB 70x40		1	3000
IFB3	IFB 70x40		1	2850
IFB4	IFB 70x40		1	280

# Oklahoma 40 (450x300) + SD


Floor Plan


① Baseboard

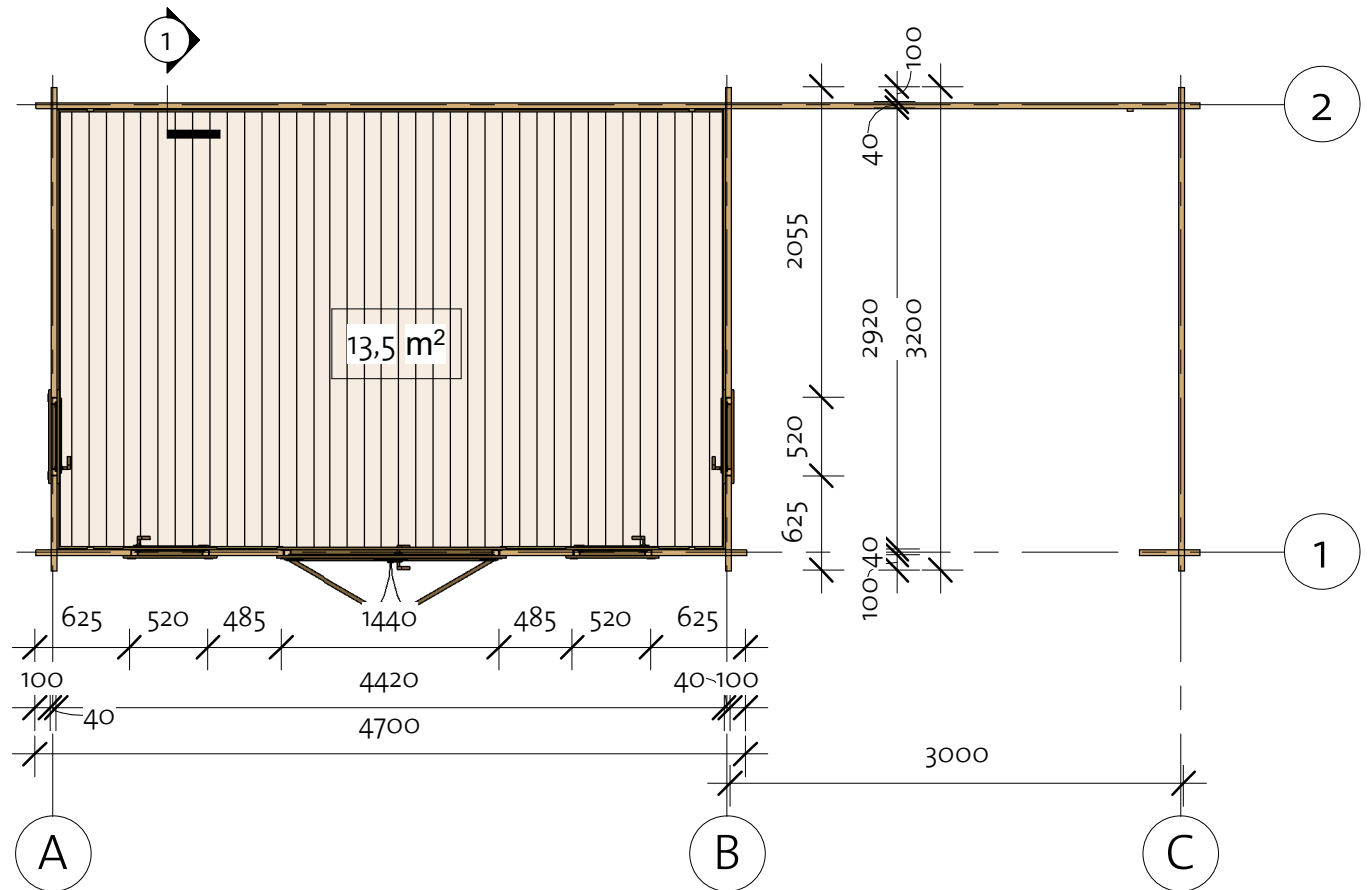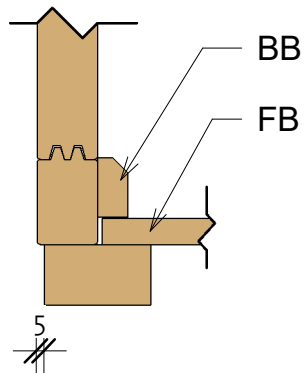

Floor Schedule



Mark	Type	Profile	Count	Length
------	------	---------	-------	--------



FB	FB 17x114		40	2914
----	-----------	---	----	------


BB1	BB 20x40		2	4500
BB2	BB 20x40		2	3000

# Oklahoma 40 (450x300) + SD

Wall 1


Log Profile Wall 1	
Profile	Profile
40X57	
40X114	

Log Profile Wall 1	
Profile	Profile
40X114	
40X114	

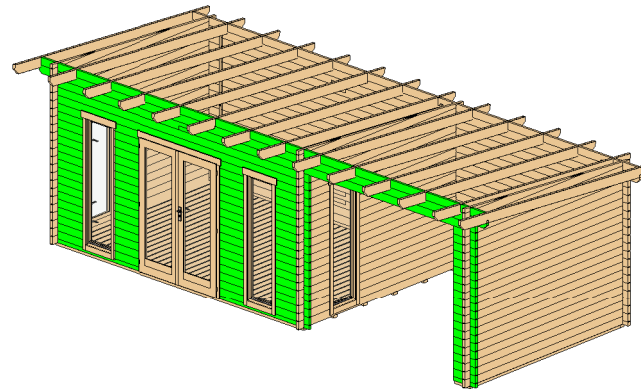

Wall 1			
Mark	Profile	Count	Cut Length


1BL-1	40X57	2	1630
1BL-2	40X57	1	400
1LG-1	40X114	34	485
1LG-2	40X114	34	625
1LG-3	40X114	1	2600
1LG-4	40X114	1	4780
1LG-5	40X114	1	3320
1LG-6	40X114	1	5350
1LG-7	40X114	19	400
1LG-8	40X114	1	4700
1LG-9	40X114	1	4700
1TL-1	40X114	2	593
1TL-1e	40X114	2	593
1TL-2	40X114	10	593
1TL-2e	40X114	10	593
1TL-3	40X114	1	428
1TL-3e	40X114	1	428

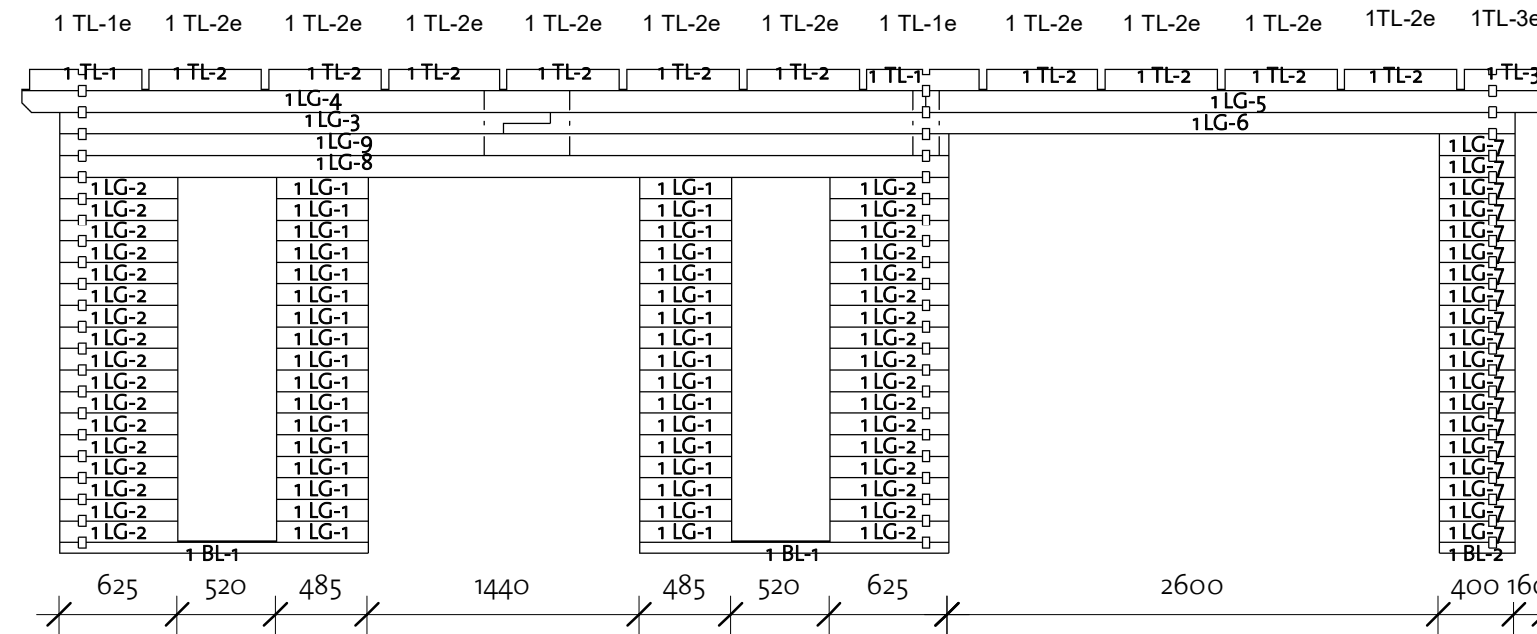

9221121\_210104

# Oklahoma 40 (450x300) + SD


Wall 2

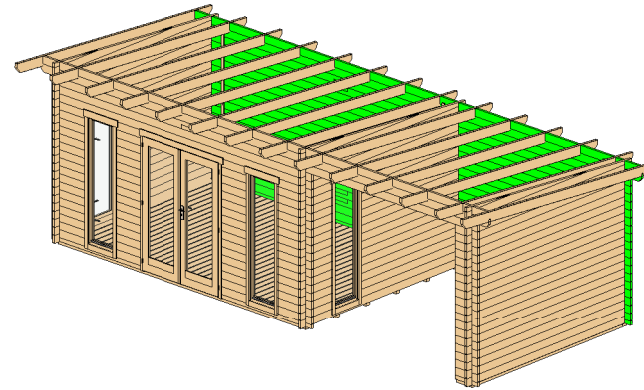

Wall 2			
Mark	Profile	Count	Cut Length

2BL-1	40X57	1	4580
2BL-2	40X57	1	3120
2LG-1	40X114	6	5350
2LG-2	40X114	1	4780
2LG-3	40X114	1	3320
2LG-4	40X114	6	2600
2LG-5	40X114	5	4580
2LG-6	40X114	7	4580
2LG-7	40X114	12	3120
2TL-1	40X114	2	593
2TL-1e	40X114	2	593
2TL-2	40X114	10	593
2TL-2e	40X114	10	593
2TL-3	40X114	1	428
2TL-3e	40X114	1	428

Log Profile Wall 2		Log Profile Wall 2	
Profile	Profile	Profile	Profile
40X57		40X114	
40X114		40X114	

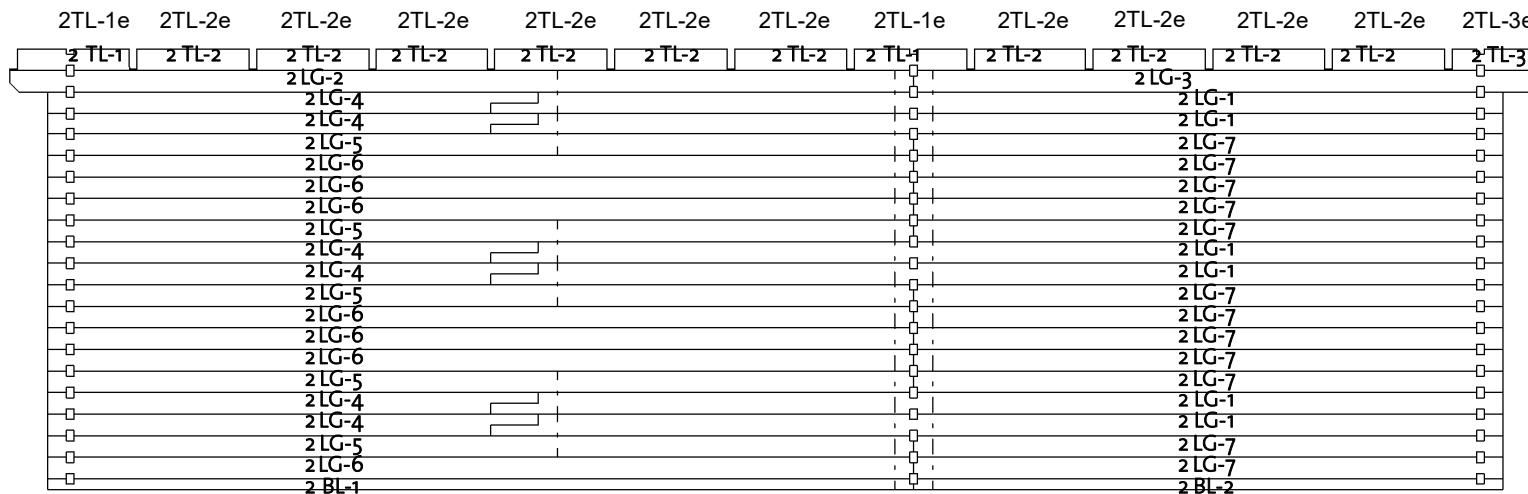

200

7700


200

9221121\_210104



# Oklahoma 40 (450x300) + SD


Wall B

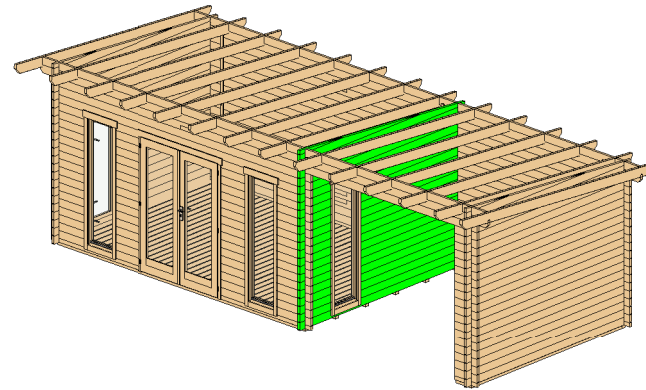

Wall B			
Mark	Profile	Count	Cut Length

BLG-1	40X114	16	625
BLG-2*	40X114	1	840
BLG-3	40X114	16	2055
BLG-4*	40X114	1	2320
BLG-5	40X114	1	3200
BLG-6	40X114	2	3200
BLG-7	40X114	1	3200
BLG-8*	40X114	1	3200

\* Gable - delivered premounted

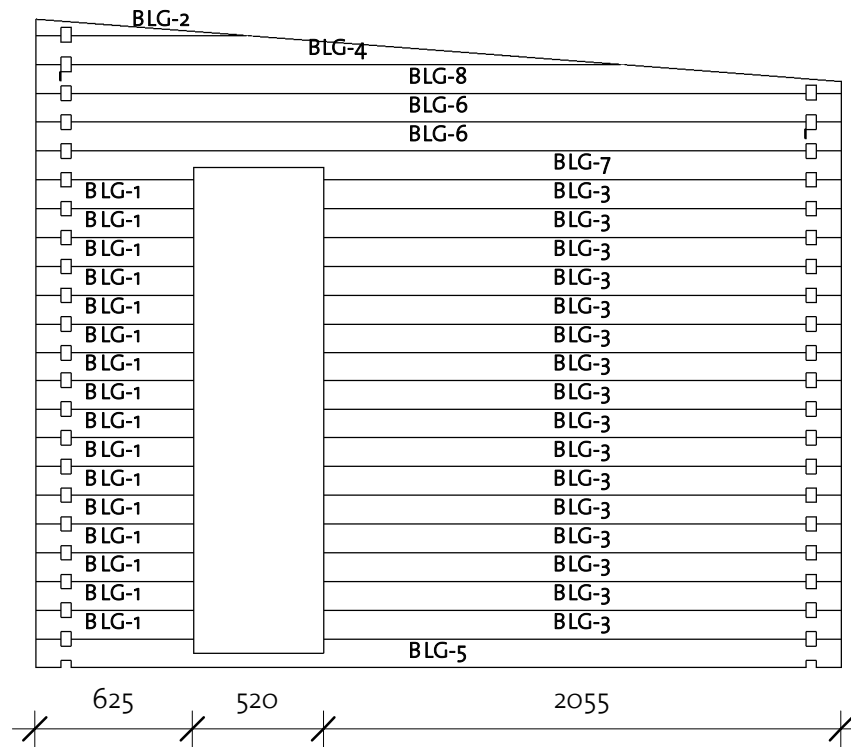


Log Profile Wall B	
Profile	Profile

40X114	
--------	--

# Oklahoma 40 (450x300) + SD


Wall C

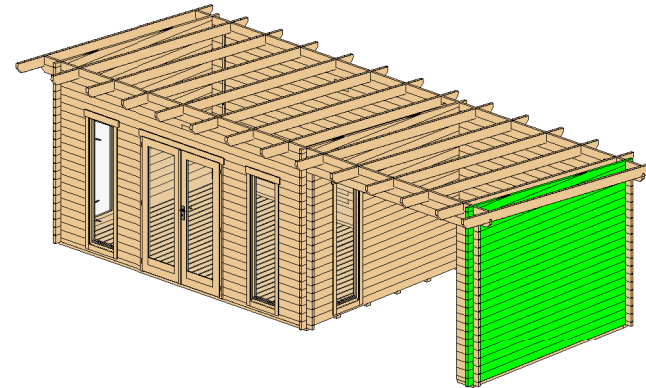

Wall C			
Mark	Profile	Count	Cut Length

CLG-1	40X114	20	3200
CLG-2 *	40X114	1	840
CLG-3 *	40X114	1	3200
CLG-4 *	40X114	1	2320

\* Gable - delivered premounted

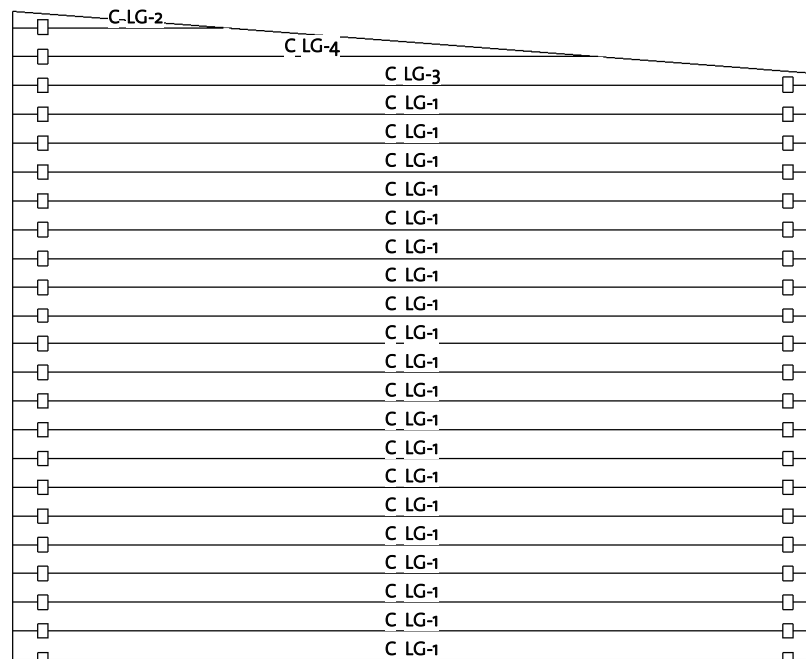


Log Profile Wall C	
Profile	Profile




40X114	
--------	--



# Oklahoma 40 (450x300) + SD




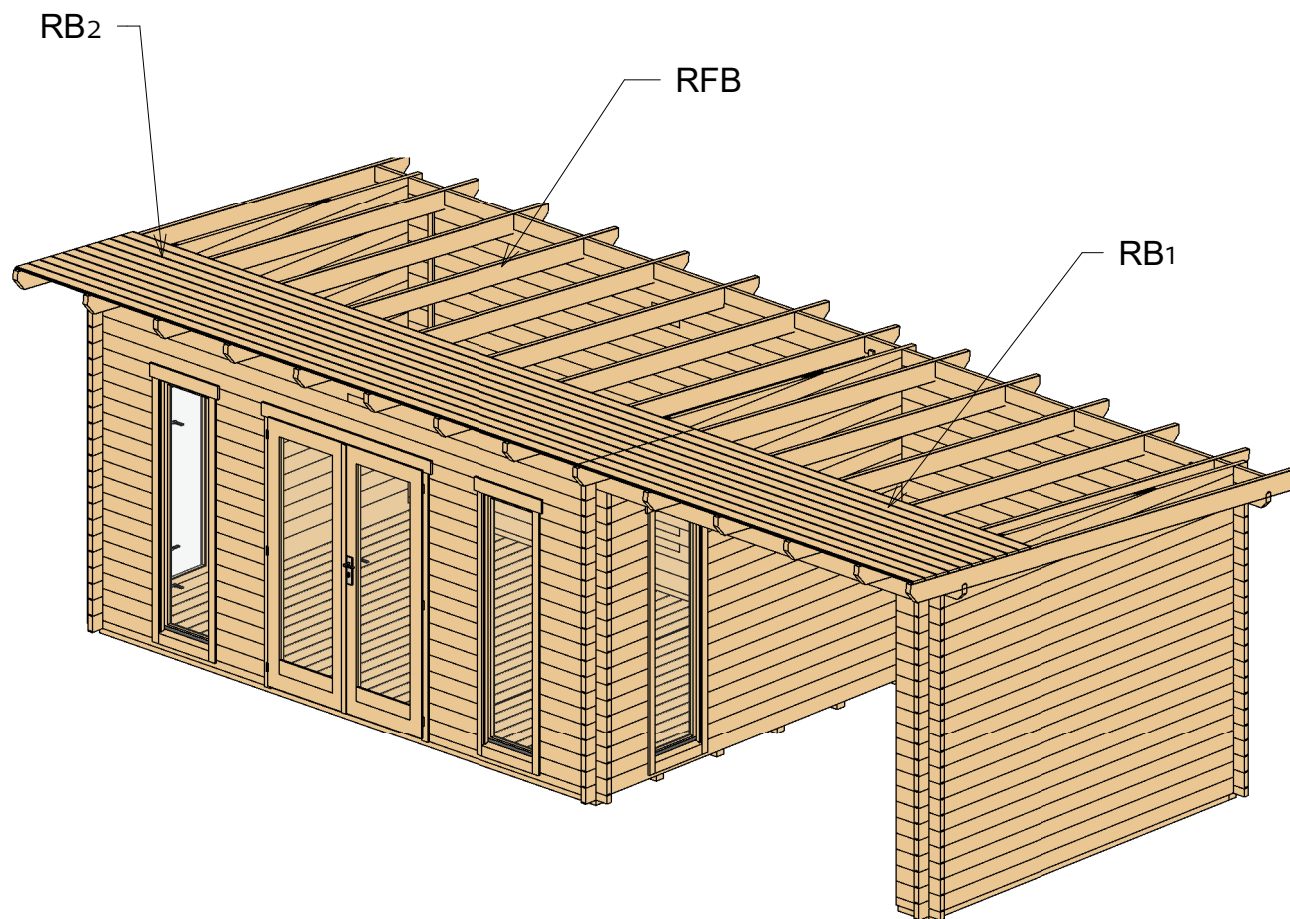
Roof 1



Roof				
Mark	Type	Profile	Count	Length
RB1	17x114		34	3020
RB2	17x114		34	5080
RFB	Beam 40x143		14	3810

# Oklahoma 40 (450x300) + SD


Roof 2

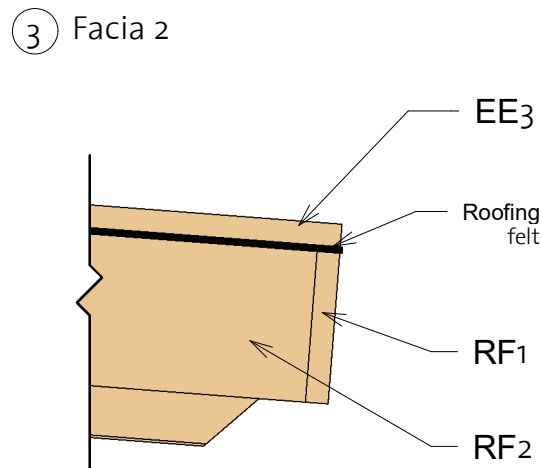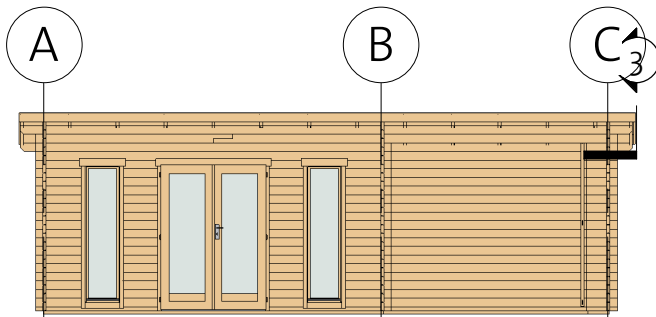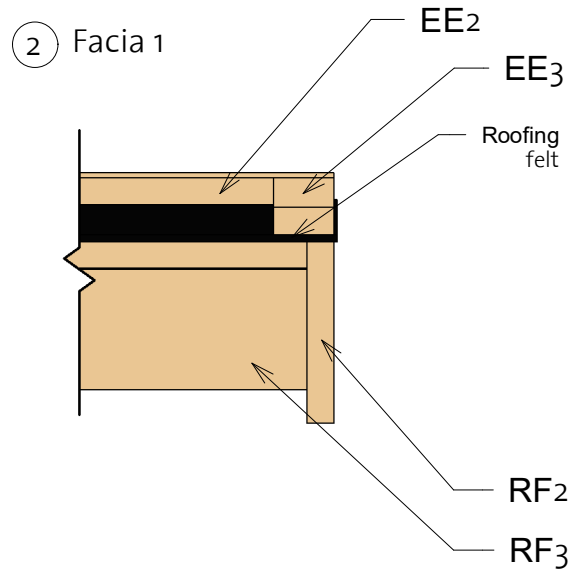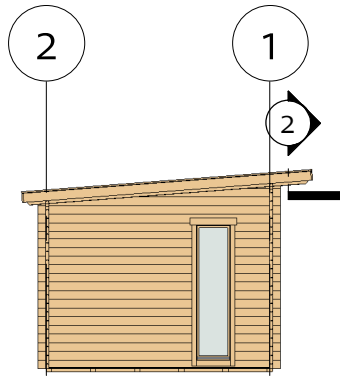

Fascia Schedule				
Type	Mark	Profile	Count	Length
Eave Edging 18x40	EE1		1	3056
Eave Edging 18x40	EE2		1	5098
Eave Edging 18x40	EE3		2	3806
Roof Fascia 18x120	RF1		2	3056
Roof Fascia 18x120	RF2		2	3810
Roof Fascia 18x120	RF3		2	5098

# Oklahoma 40 (450x300) + SD

Extras

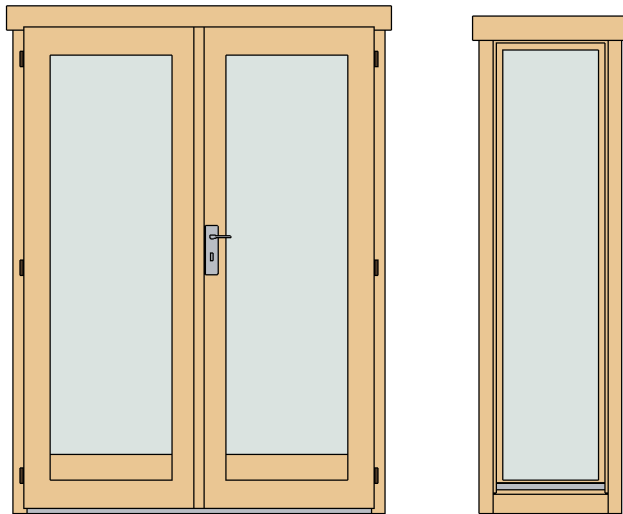

Door Schedule				
Model	Type	Width	Height	Count

CDD3R	Classic double door 3, full glass right	1425	1955	1
-------	---	------	------	---

Window Schedule				
Model	Type	Width	Height	Count

CW21R	Classic window 21 right	515	1890	4
-------	-------------------------	-----	------	---


- \* Windows intended for tilt opening only!
- \* Fenster zur Eröffnung nur zum Kippen vorgesehen!
- \* Aknad on ette nähtud ainult kaldu avamiseks!

Fasteners/Extras		
Name	Type	Count

Hitblock	300-400 mm	
Bolts	M8x70	15
Screws	5,0 x 70	25
Nails	1,4 x 40	35
Dowels	16,0 x 150	60
Screws	6,0 x 140	130
Screws	4,0 x 40	890

Type	Count	Length
------	-------	--------


Windboard 18x40x2200	3	2200
Windboard 18x40x2450	2	2450






# Oklahoma 40 (450x300) + SD

## List of all items 1


### Impregnated foundation beams


Mark	Type	Profile	Count	Length
IFB1	IFB 70x40		6	4490
IFB2	IFB 70x40		1	3000
IFB3	IFB 70x40		1	2850
IFB4	IFB 70x40		1	280

### Roof







Mark	Type	Profile	Count	Length
RB1	17x114		34	3020
RB2	17x114		34	5080
RFB	Beam 40x143		14	3810

### Floor Schedule

Mark	Type	Profile	Count	Length
FB	FB 17x114		40	2914

BB1	BB 20x40		2	4500
BB2	BB 20x40		2	3000

### Fascia Schedule

Type	Mark	Profile	Count	Length
Eave Edging 18x40	EE1		1	3056
Eave Edging 18x40	EE2		1	5098
Eave Edging 18x40	EE3		2	3806
Roof Fascia 18x120	RF1		2	3056
Roof Fascia 18x120	RF2		2	3810
Roof Fascia 18x120	RF3		2	5098

# Oklahoma 40 (450x300) + SD

## List of all items 2

Wall 1			
Mark	Profile	Count	Cut Length

1BL-1	40X57	2	1630
1BL-2	40X57	1	400
1LG-1	40X114	34	485
1LG-2	40X114	34	625
1LG-3	40X114	1	2600
1LG-4	40X114	1	4780
1LG-5	40X114	1	3320
1LG-6	40X114	1	5350
1LG-7	40X114	19	400
1LG-8	40X114	1	4700
1LG-9	40X114	1	4700
1TL-1	40X114	2	593
1TL-1e	40X114	2	593
1TL-2	40X114	10	593
1TL-2e	40X114	10	593
1TL-3	40X114	1	428
1TL-3e	40X114	1	428

Wall 2			
Mark	Profile	Count	Cut Length

2BL-1	40X57	1	4580
2BL-2	40X57	1	3120
2LG-1	40X114	6	5350
2LG-2	40X114	1	4780
2LG-3	40X114	1	3320
2LG-4	40X114	6	2600
2LG-5	40X114	5	4580
2LG-6	40X114	7	4580
2LG-7	40X114	12	3120
2TL-1	40X114	2	593
2TL-1e	40X114	2	593
2TL-2	40X114	10	593
2TL-2e	40X114	10	593
2TL-3	40X114	1	428
2TL-3e	40X114	1	428

# Oklahoma 40 (450x300) + SD

## List of all items 3

Wall A			
Mark	Profile	Count	Cut Length

ALG-1	40X114	16	625
ALG-2*	40X114	1	840
ALG-3	40X114	16	2055
ALG-4*	40X114	1	2320
ALG-5	40X114	1	3200
ALG-6	40X114	2	3200
ALG-7	40X114	1	3200
ALG-8*	40X114	1	3200

Wall B			
Mark	Profile	Count	Cut Length


BLG-1	40X114	16	625
BLG-2*	40X114	1	840
BLG-3	40X114	16	2055
BLG-4*	40X114	1	2320
BLG-5	40X114	1	3200
BLG-6	40X114	2	3200
BLG-7	40X114	1	3200
BLG-8*	40X114	1	3200

Wall C			
Mark	Profile	Count	Cut Length



CLG-1	40X114	20	3200
CLG-2*	40X114	1	840
CLG-3*	40X114	1	3200
CLG-4*	40X114	1	2320

\* Gable - delivered premounted

Log profiles	
Profile	Profile

40X57	
-------	---

Log profiles	
Profile	Profile


40X114	
40X114	

# Windboard




① Windboard Assembly 1



② Windboard Assembly 2

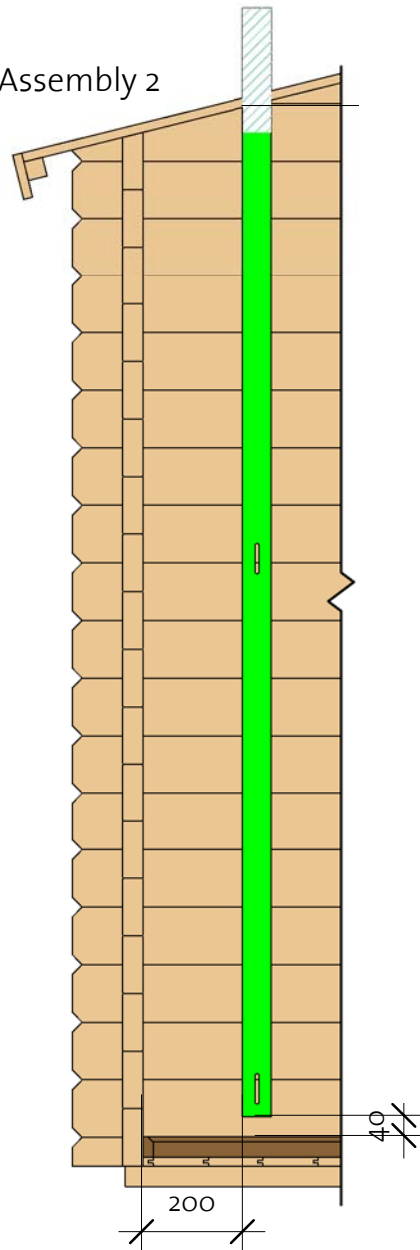

③ Windboard Assembly 3

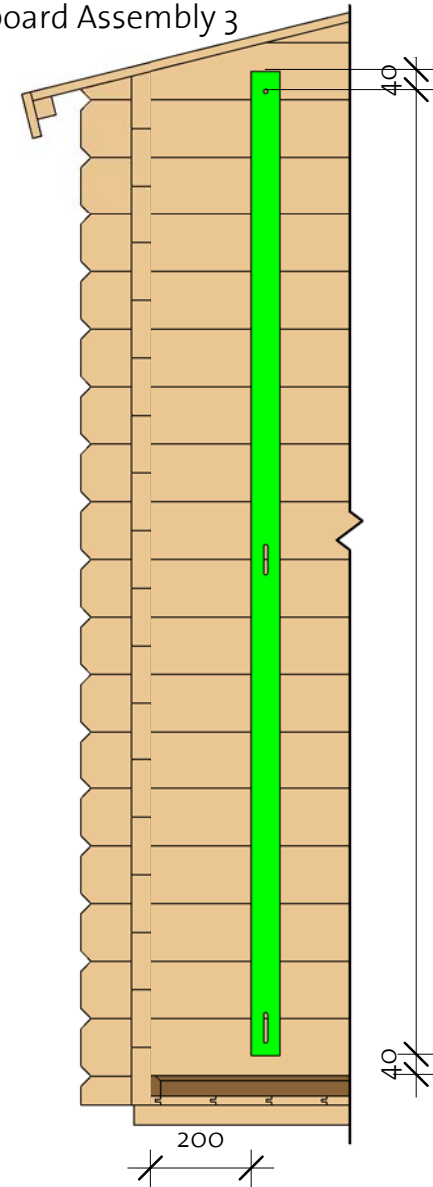

Ø 8mm