

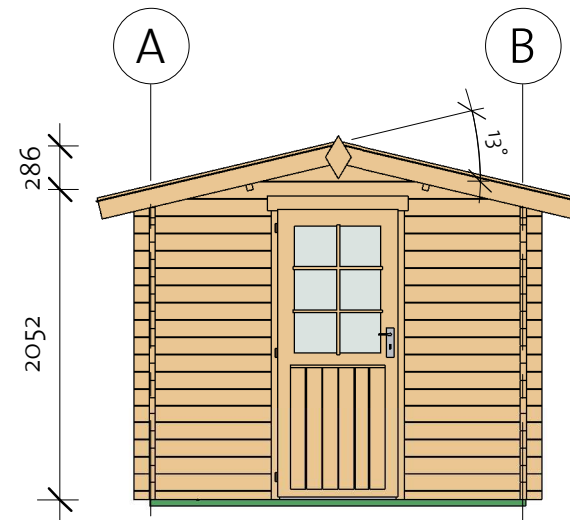


Vello 3 40 (250x300)

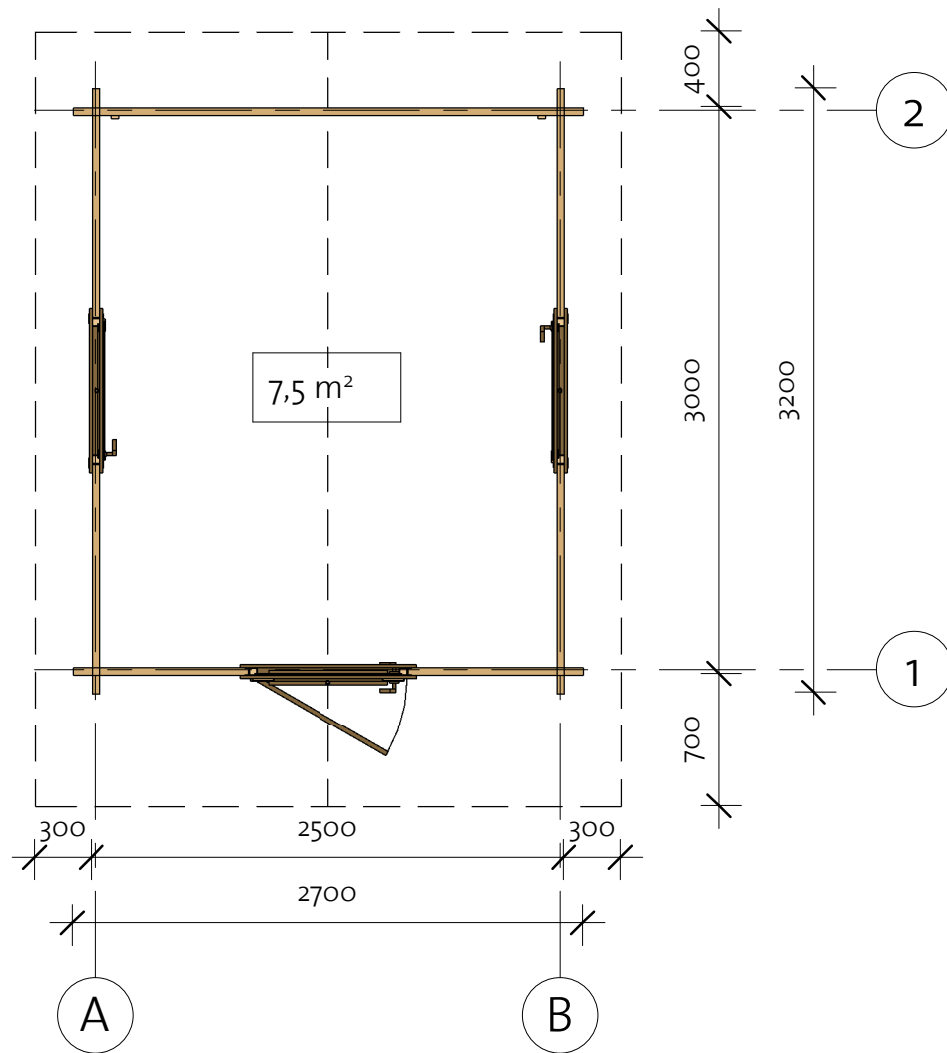

Vello 3 40 (250x300)

Foundation

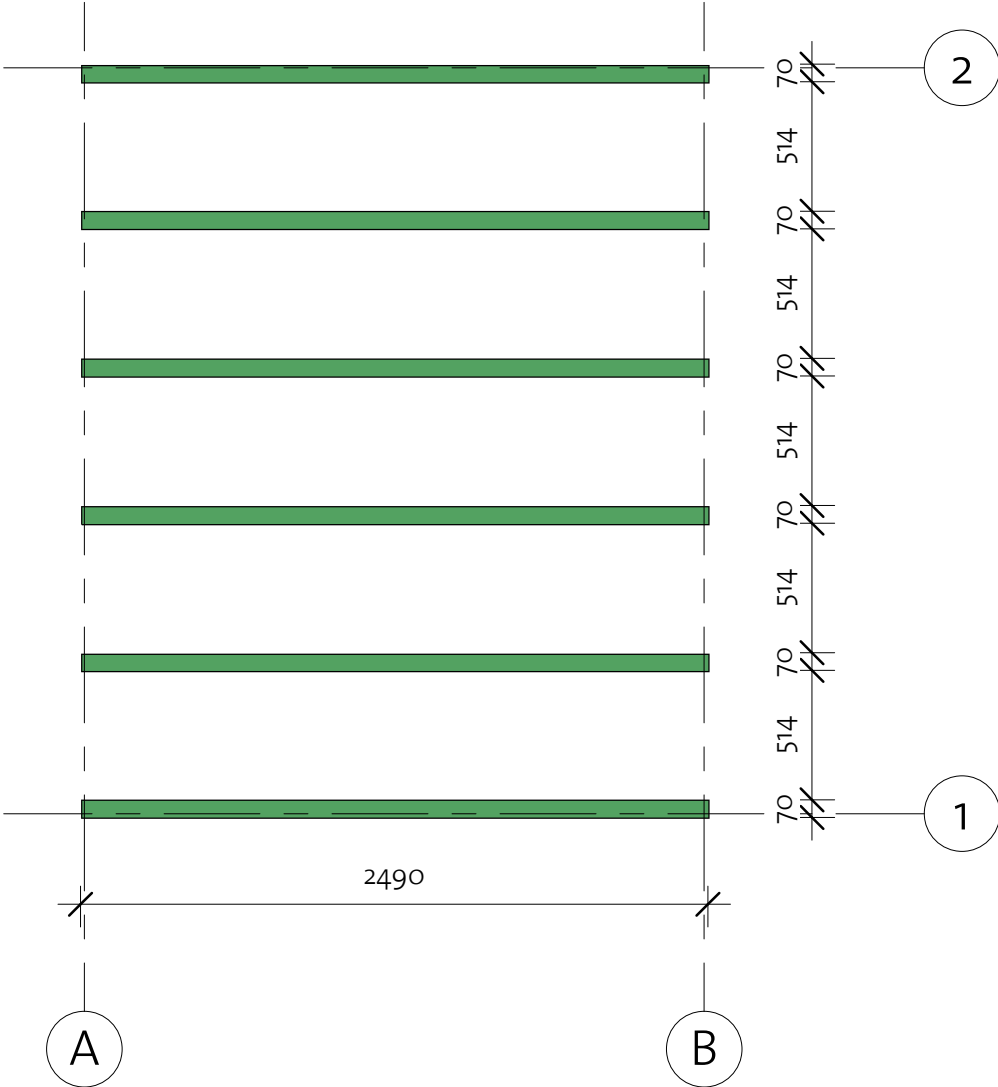


Impregnated foundation beams				
Mark	Type	Profile	Count	Length
IFB	IFB 70x40		6	2490


Vello 3 40 (250x300)

Floor Plan


① Baseboard



Floor Schedule				
Mark	Type	Profile	Count	Length
FB	FB 17x114		22	2914
BB1	BB 20x40		2	3000
BB2	BB 20x40		2	2500

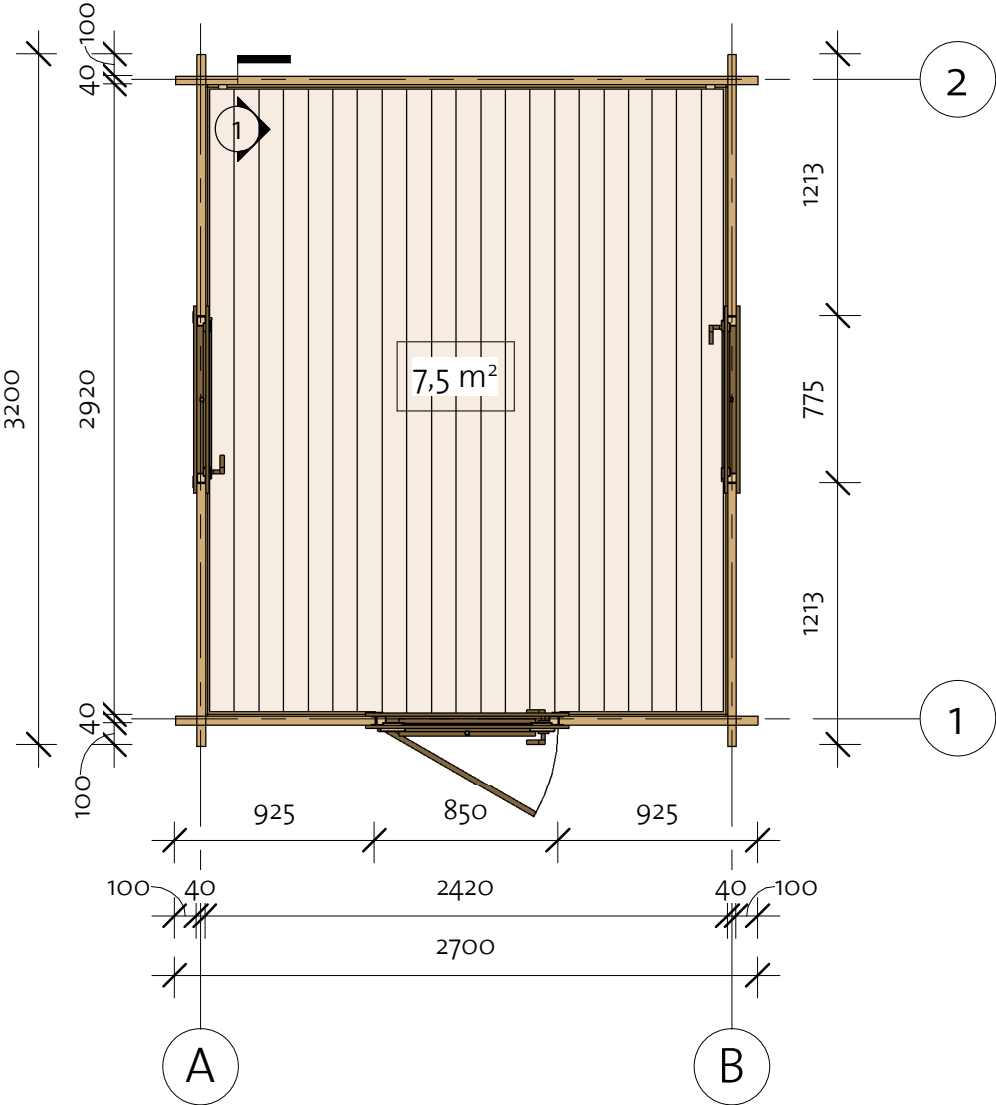


Wall 1

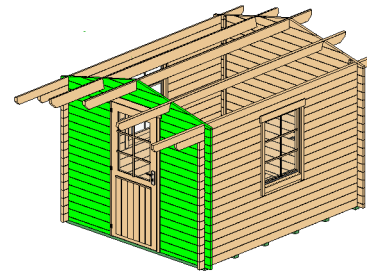

Wall 1			
Mark	Profile	Count	Cut Length

1BL-1	40x57	2	925
1LG-1	40x114	34	925
1LG-2*	40x114	1	974
1LG-3*	40x114	1	1938
1LG-4*	40x114	1	2700

*Gable-delivered premounted


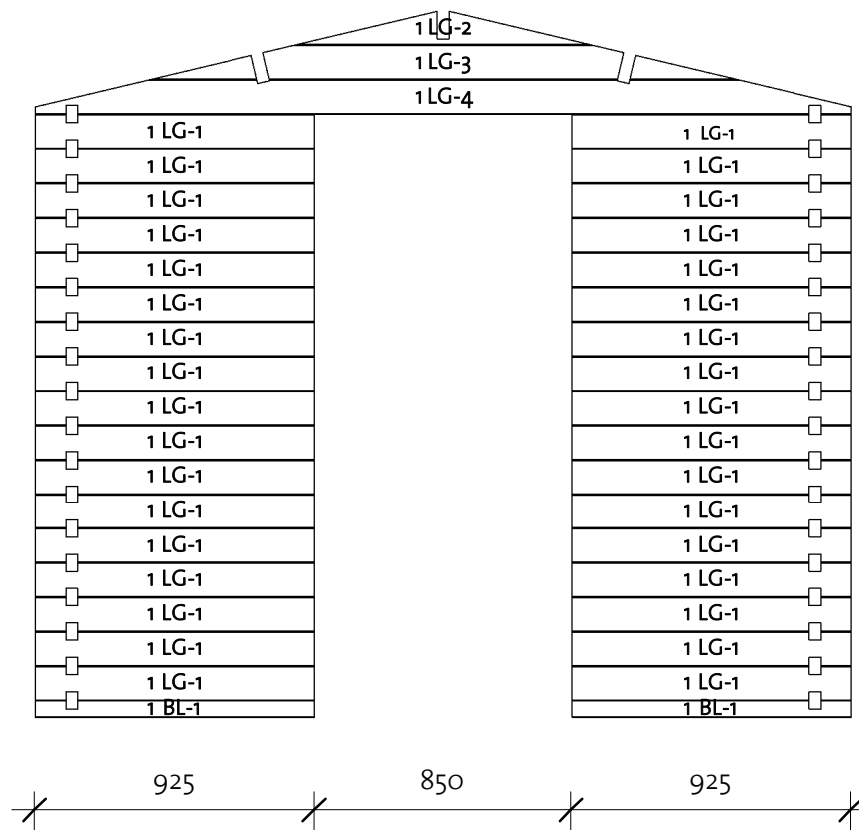


Log Profile Wall 1	
Profile	Profile

40x57	
40x114	

Vello 3 40 (250x300)

Wall 2

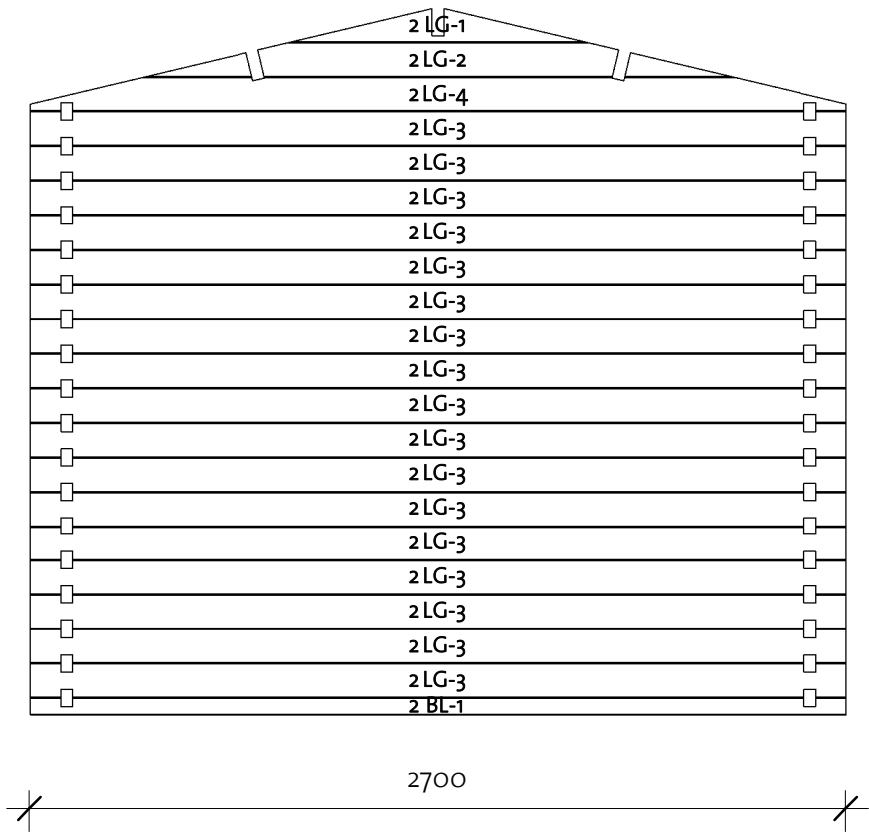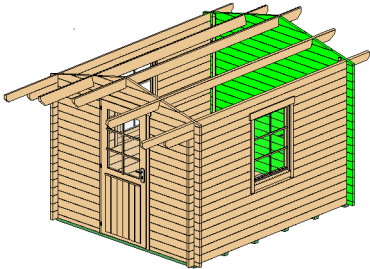

Wall 2			
Mark	Profile	Count	Cut Length

2BL-1	40x57	1	2700
2LG-1 *	40x114	1	974
2LG-2 *	40x114	1	1938
2LG-3	40x114	17	2700
2LG-4 *	40x114	1	2700


*Gable-delivered premounted

Log Profile Wall 2	
Profile	Profile

40x57	
40x114	



Vello 3 40 (250x300)

Wall A

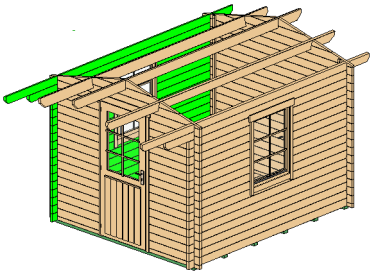

Wall A			
Mark	Profile	Count	Cut Length

ALG-1	40x114	18	1213
ALG-2	40x114	7	3200
ALG-3	40x114	1	3650
ATL-1	40x114	1	4400

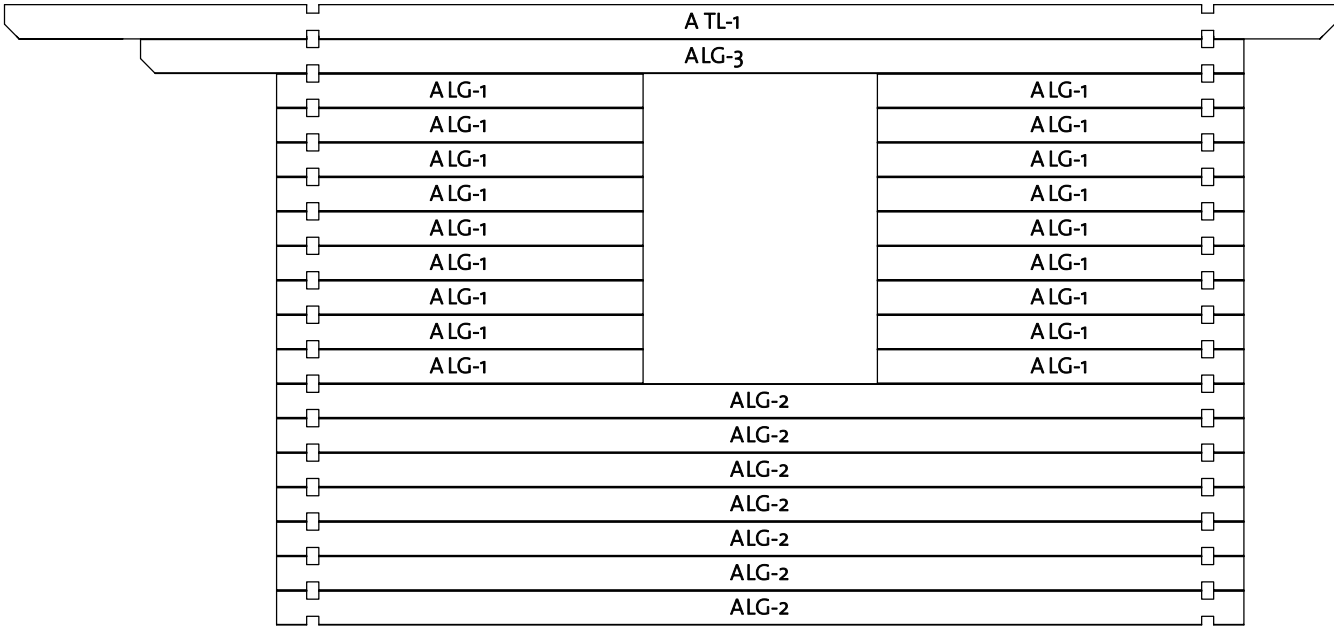


Log Profile Wall A	
Profile	Profile

40x114	
40x114	



Vello 3 40 (250x300)

Wall B

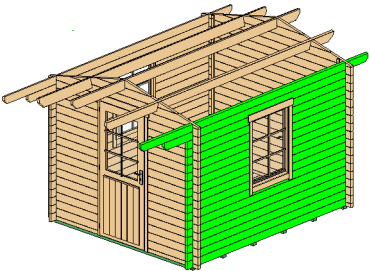

Wall B			
Mark	Profile	Count	Cut Length

BLG-1	40x114	18	1213
BLG-2	40x114	7	3200
BLG-3	40x114	1	3650
BTl-1	40x114	1	4400

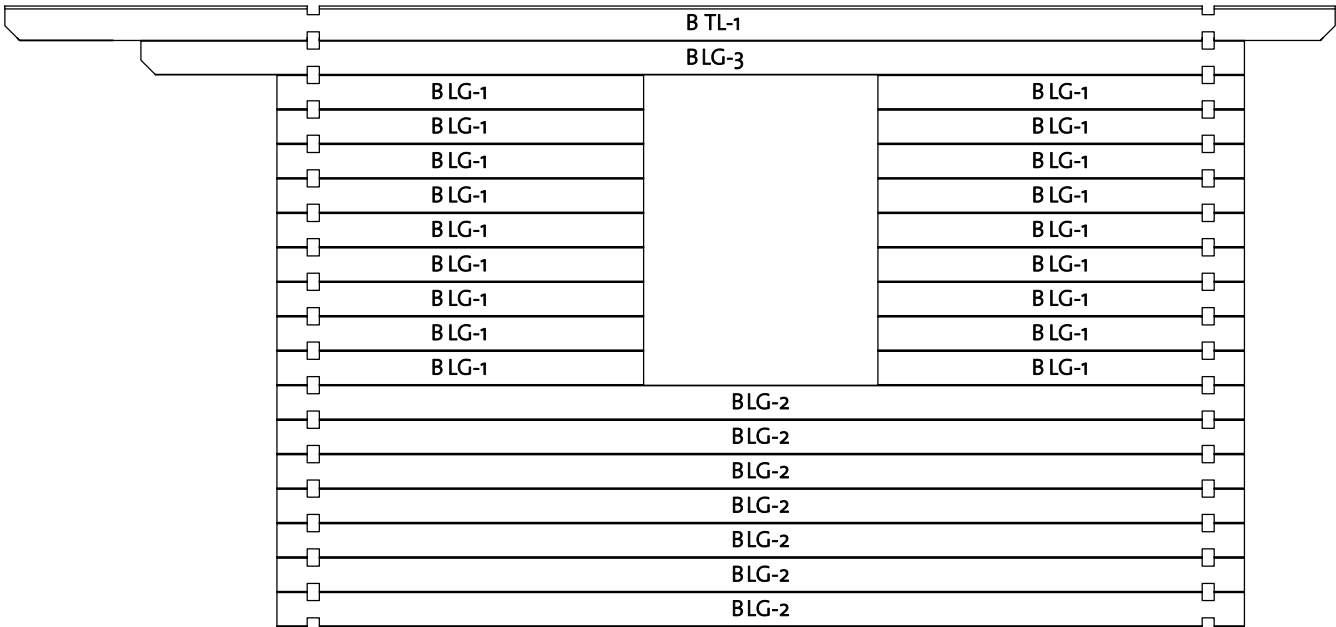


Log Profile Wall B	
Profile	Profile

40X114	
40X114	

Vello 3 40 (250x300)





Roof 1

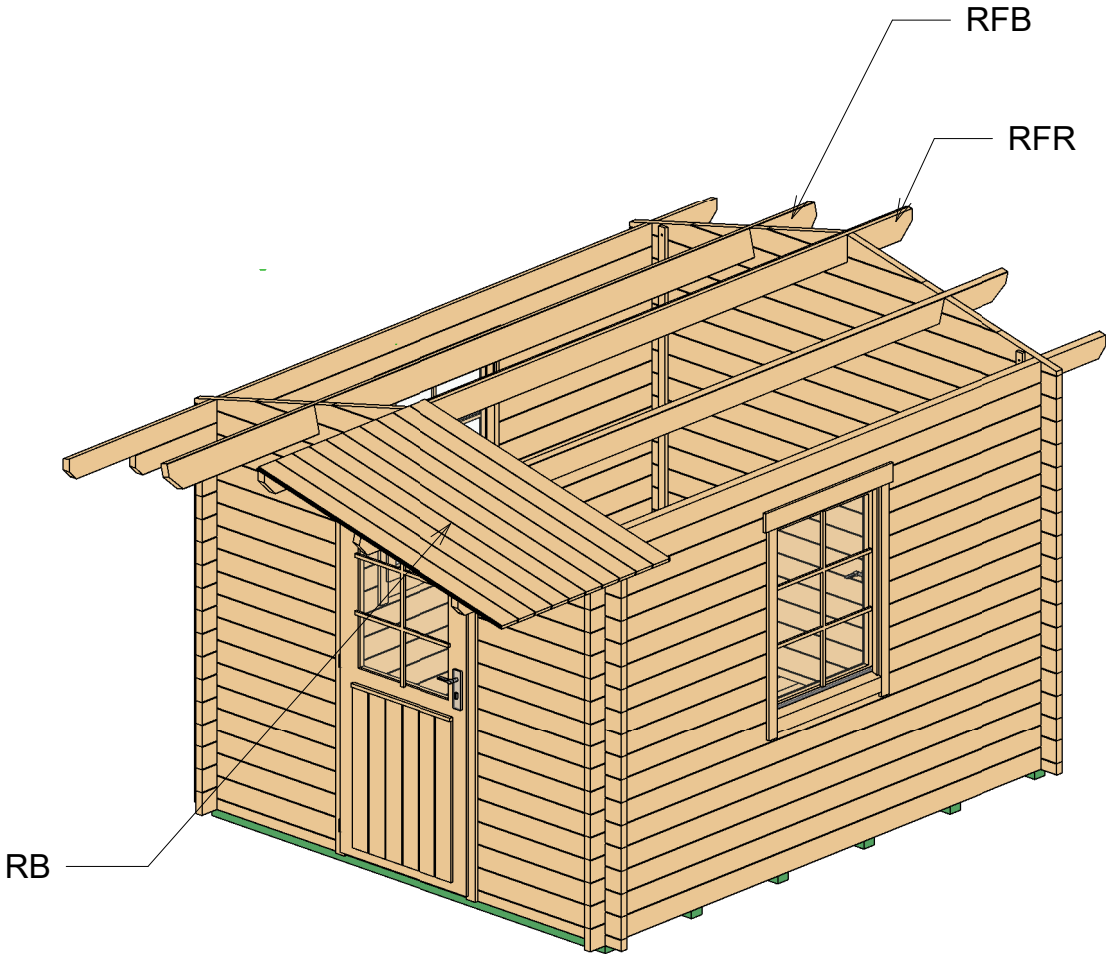

Roof				
Mark	Type	Profile	Count	Length
RFR	Ridge 40x143		1	4400
RFB	Beam 40x143		2	4400
RB	17x114		82	1589

Vello 3 40 (250x300)

Roof 2

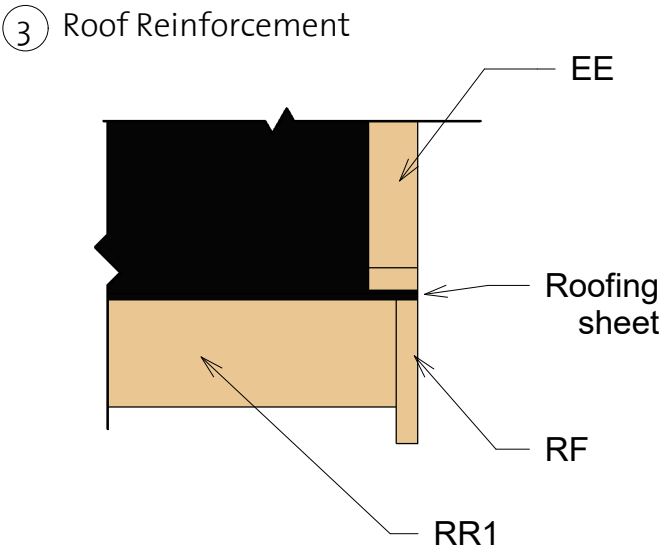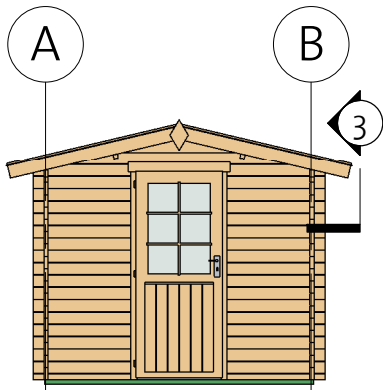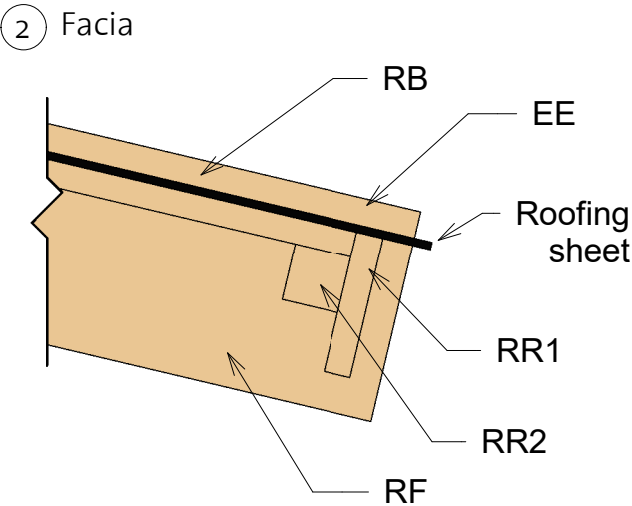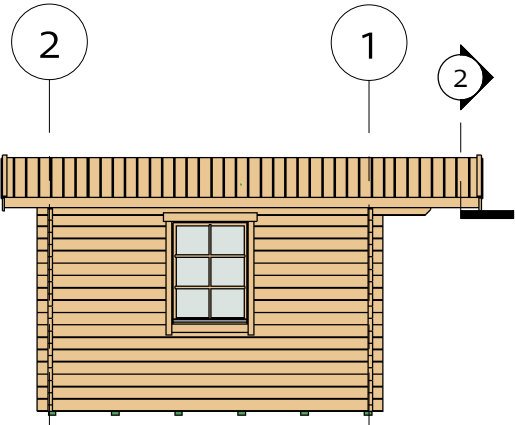

Fascia Schedule

Mark	Type	Profile	Count	Length
EE	Eave Edging 18x40		4	1631
RF	Roof Fascia 18x120		4	1631
RR1	Roof reinforce ment 18x95		2	4400
RR2	Roof reinforce ment 38x38		2	4400

Vello 3 40 (250x300)


Extras

CD4L	Classic door 4 left	840	1955	1
------	------------------------	-----	------	---

DCB6	Door Crossbar 6	--	--	1
------	--------------------	----	----	---

CW1R	Classic window 1 right	765	990	2
------	---------------------------	-----	-----	---

WCB6	Windows Crossbar 6	--	--	2
------	-----------------------	----	----	---



Type	Count	Length
------	-------	--------

Windboard 18x40	4	2200
-----------------	---	------

Romb	2
------	---



Hitblock	300-400 mm		
Screws	5,0 x 70		10
Bolts	M8 x 70		12
Screws	6,0 x 140		25
Nails	1,4 x 40		30
Screws	4,0 x 40		500

Vello 3 40 (250x300)

Lis of all items 1

Impregnated foundation beams

Mark	Type	Profile	Count	Length
IFB	IFB 70x40		6	2490

Floor Schedule

Mark	Type	Profile	Count	Length
FB	FB 17x114		22	2914

BB1	BB 20x40		2	3000
BB2	BB 20x40		2	2500

Roof

Mark	Type	Profile	Count	Length
RFR	Ridge 40x143		1	4400
RFB	Beam 40x143		2	4400
RB	17x114		82	1589

Fascia Schedule

Mark	Type	Profile	Count	Length
EE	Eave Edging 18x40		4	1631
RF	Roof Fascia 18x120		4	1631
RR1	Roof reinforce ment 18x95		2	4400
RR2	Roof reinforce ment 38x38		2	4400

Vello 3 40 (250x300)

List of all items 2

Wall 1			
Mark	Profile	Count	Cut Length

1BL-1	40x57	2	925
1LG-1	40x114	34	925
1LG-2 *	40x114	1	974
1LG-3 *	40x114	1	1938
1LG-4 *	40x114	1	2700

Wall 2			
Mark	Profile	Count	Cut Length

2BL-1	40x57	1	2700
2LG-1 *	40x114	1	974
2LG-2 *	40x114	1	1938
2LG-3	40x114	17	2700
2LG-4 *	40x114	1	2700

*Gable-delivered premounted


Wall A			
Mark	Profile	Count	Cut Length

ALG-1	40x114	18	1213
ALG-2	40x114	7	3200
ALG-3	40x114	1	3650
ATL-1	40x114	1	4400

Wall B			
Mark	Profile	Count	Cut Length

BLG-1	40x114	18	1213
BLG-2	40x114	7	3200
BLG-3	40x114	1	3650
BTL-1	40x114	1	4400

Log profiles	
Profile	Profile

40x57	
40x114	

Log profiles	
Profile	Profile

40x114	
--------	--