
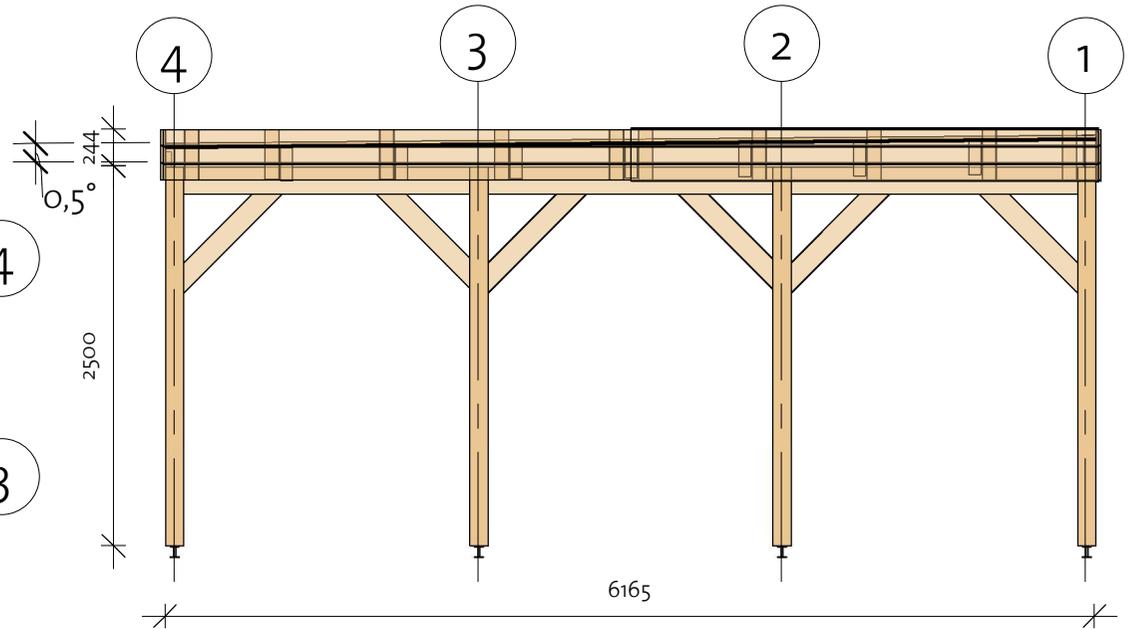


Carport (616x616)

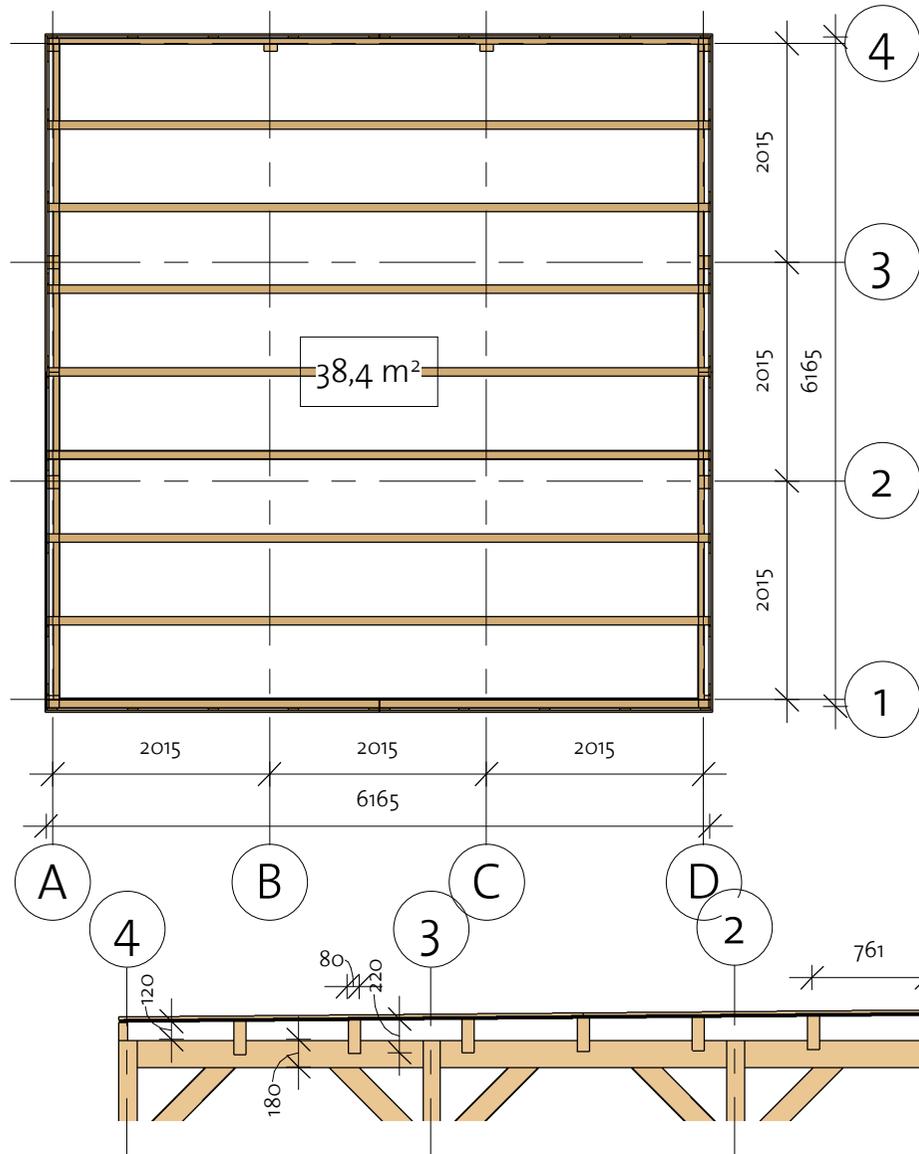

Carport (616x616)

Floor Plan



| Columns | | | |
|---------|---------|-------|--------|
| Mark | Profile | Count | Length |

| | | | |
|-----|-----------------|---|------|
| CM1 | Post 120X120 | 8 | 2500 |
| CM2 | Post 120X120 | 2 | 2500 |

| Diagonals | | | | |
|-----------|------|---------|-------|--------|
| Mark | Type | Profile | Count | Length |


| | | | | |
|----|----------------|---|----|-----|
| CD | Beam 40X143 |  | 20 | 922 |
|----|----------------|---|----|-----|

① Column section

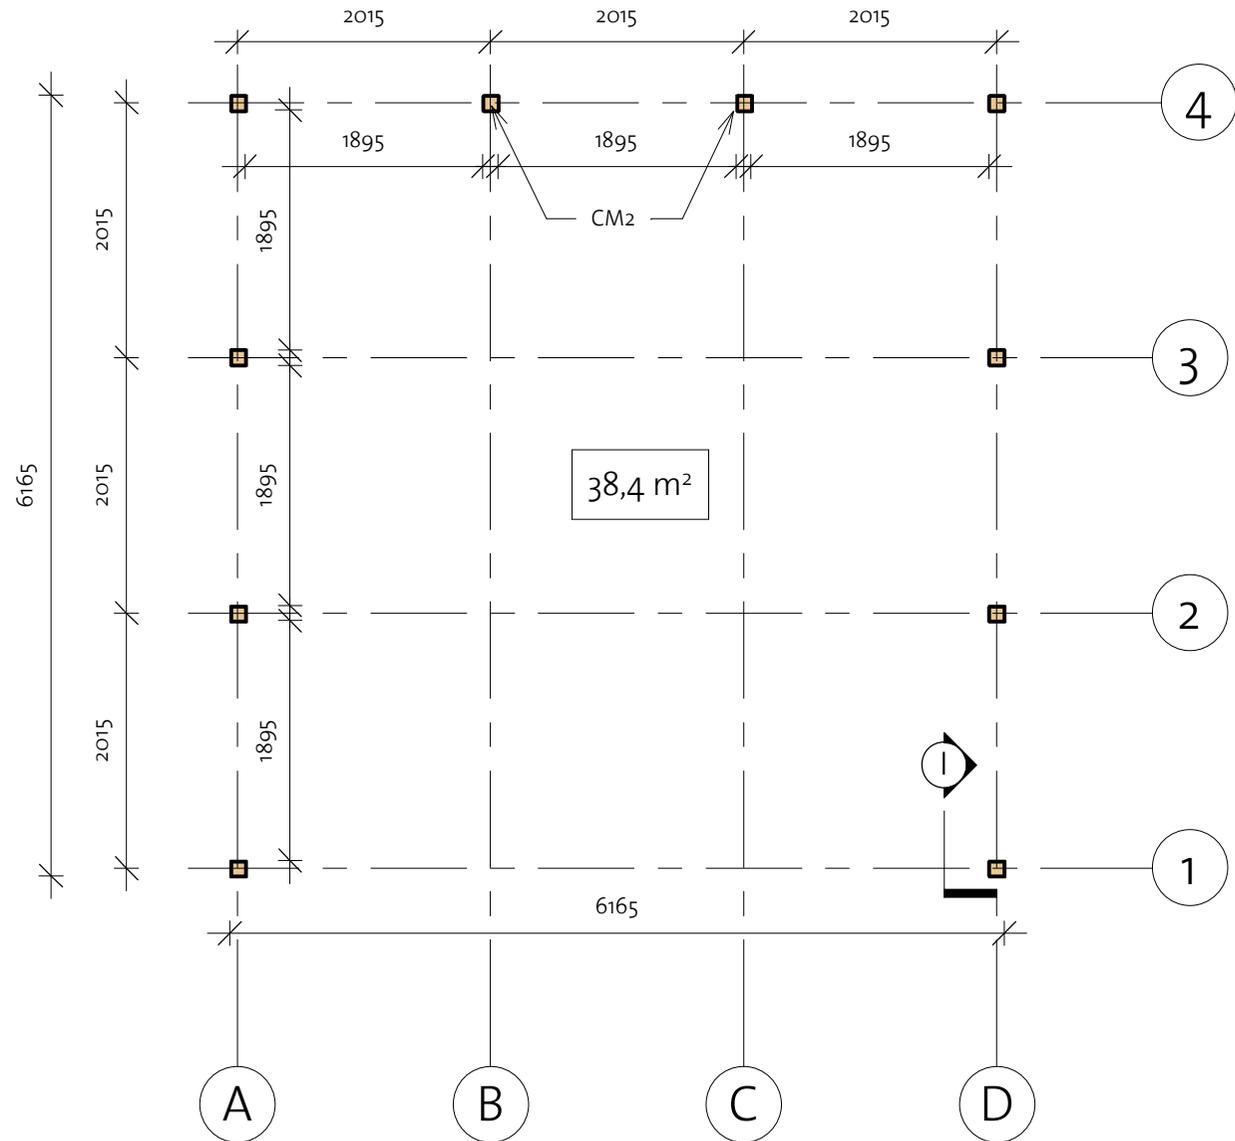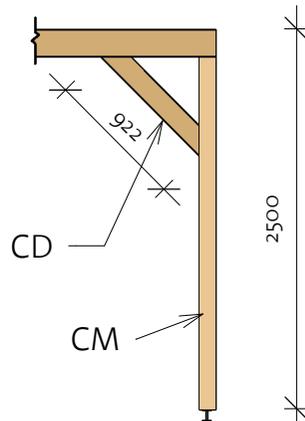

Carport (616x616)

Roof 1

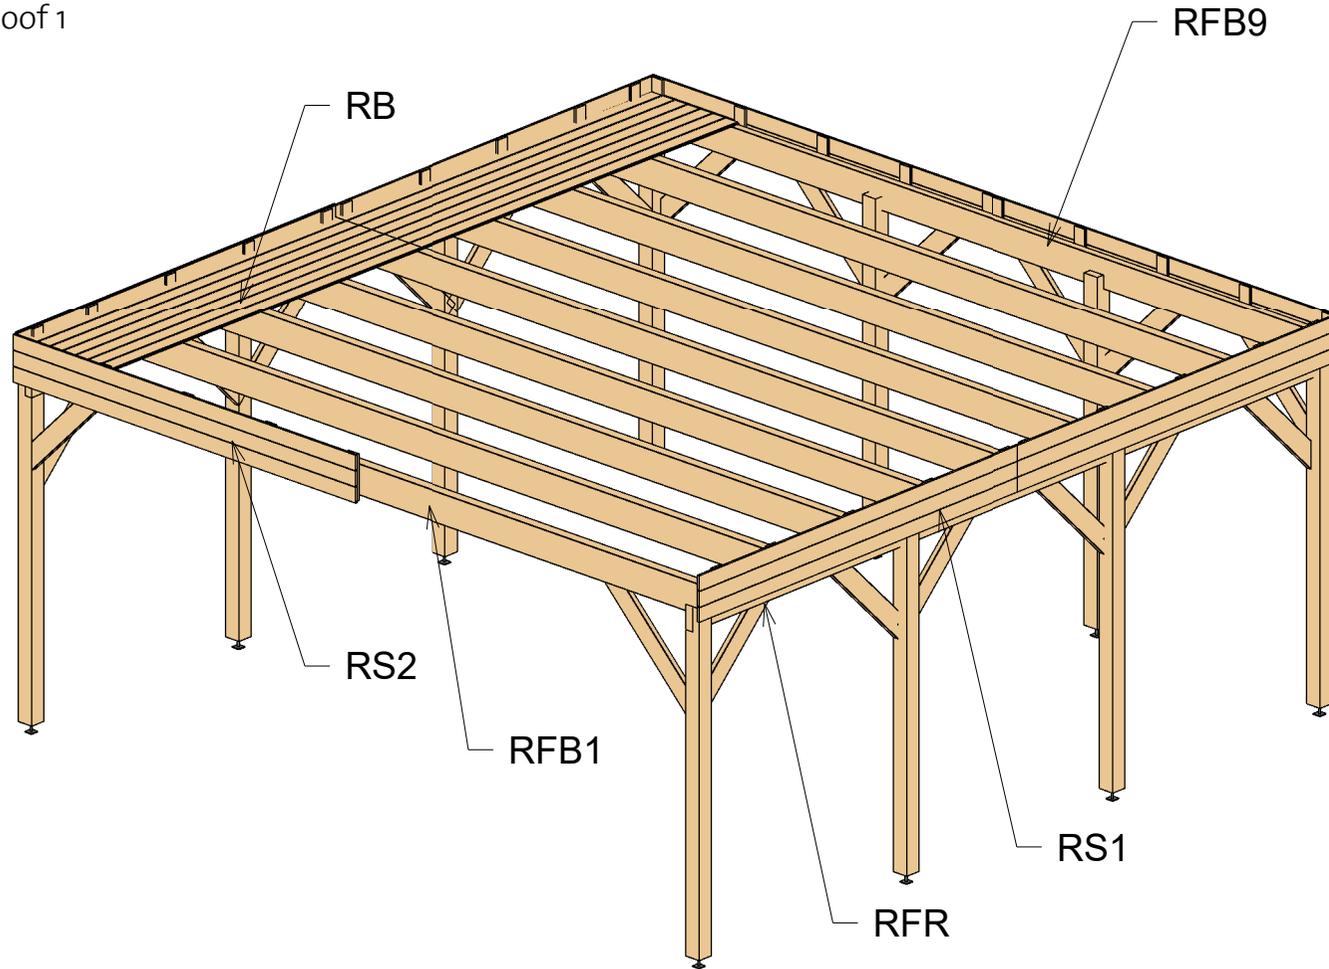


| Roof Side Schedule | | |
|--------------------|--------|-------|
| Type | Length | Count |

| | | |
|-----|------|---|
| RS1 | 3100 | 4 |
| RS2 | 3099 | 4 |

| Roof | | | | |
|------|----------------|---------|-------|--------|
| Mark | Type | Profile | Count | Length |
| RB | 17x114 | | 110 | 3080 |
| RFB1 | Beam 80x220 | | 1 | 6165 |
| RFB2 | Beam 80x220 | | 1 | 6165 |
| RFB3 | Beam 80x220 | | 1 | 6165 |
| RFB4 | Beam 80x220 | | 1 | 6165 |
| RFB5 | Beam 80x220 | | 1 | 6165 |
| RFB6 | Beam 80x220 | | 1 | 6165 |
| RFB7 | Beam 80x220 | | 1 | 6165 |
| RFB8 | Beam 80x220 | | 1 | 6165 |
| RFB9 | Beam 60x220 | | 1 | 6165 |
| RFR | Beam 60x180 | | 2 | 6165 |

Carport (616x616)


Roof 2

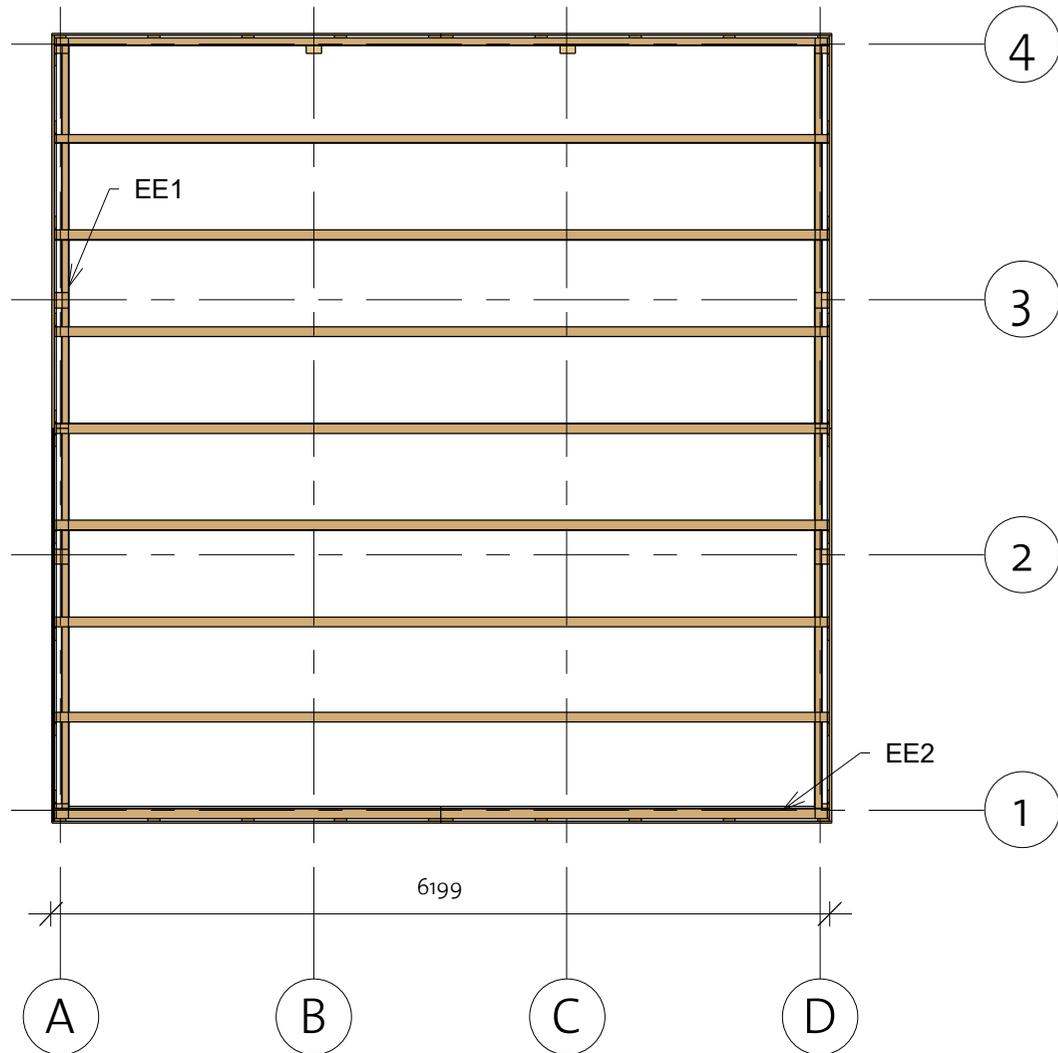

| Fascia Schedule | | | | |
|-----------------|----------------------|---|-------|--------|
| Mark | Type | Profile | Count | Length |
| EE1 | Eave Edging 18x95 |  | 4 | 3082 |
| EE2 | Eave Edging 18x95 |  | 2 | 2969 |

Carport (616x616)

Roof 3

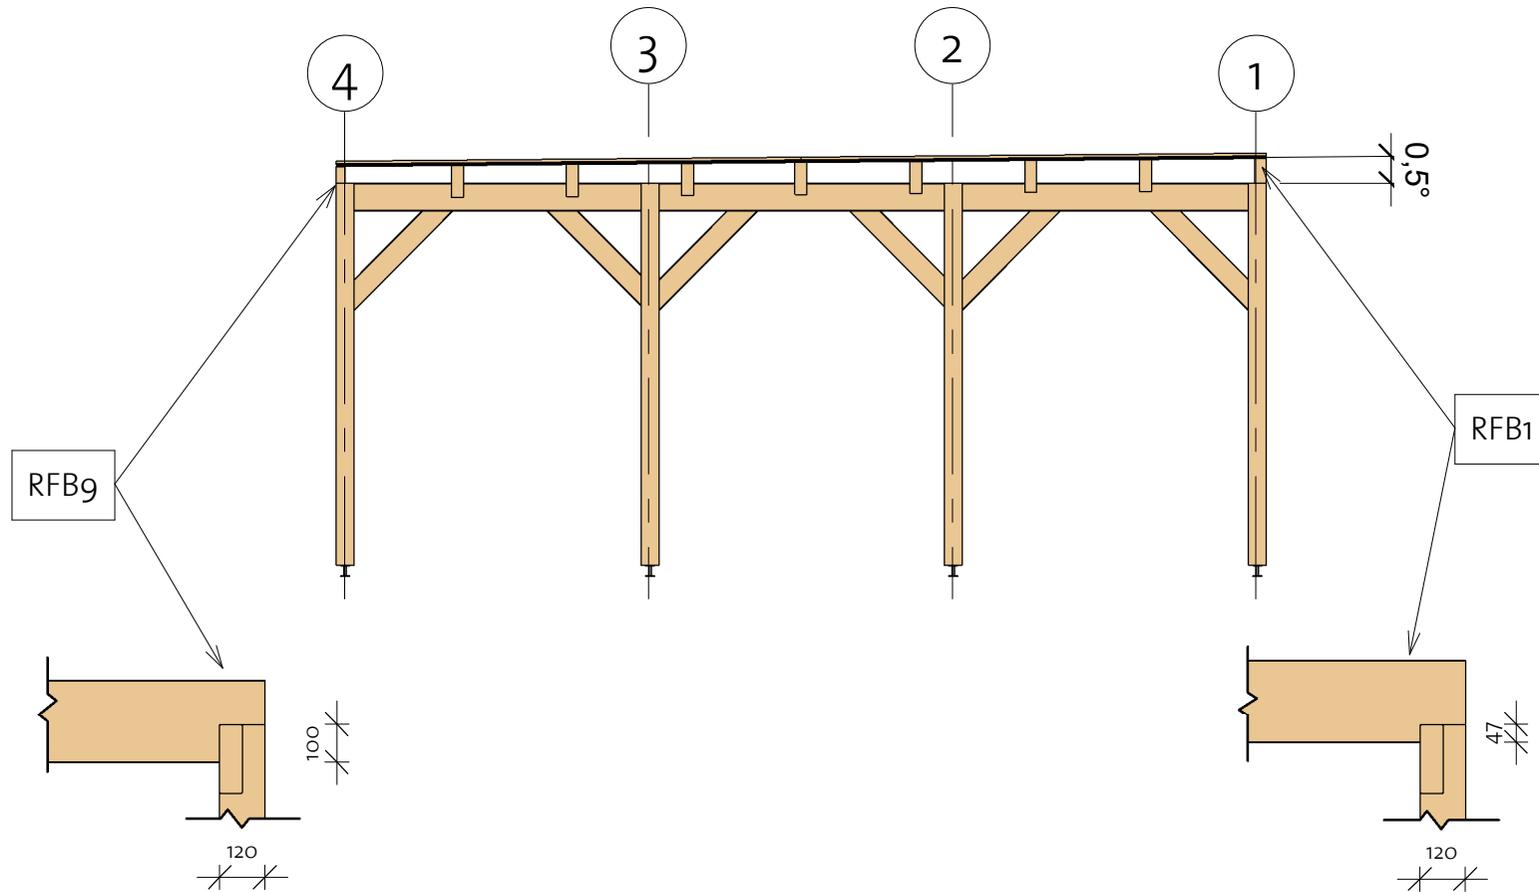

Carport (616x616)

List of all items 1

Fascia Schedule

| Mark | Type | Profile | Count | Length |
|------|----------------------|---|-------|--------|
| EE1 | Eave Edging 18x95 |  | 4 | 3082 |
| EE2 | Eave Edging 18x95 |  | 2 | 2969 |

Columns


| Mark | Profile | Count | Length |
|------|-----------------|-------|--------|
| CM1 | Post 120X120 | 8 | 2500 |
| CM2 | Post 120X120 | 2 | 2500 |

Diagonals

| Mark | Type | Profile | Count | Length |
|------|----------------|---|-------|--------|
| CD | Beam 40X143 |  | 20 | 922 |

Roof Side Schedule


| Type | Length | Count |
|------|--------|-------|
| RS1 | 3100 | 4 |
| RS2 | 3099 | 4 |

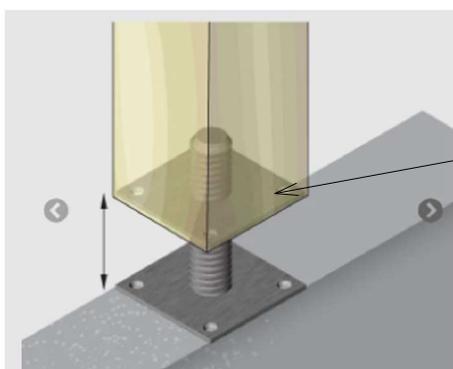

4x6x90

9226111_201215

Roof

| Mark | Type | Profile | Count | Length |
|------|----------------|---|-------|--------|
| RB | 17x114 |  | 110 | 3080 |
| RFB1 | Beam 80x220 |  | 1 | 6165 |
| RFB2 | Beam 80x220 | | 1 | 6165 |
| RFB3 | Beam 80x220 | | 1 | 6165 |
| RFB4 | Beam 80x220 | | 1 | 6165 |
| RFB5 | Beam 80x220 | | 1 | 6165 |
| RFB6 | Beam 80x220 | | 1 | 6165 |
| RFB7 | Beam 80x220 | | 1 | 6165 |
| RFB8 | Beam 80x220 | | 1 | 6165 |
| RFB9 | Beam 60x220 | | 1 | 6165 |
| RFR | Beam 60x180 | | 2 | 6165 |

Fasteners/Extras

| Name | Type | Count |
|----------------------|------------------|-------|
| Adjustable post foot | M30 100x100x8 | 10 |
| Bolts, nut, washer | M12 x 160 | 20 |
| Screws | 8,0 x 200 | 20 |
| Screws | 6,0 x 160 | 40 |
| Screws | 6,0x 90 | 40 |
| Screws | 4,0 x 40 | 800 |