



Hundehütte 28 (72.6x90)

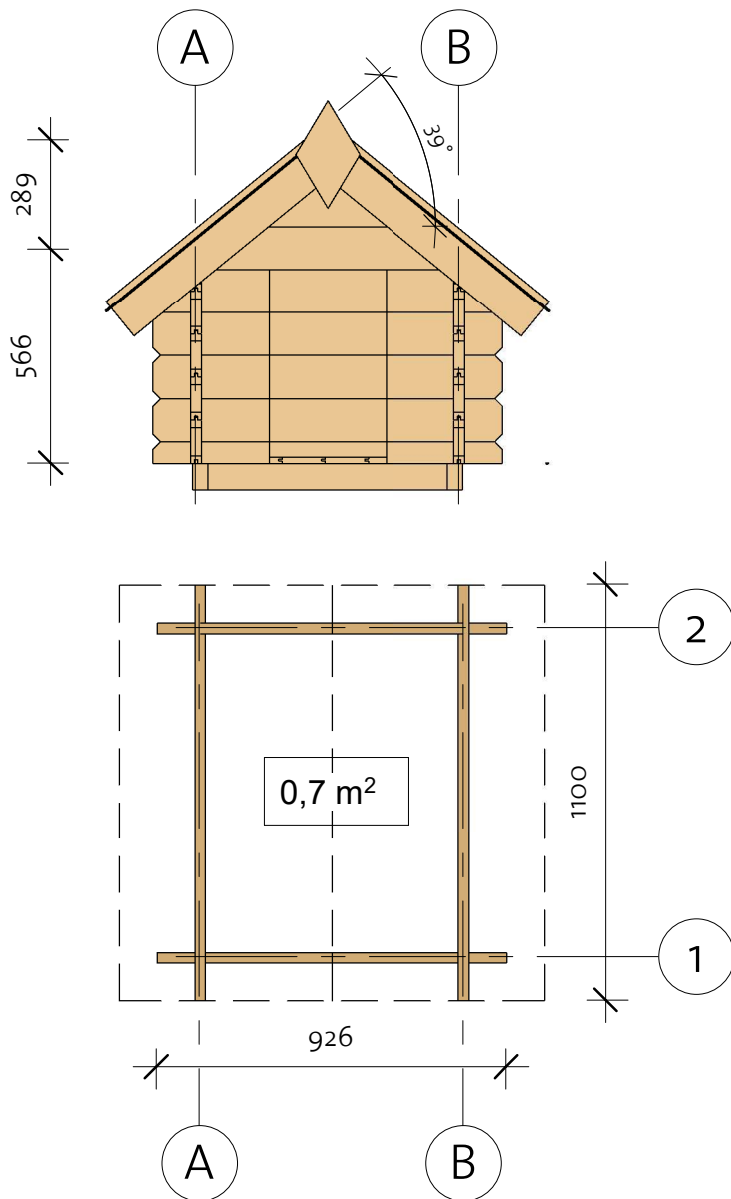

Hundehütte 28 (72.6x90)

Foundation

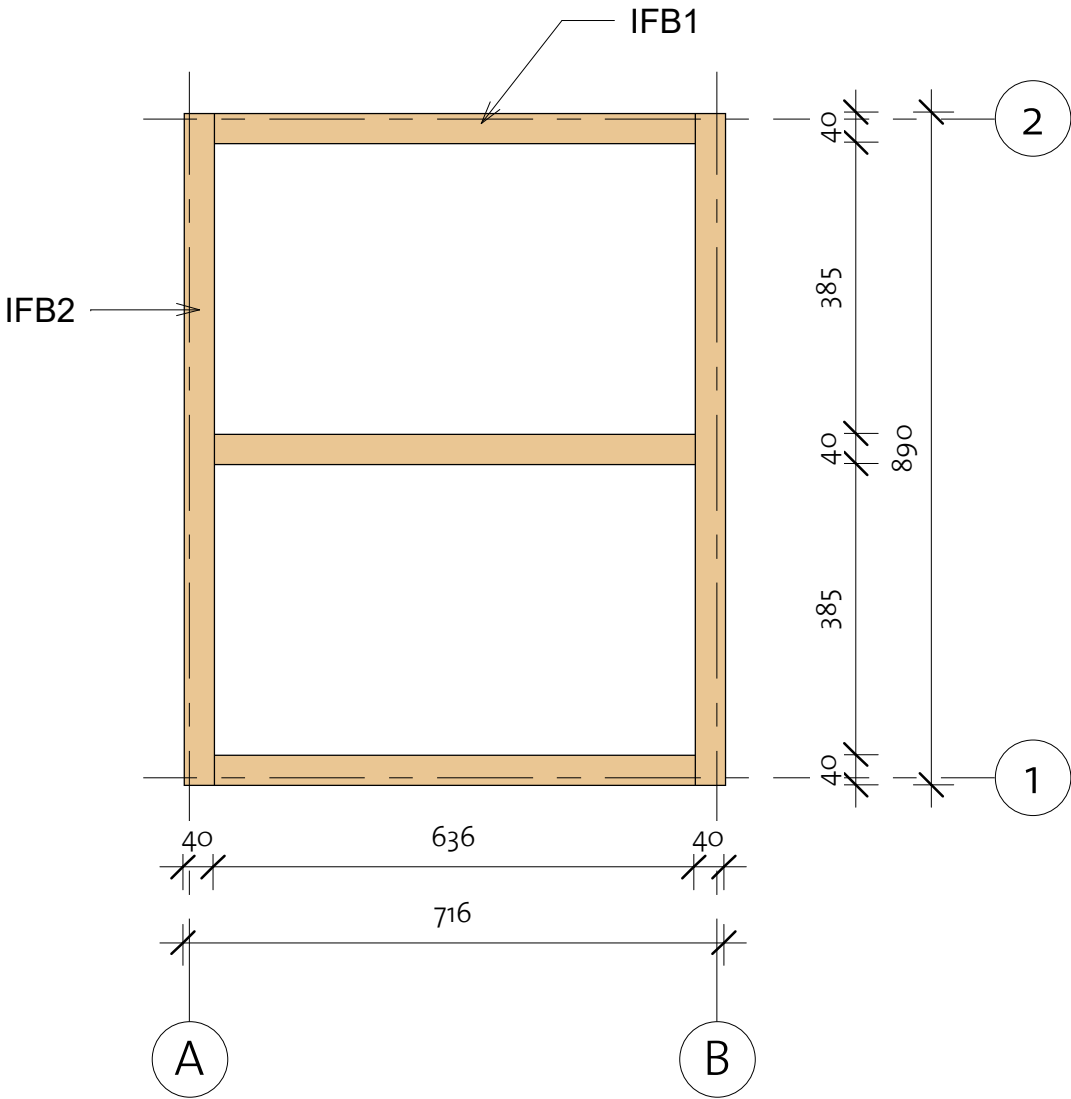


Impregnated foundation beams				
Mark	Type	Profile	Count	Length
IFB1	IFB 40x70		3	636
IFB2	IFB 40x70		2	890


Hundehütte 28 (72.6x90)

Floor Plan

① Foundation

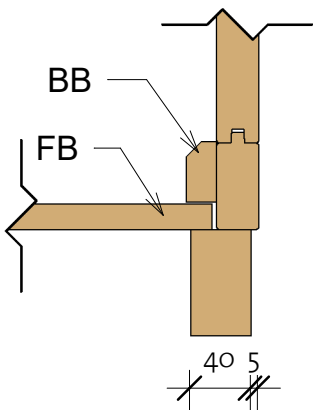


Floor Schedule				
Mark	Type	Profile	Count	Length
FB	FB 17x114		6	838
BB1	BB 18x40		2	726
BB2	BB 18x40		2	900

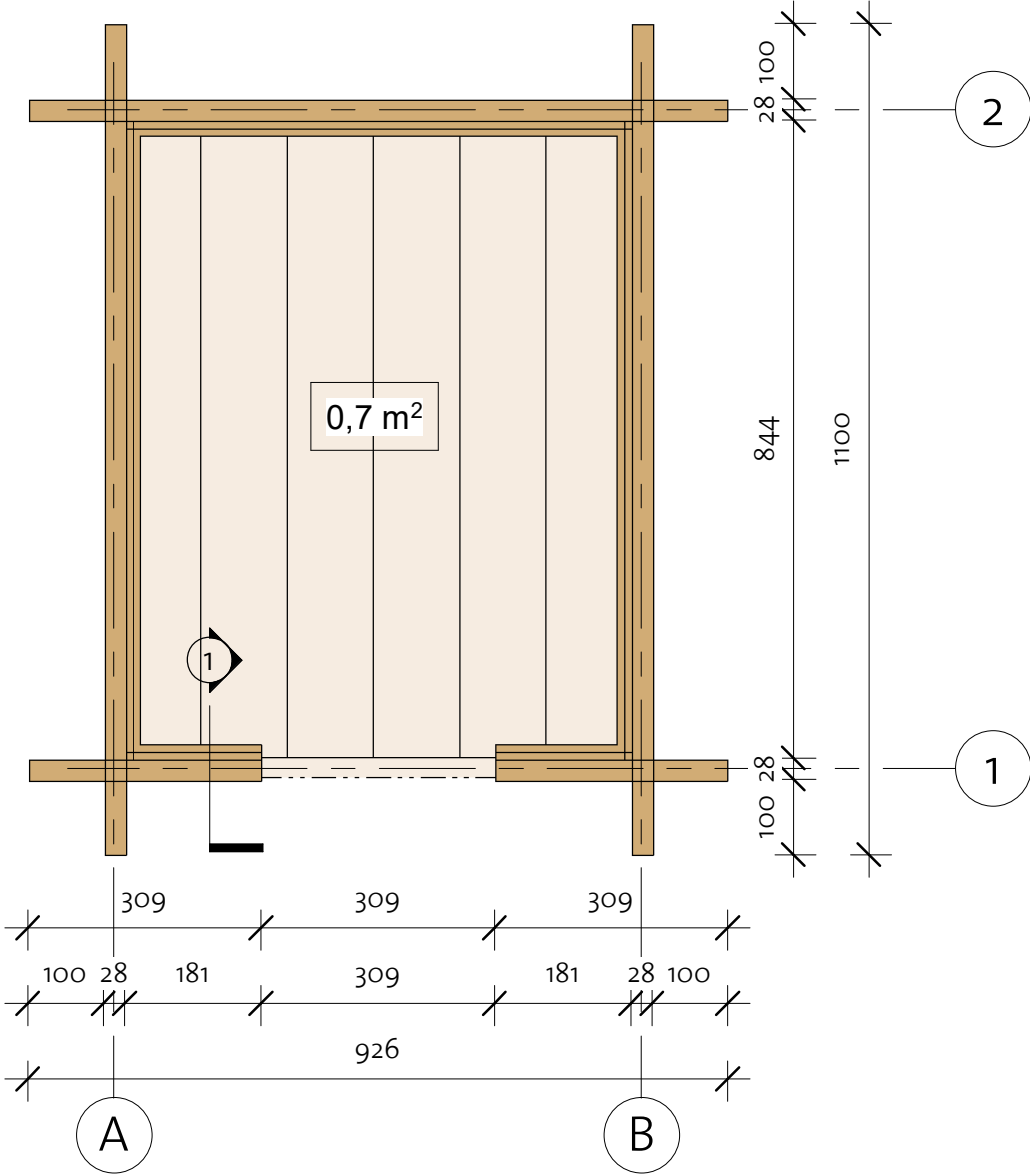

Hundehütte 28 (72.6x90)


Wall 1

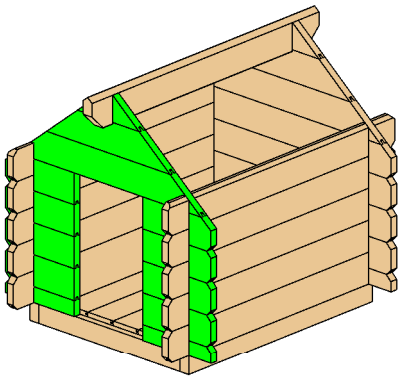

Wall 1			
Mark	Profile	Count	Cut Length

1BL-1	28x57	2	309
1LG-1 *	28x114	1	280
1LG-2	28x114	6	309
1LG-3 *	28x114	2	309
1LG-4*	28x114	1	559
1LG-5*	28x114	1	837

Gable - delivered premounted

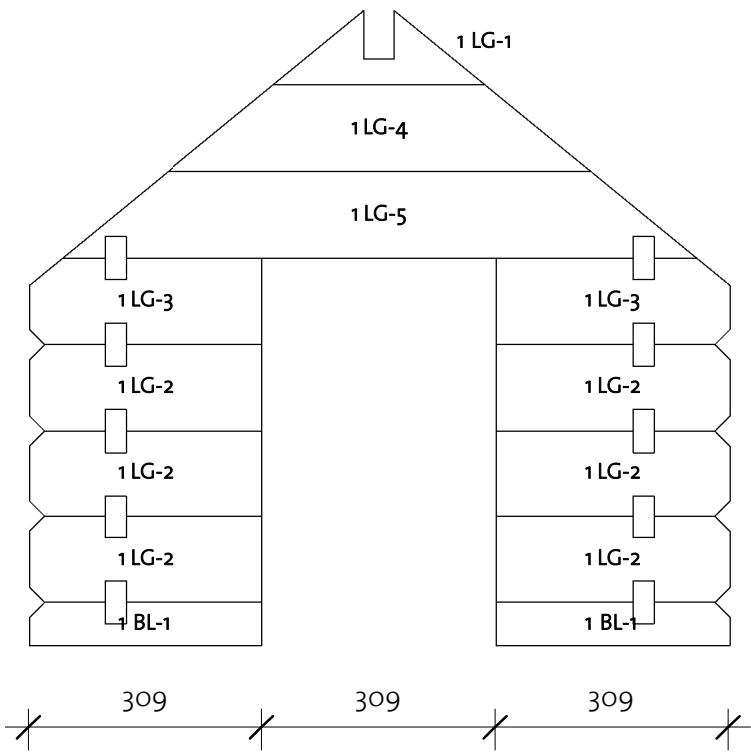


Log Profile Wall 1	
Profile	Profile

28x57	
28x114	

Hundehütte 28 (72.6x90)


Wall 2

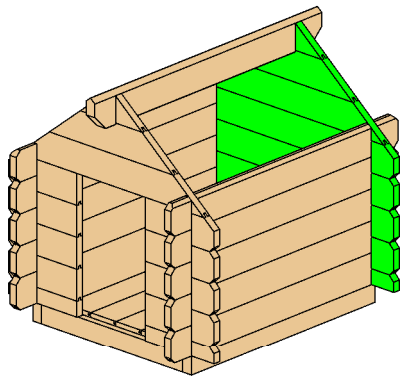

Wall 2			
Mark	Profile	Count	Cut Length

2BL-1	28x57	1	926
2LG-1*	28x114	1	280
2LG-2*	28x114	1	559
2LG-3*	28x114	1	837
2LG-4*	28x114	1	926
2LG-5	28x114	3	926

* Gable - delivered premounted

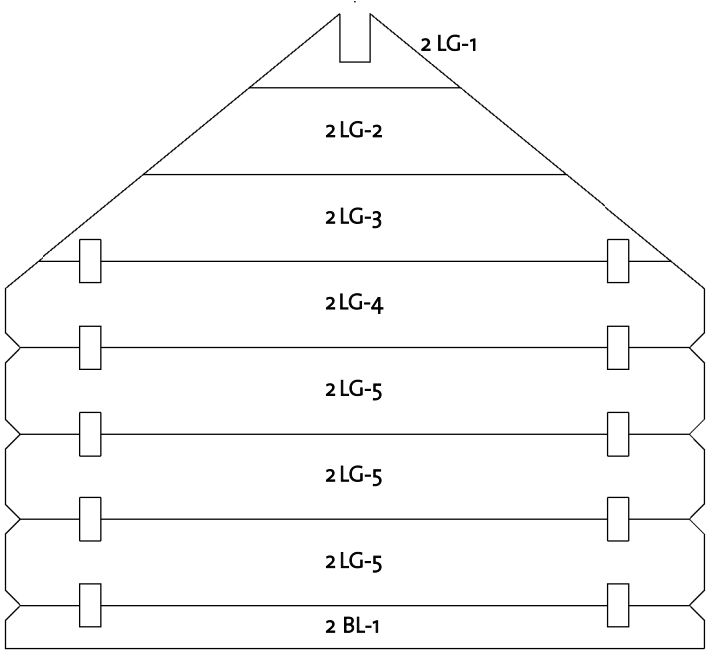


Log Profile Wall 2	
Profile	Profile

28x57	
28x114	


Hundehütte 28 (72.6x90)

Wall A

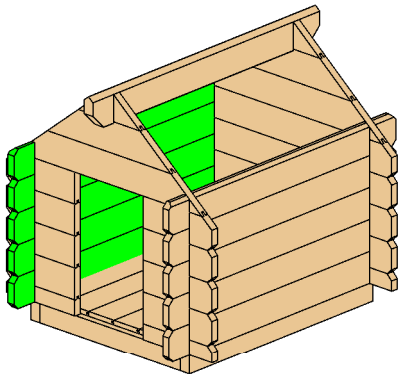

Wall A			
Mark	Profile	Count	Cut Length

ALG-1	28x114	4	1100
ATL-1	28x114	1	1100

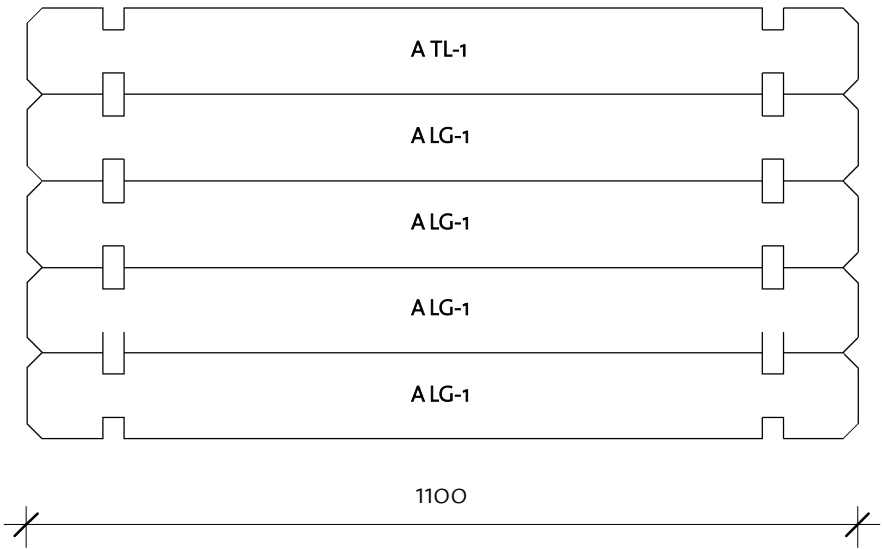


Log Profile Wall A	
Profile	Profile

28x114	
28x114	


Hundehütte 28 (72.6x90)

Wall B

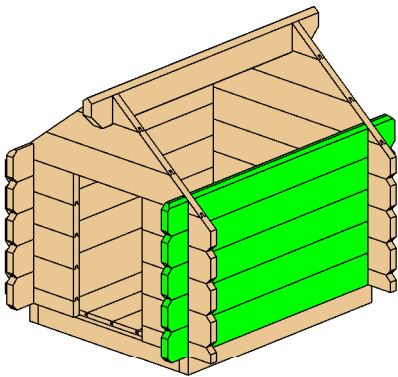

Wall B			
Mark	Profile	Count	Cut Length

BLG-1	28x114	4	1100
BTL-1	28x114	1	1100

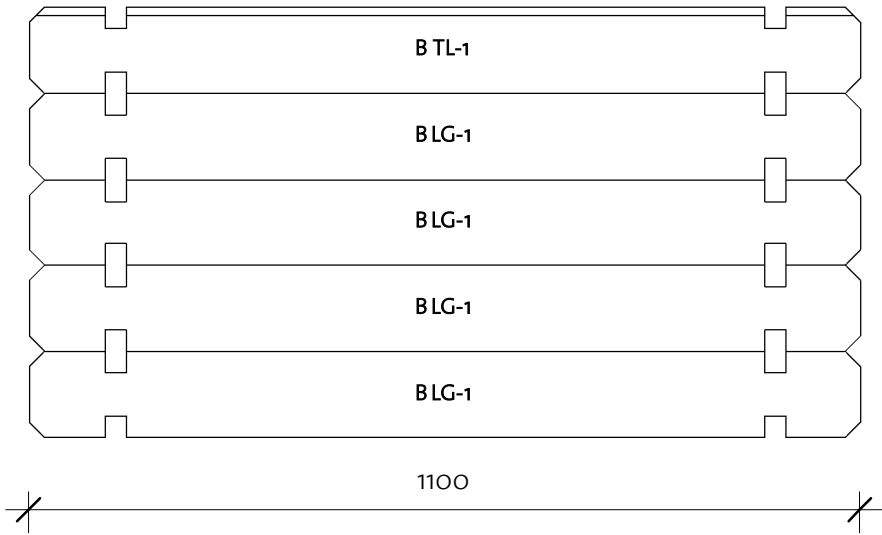


Log Profile Wall B	
Profile	Profile

28x114	
28x114	

Hundehütte 28 (72.6x90)




Roof 1

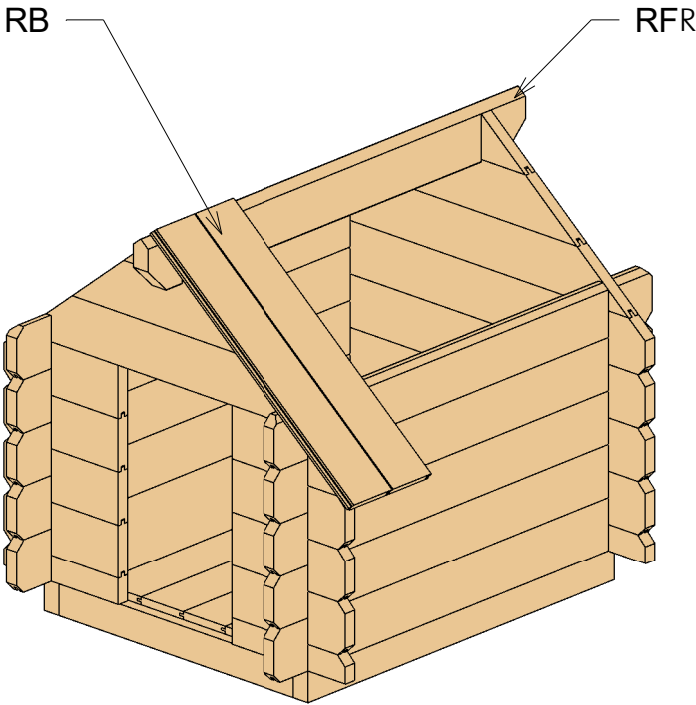


Roof				
Mark	Type	Profile	Count	Length
RFR	Ridge 40x120		1	1100
RB	17x114		20	694

Hundehütte 28 (72.6x90)

Roof 2

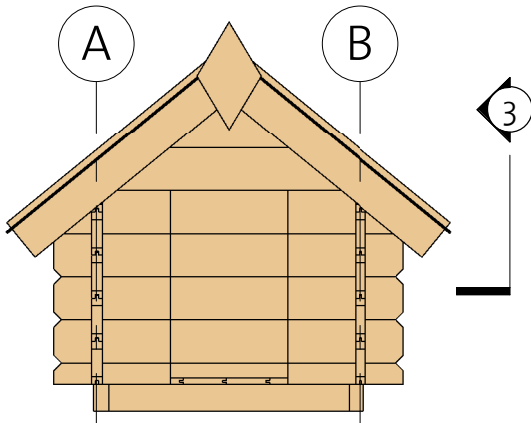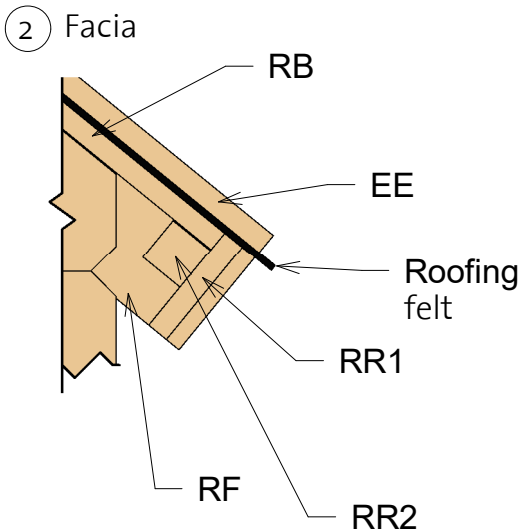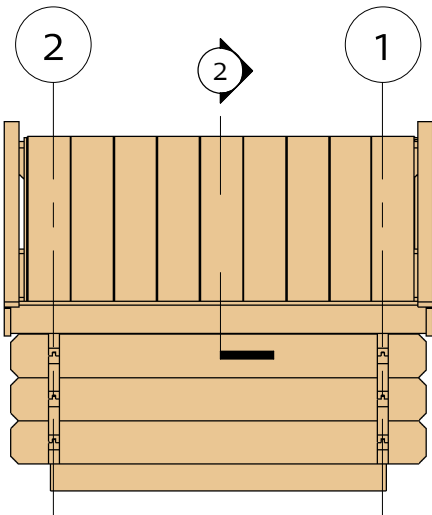

3 Roof Reinforcement

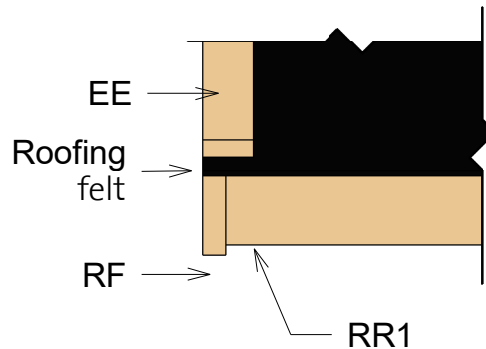

Fascia Schedule

Mark	Type	Profile	Count	Length
EE	Eave Edging 18x40		4	740
RF	Roof Fascia 18x95		4	740
RR1	Roof reinforcement 18x95		2	1100
RR2	Roof reinforcement 38x38		2	1100

Hundehütte 28 (72.6x90)

List of all items 1

Impregnated foundation beams

Mark	Type	Profile	Count	Length
IFB1	IFB 40x70		3	636
IFB2	IFB 40x70		2	890

Floor Schedule

Mark	Type	Profile	Count	Length
FB	FB 17x114		6	838
BB1	BB 18x40		2	726
BB2	BB 18x40		2	900

Roof

Mark	Type	Profile	Count	Length
RFR	Ridge 40x120		1	1100
RB	17x114		20	694

Fascia Schedule

Mark	Type	Profile	Count	Length
EE	Eave Edging 18x40		4	740
RF	Roof Fascia 18x95		4	740
RR1	Roof reinforcement 18x95		2	1100
RR2	Roof reinforcement 38x38		2	1100

Fasteners/Extras

Name	Type	Count
Hitblock	300-400 mm	
Screws	5,0 x 70	10
Nails	1,4 x 40	15
Screws	6,0 x 140	25
Screws	4,0 x 40	50
Screws	4,0 x 50	75

Hundehütte 28 (72.6x90)

List of all items 2

Wall 1

Mark	Profile	Count	Cut Length
------	---------	-------	------------

1BL-1	28x57	2	309
1LG-1*	28x114	1	280
1LG-2	28x114	6	309
1LG-3*	28x114	2	309
1LG-4*	28x114	1	559
1LG-5*	28x114	1	837

Wall A

Mark	Profile	Count	Cut Length
------	---------	-------	------------

ALG-1	28x114	4	1100
ATL-1	28x114	1	1100

Romb

Type	Count
------	-------

Romb	2
------	---



Wall 2

Mark	Profile	Count	Cut Length
------	---------	-------	------------

2BL-1	28x57	1	926
2LG-1*	28x114	1	280
2LG-2*	28x114	1	559
2LG-3*	28x114	1	837
2LG-4*	28x114	1	926
2LG-5	28x114	3	926

Gable - delivered premounted

Wall B

Mark	Profile	Count	Cut Length
------	---------	-------	------------

BLG-1	28x114	4	1100
BTL-1	28x114	1	1100


Log Profiles

Profile	Profile
---------	---------

28x57	
28x114	

Log Profiles

Profile	Profile
---------	---------

28x114	
--------	---