



Brantevik I 40 (360x300)

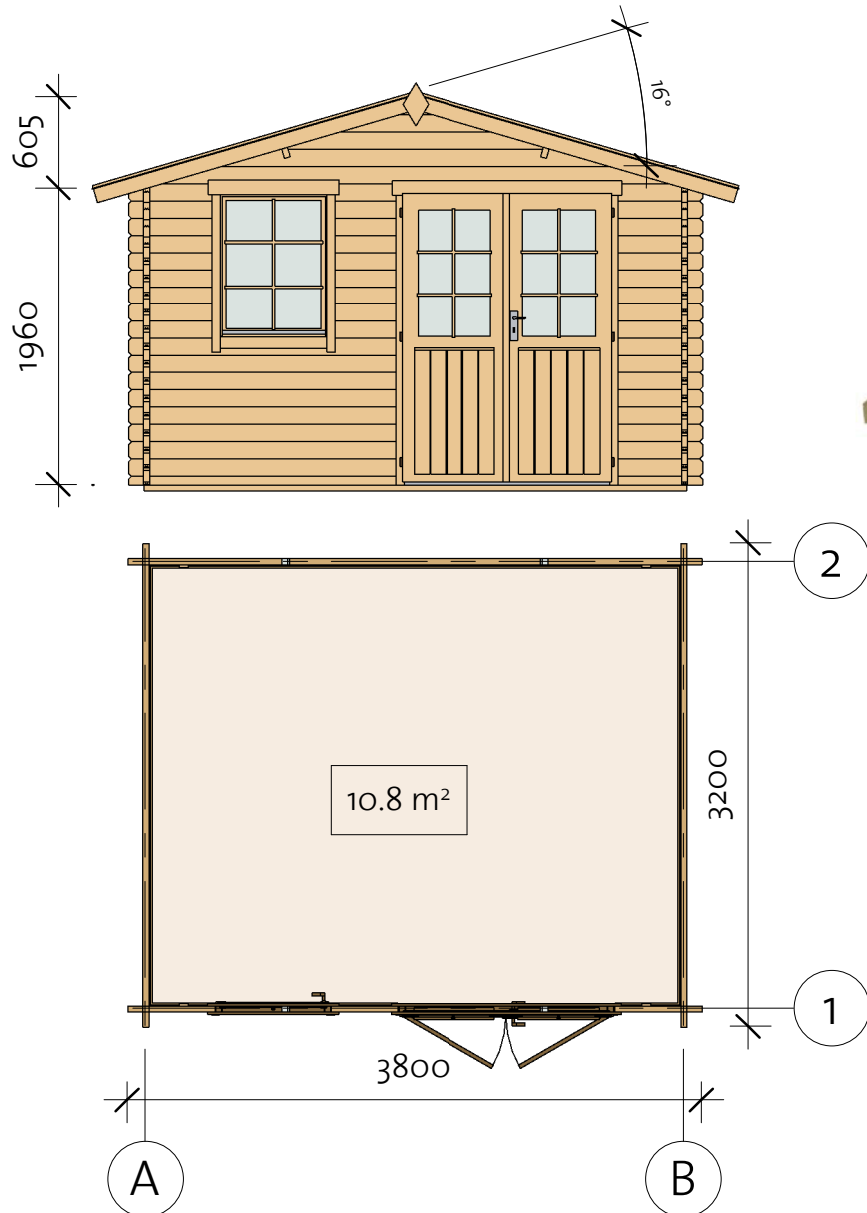

Brantevik I 40 (360x300)

Foundation

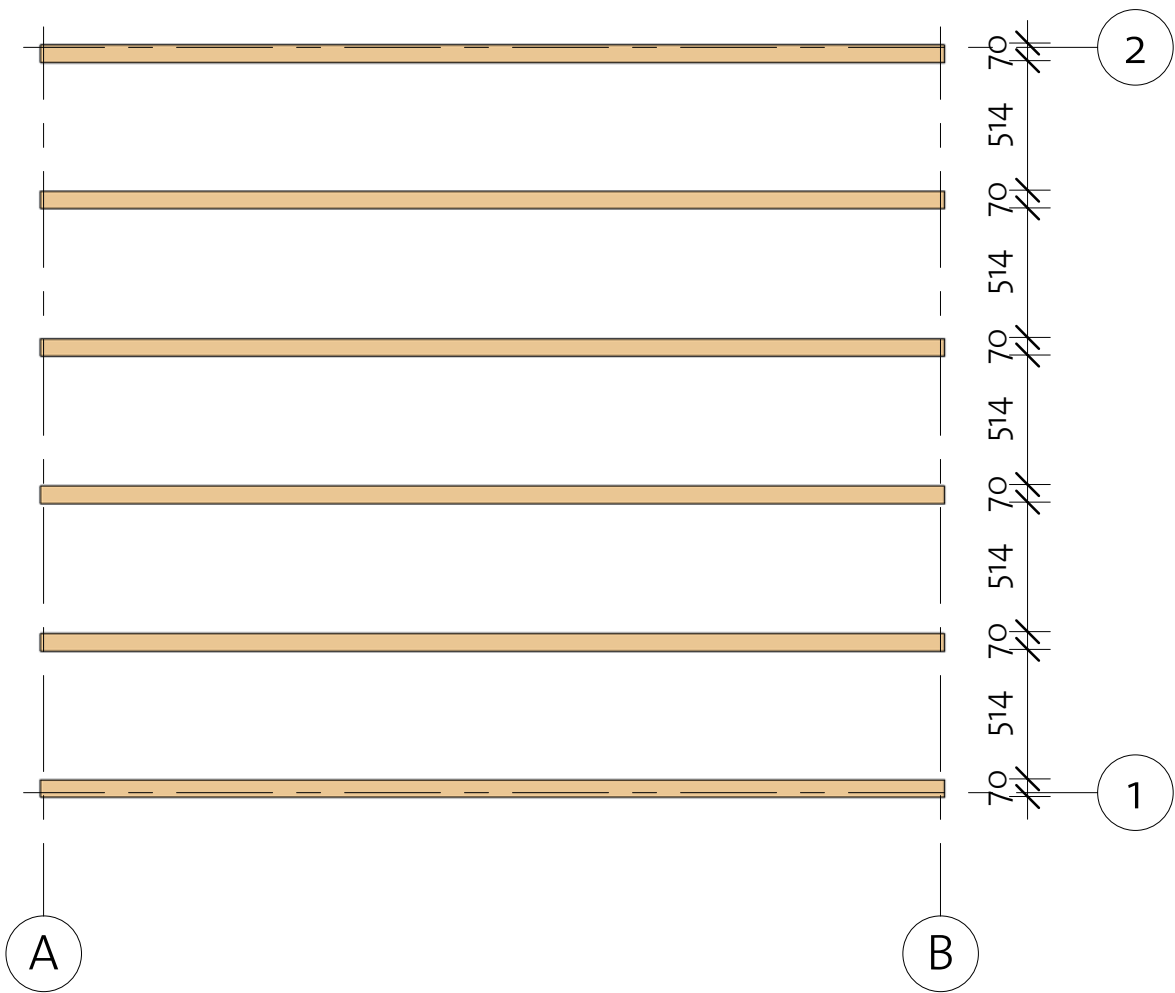

Impregnated foundation beams				
Mark	Type	Profile	Count	Length
IFB	IFB 40x70		6	3590

Floor Plan

Diagram illustrating the joint between a Baseboard (BB) and a Floorboard (FB). The Baseboard (BB) is shown as a vertical piece, and the Floorboard (FB) is shown as a horizontal piece. The joint is a butt joint, where the two pieces meet at a 90-degree angle. The Baseboard (BB) is labeled with 'BB' and the Floorboard (FB) is labeled with 'FB'.



Mark	Type	Profile	Count	Length
------	------	---------	-------	--------

BB1	BB 20x40		2	3600
BB2	BB 20x40		2	3000

Technical drawing of a rectangular room with dimensions and area. The room is labeled with a central area of 10,8 m². The overall dimensions are 3520 (width) and 2920 (height). The drawing includes a detailed view of the bottom edge showing a triangular cutout with a width of 1440 and a height of 440. The bottom edge is divided into segments of 575, 770, 440, and 575, totaling 3560. The right edge is divided into segments of 40, 100, 2920, and 40, totaling 3200. The drawing is labeled with 'A' and 'B' at the bottom corners and '1' and '2' at the top corners. The area is labeled '10,8 m²'.

Brantevik I 40 (360x300)

Wall 1

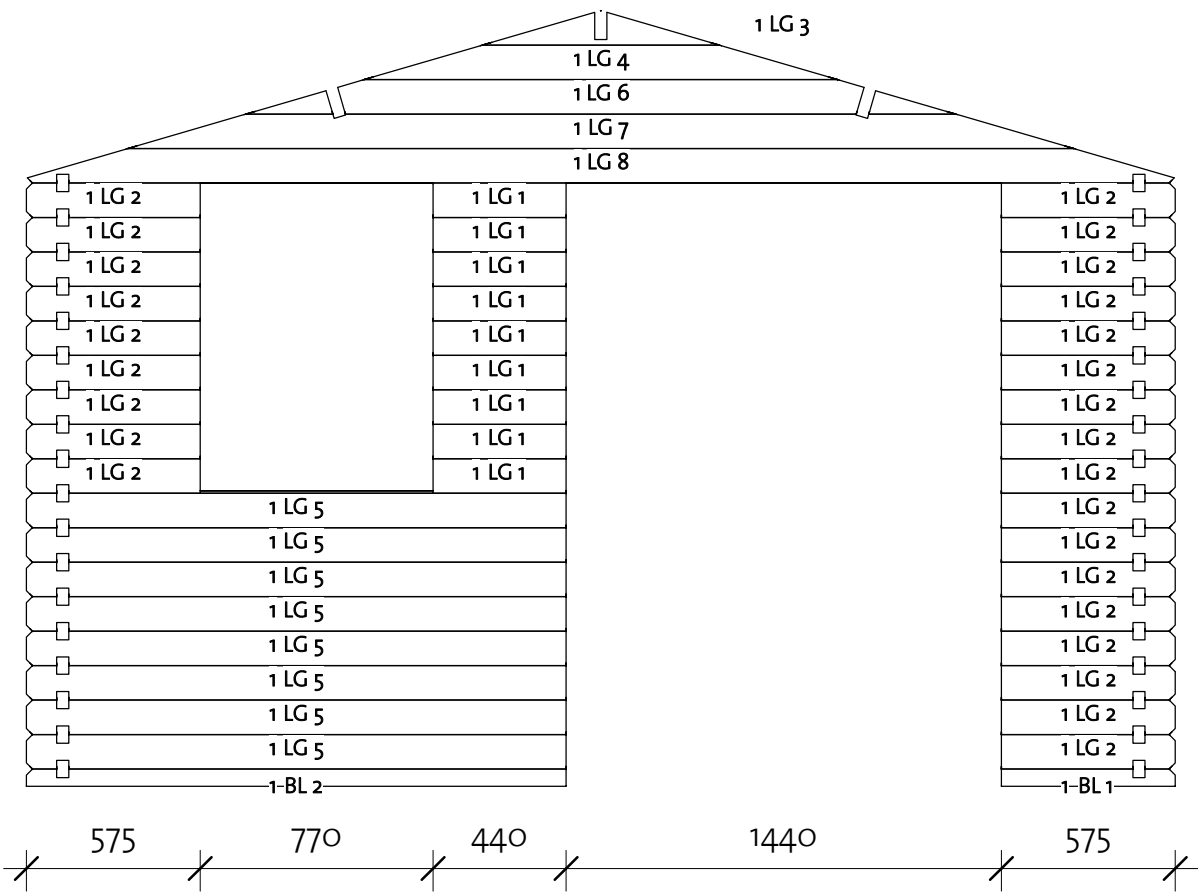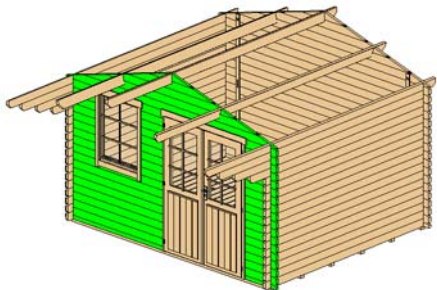

Wall 1			
Mark	Profile	Count	Cut Length

1BL 1	40X57	1	575
1BL 2	40X57	1	1785
1LG 1	40X114	9	440
1LG 2	40X114	26	575
1LG 3*	40X114	1	784
1LG 4*	40X114	1	1566
1LG 5	40X114	8	1785
1LG 6*	40X114	1	2347
1LG 7*	40X114	1	3129
1LG 8*	40X114	1	3794


*Gable-delivered premounted

Log Profile Wall 1	
Profile	Profile

40X57	
40X114	

Brantevik I 40 (360x300)

Wall 2

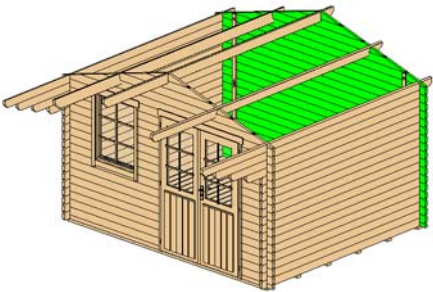


Wall 2			
Mark	Profile	Count	Cut Length

2BL 1	40x57	1	3800
2LG 1 *	40x114	1	784
2LG 2 *	40x114	1	1566
2LG 3 *	40x114	1	2347
2LG 4 *	40x114	1	3129
2LG 5 *	40x114	1	3794
2LG 6	40x114	17	3800

*Gable-delivered premounted


Log Profile Wall 2	
Profile	Profile

40x57	
40x114	

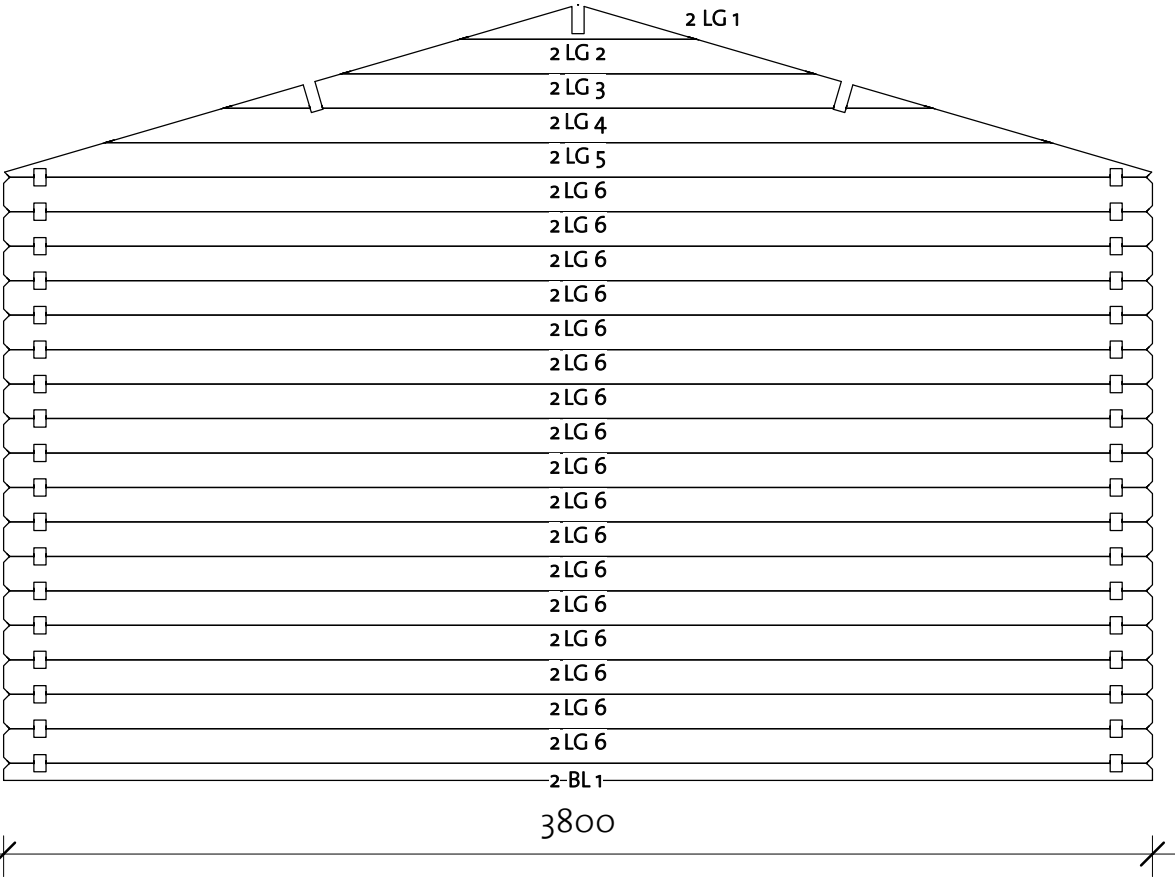


Brantevik I 40 (360x300)

Wall A

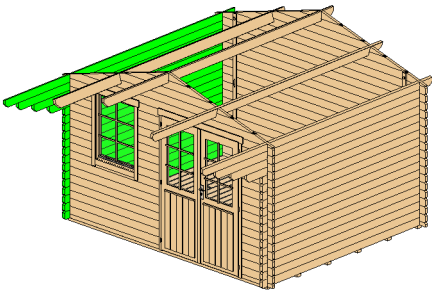

Wall A			
Mark	Profile	Count	Cut Length

ALG 1	40x114	14	3200
ALG 2	40x114	1	3500
ALG 3	40x114	1	3800
ALG 4	40x114	1	4100
ATL 1	40x114	1	4450

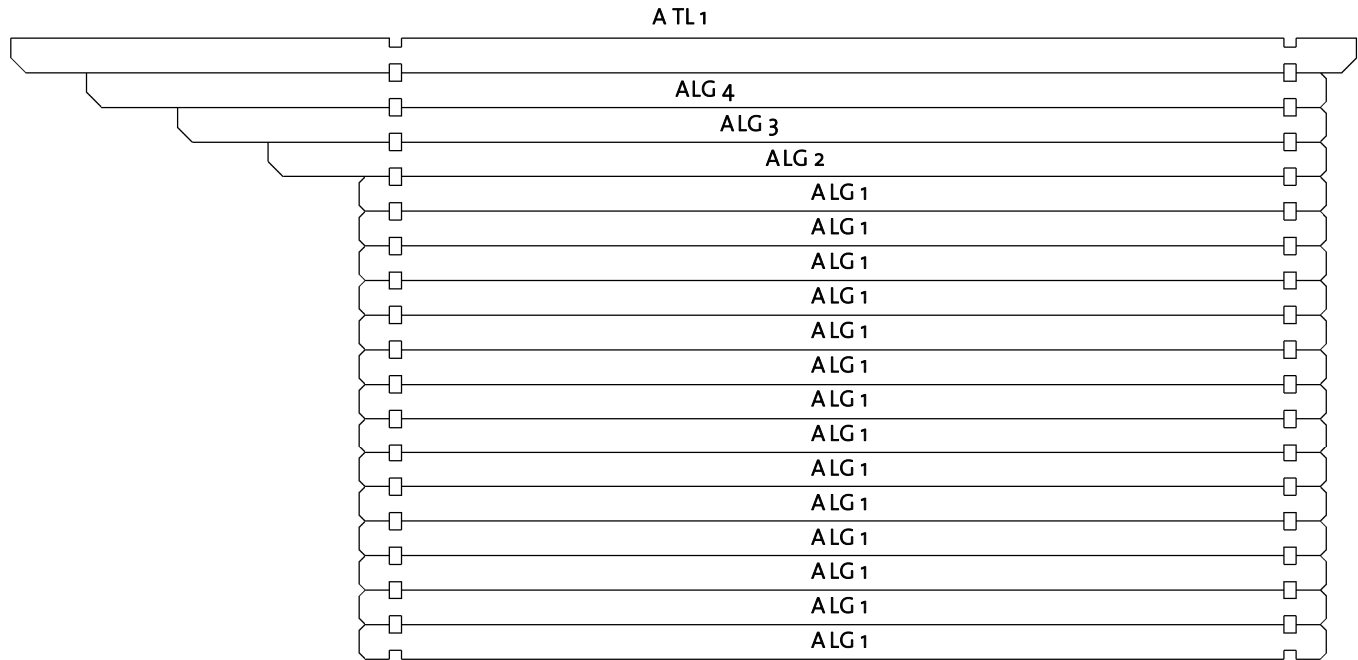


Log Profile Wall A	
Profile	Profile

40x114	
40x114	


Brantevik I 40 (360x300)

Wall B

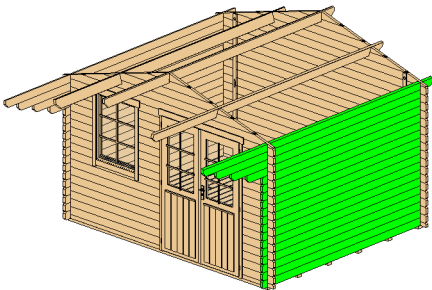

Wall B			
Mark	Profile	Count	Cut Length

BLG 1	40x114	14	3200
BLG 2	40x114	1	3500
BLG 3	40x114	1	3800
BLG 4	40x114	1	4100
BTL 1	40x114	1	4450

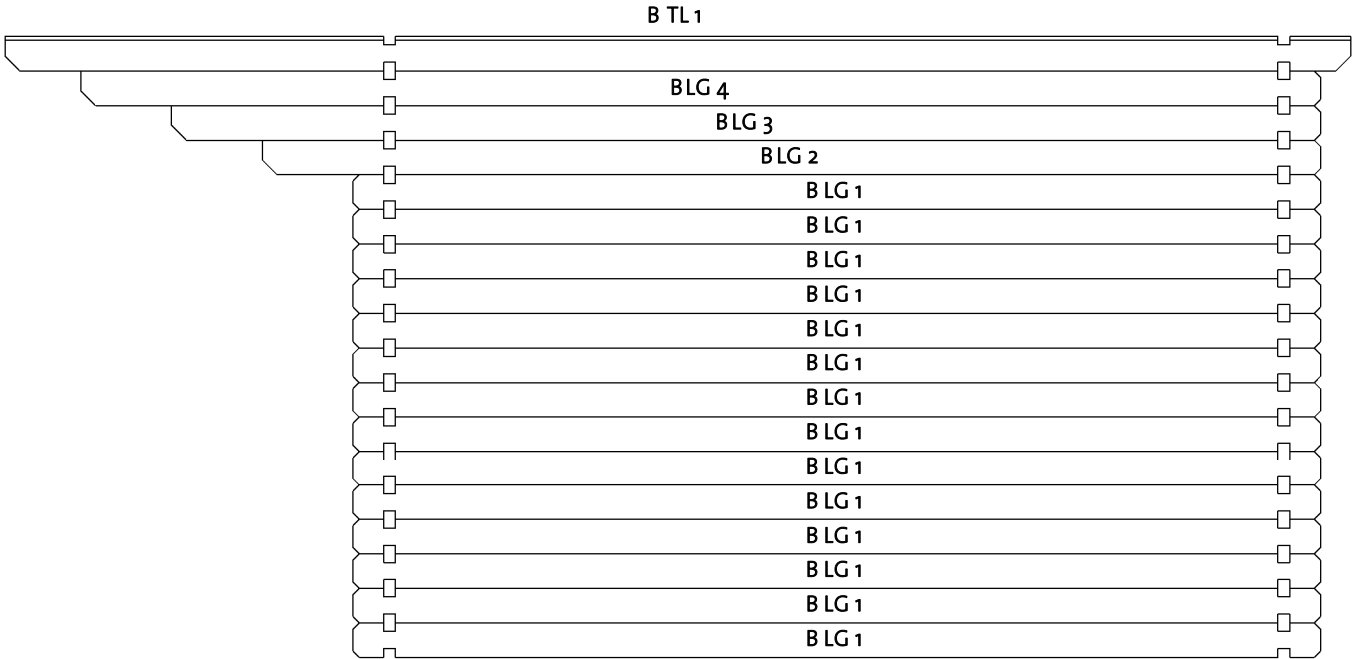


Log Profile Wall B	
Profile	Profile

40x114	
40x114	

Brantevik I 40 (360x300)





Roof 1

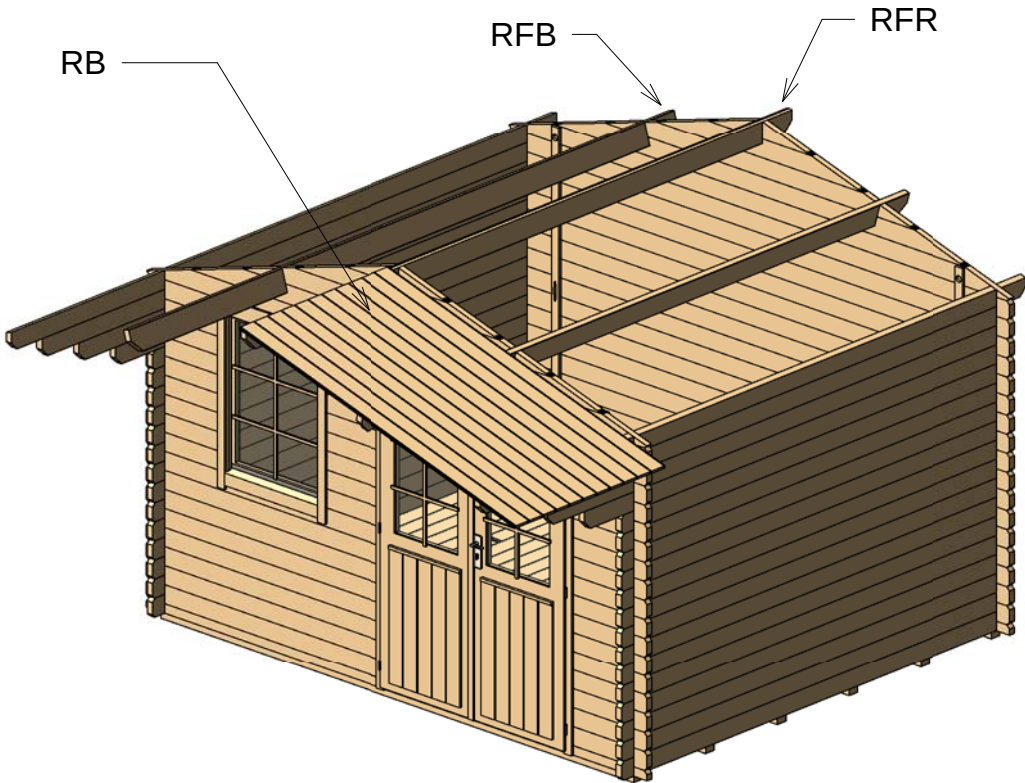

Roof				
Mark	Type	Profile	Count	Length
RFR	Ridge 40x143		1	4450
RFB	Beam 40x143		2	4450
RB	Roofboard 17x114		84	2183

Brantevik I 40 (360x300)


Roof 2

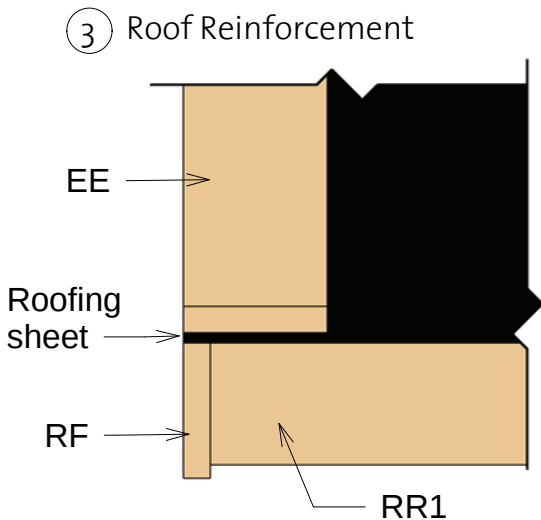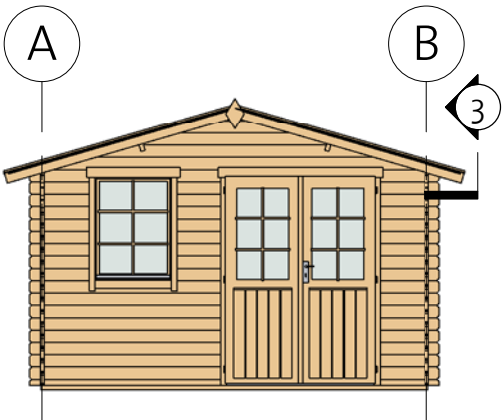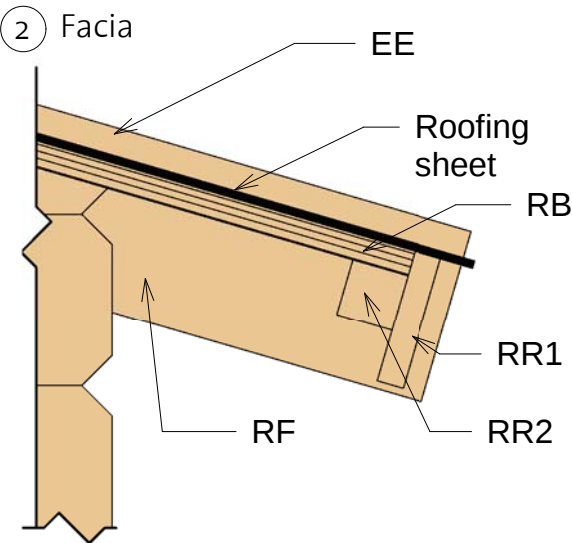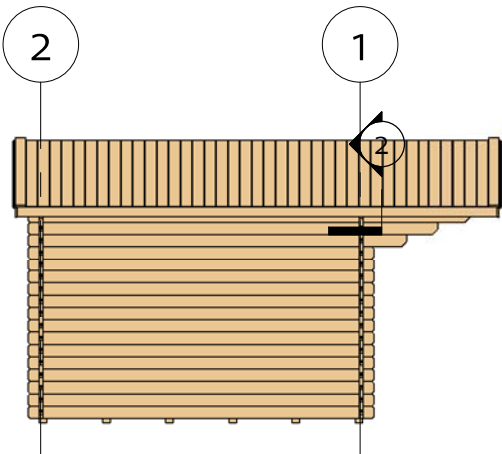


Fascia Schedule				
Mark	Type	Profile	Count	Length
EE	Eave Edging 18x95		4	2220
RF	Roof Fascia 18x95		4	2220
RR1	Roof reinforcement 18x95		2	4450
RR2	Roof reinforcement 38x38		2	4450

Brantevik I 40 (360x300)

Extras

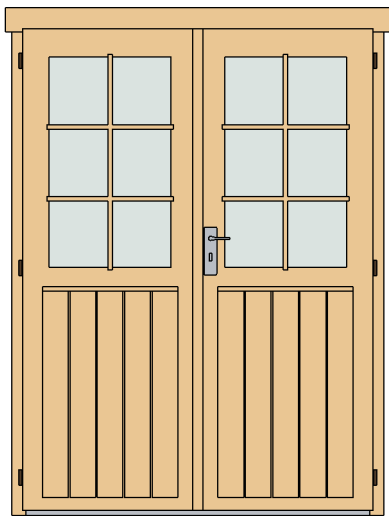


Door Schedule				
Model	Type	Width	Height	Count
CDD1R	Classic double door 1 right	1425	1955	1
DCB6	Door crossbar 6	--	--	2



Window Schedule				
Model	Type	Width	Height	Count
CW1R	Classic window 1 right	765	990	1
WCB6	Window crossbar 6	--	--	1

Fasteners & Extras		
Name	Type	Count

Hitblock	300-400 mm	
Bolts	M8 x 70	12
Screws	5,0 x 70	15
Screws	6,0 x 140	30
Nails	1,4 x 40	30
Screws	4,0 x 40	565



Type	Count	Length
Windboard 18x40	4	2200



Family	Count
Romb	2

Brantevik I 40 (360x300)

List of all items 1

Impregnated foundation beams

Mark	Type	Profile	Count	Length
------	------	---------	-------	--------

IFB	IFB 40x70		6	3590
-----	--------------	---	---	------

Floor Schedule

Mark	Type	Profile	Count	Length
------	------	---------	-------	--------

FB	FB 17x114		33	2915
----	-----------	---	----	------

BB1	BB 20x40		2	3600
BB2	BB 20x40		2	3000

Roof

Mark	Type	Profile	Count	Length
------	------	---------	-------	--------

RFR	Ridge 40x143		1	4450
RFB	Beam 40x143		2	4450
RB	Roofboard 17x114		84	2183

Fascia Schedule

Mark	Type	Profile	Count	Length
------	------	---------	-------	--------

EE	Eave Edging 18x95		4	2220
RF	Roof Fascia 18x95		4	2220
RR1	Roof reinforcement 18x95		2	4450
RR2	Roof reinforcement 38x38		2	4450

Brantevik I 40 (360x300)

List of all items 2

Wall 1			
Mark	Profile	Count	Cut Length

1BL 1	40x57	1	575
1BL 2	40x57	1	1785
1LG 1	40x114	9	440
1LG 2	40x114	26	575
1LG 3*	40x114	1	784
1LG 4*	40x114	1	1566
1LG 5	40x114	8	1785
1LG 6*	40x114	1	2347
1LG 7*	40x114	1	3129
1LG 8*	40x114	1	3794

Wall 2			
Mark	Profile	Count	Cut Length

2BL 1	40x57	1	3800
2LG 1*	40x114	1	784
2LG 2*	40x114	1	1566
2LG 3*	40x114	1	2347
2LG 4*	40x114	1	3129
2LG 5*	40x114	1	3794
2LG 6	40x114	17	3800

*Gable-delivered premounted

Wall A			
Mark	Profile	Count	Cut Length

ALG 1	40x114	14	3200
ALG 2	40x114	1	3500
ALG 3	40x114	1	3800
ALG 4	40x114	1	4100
ATL 1	40x114	1	4450

Wall B			
Mark	Profile	Count	Cut Length

BLG 1	40x114	14	3200
BLG 2	40x114	1	3500
BLG 3	40x114	1	3800
BLG 4	40x114	1	4100
BTL 1	40x114	1	4450

Log Profiles	
Profile	Profile

40x114	
40x57	

Log Profiles	
Profile	Profile

40x114	
--------	---