
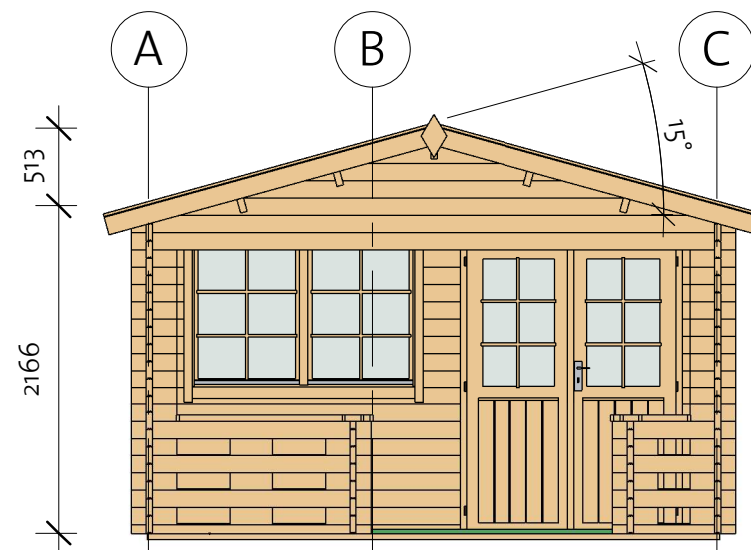



Johnny B 40 (380x480)

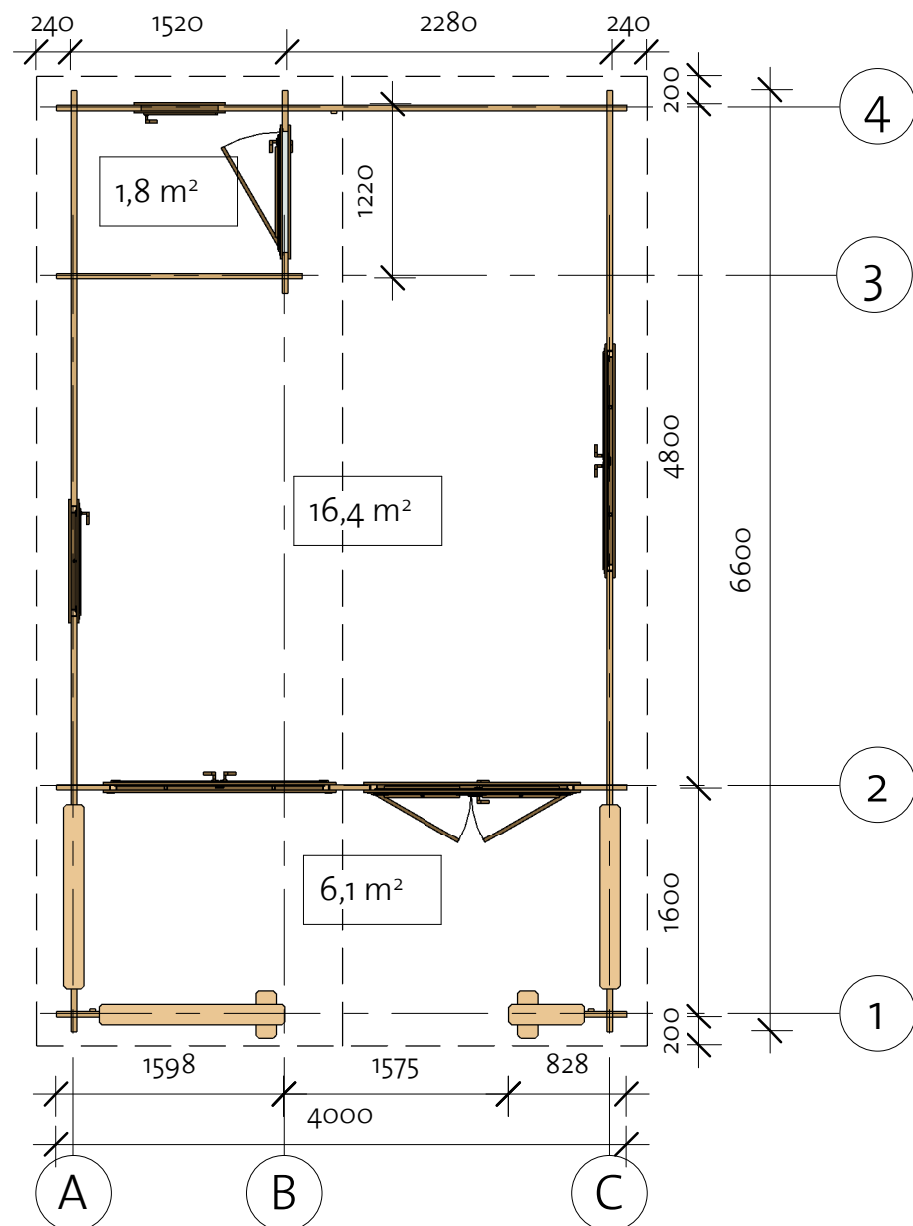

 **VIKTRÄ**

Johnny B 40 (380x480)

Foundation

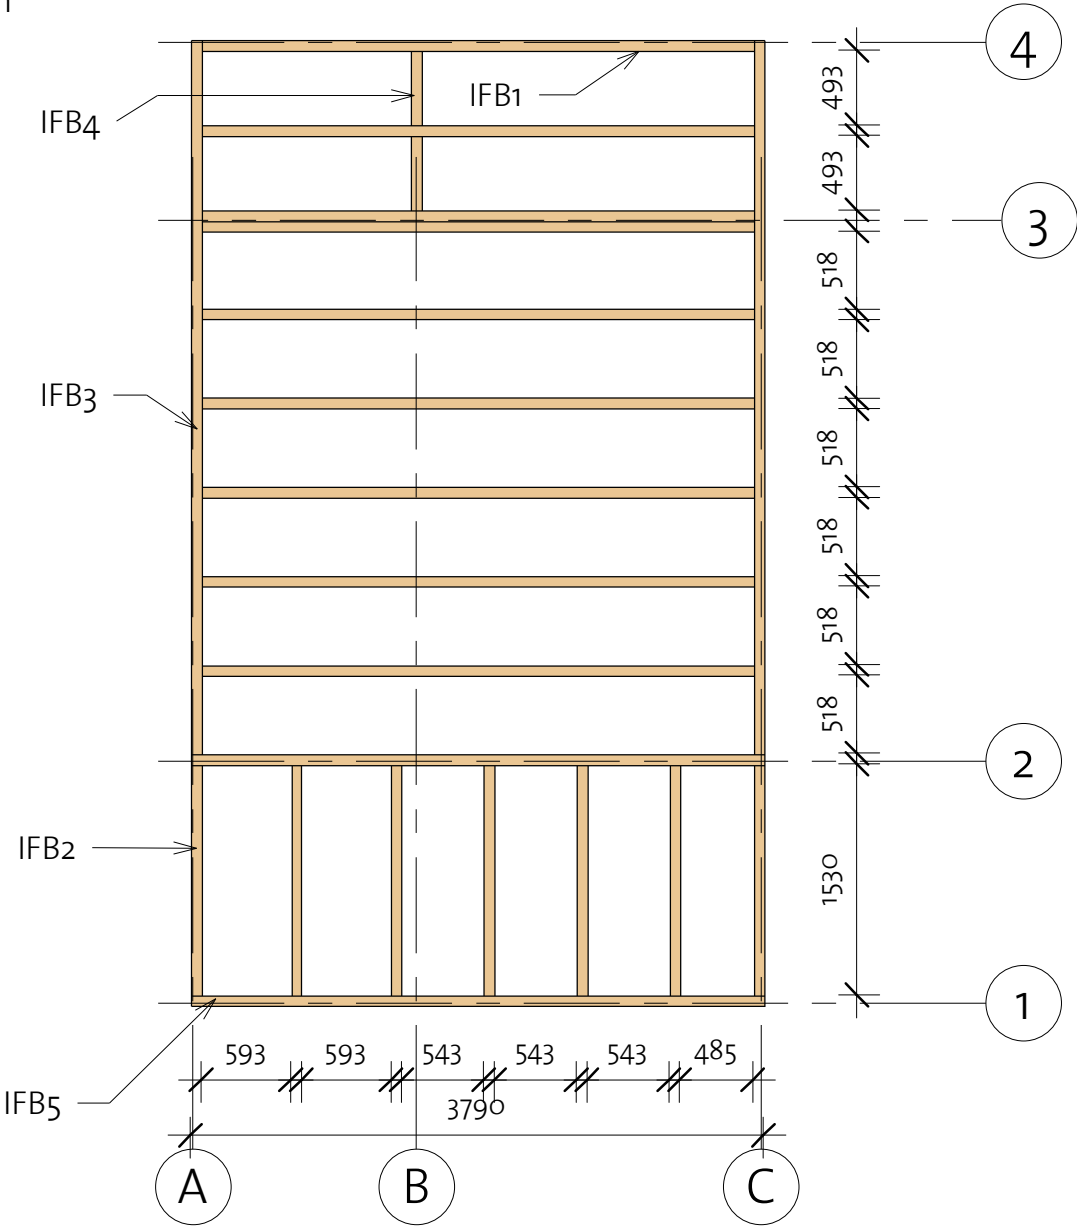

Impregnated foundation beams				
Mark	Type	Profile	Count	Length
IFB1	IFB 70x40		9	3650
IFB2	IFB 70x40		7	1530
IFB3	IFB 70x40		2	4720
IFB4	IFB 70x40		2	493
IFB5	IFB 70x40		2	3790

Johnny B 40 (380x480)

Floor Plan

Floor Schedule

Mark	Type	Profile	Count	Length
------	------	---------	-------	--------

FB1	FB 17x114		14	1134
FB2	FB 17x114		15	3534
FB3	FB 17x114		22	4714



BB1	BB 18x40		2	3800
BB2	BB 18x40		2	3040
BB3	BB 18x40		2	4800

Terrace Schedule

Mark	Type	Profile	Count	Length
------	------	---------	-------	--------



TB	TB 28x120		13	3714
----	-----------	---	----	------

1 Baseboard

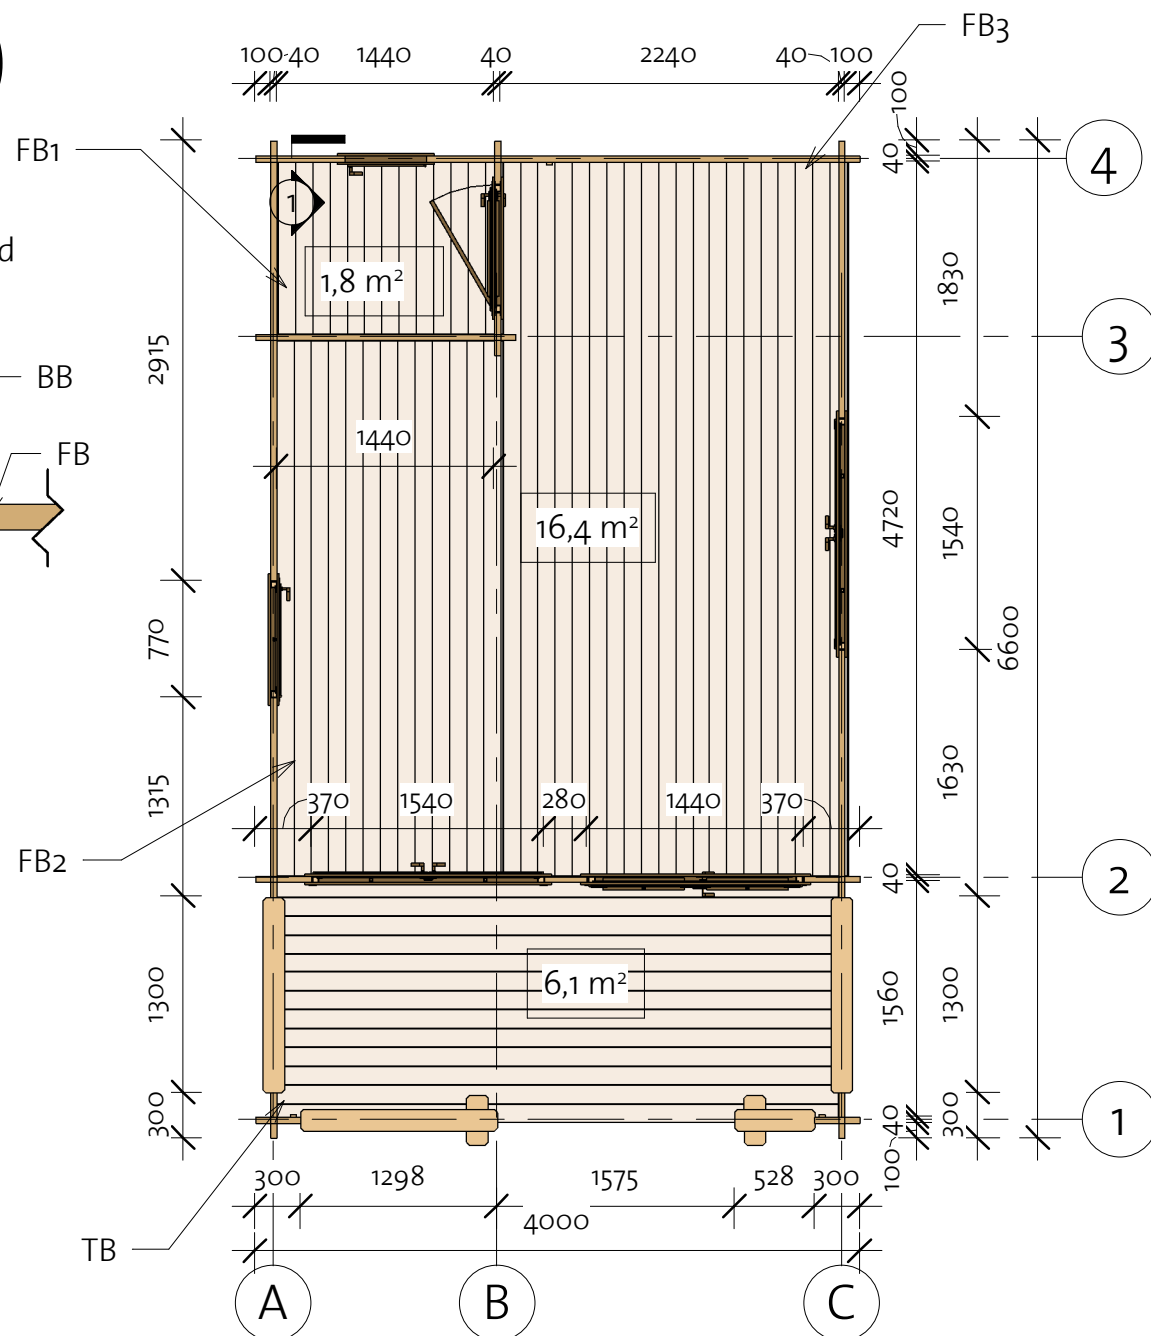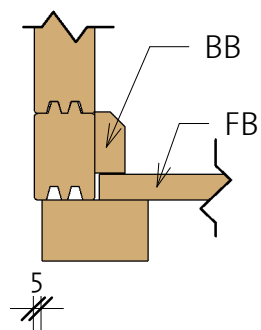

Johnny B 40 (380x480)

Wall 1

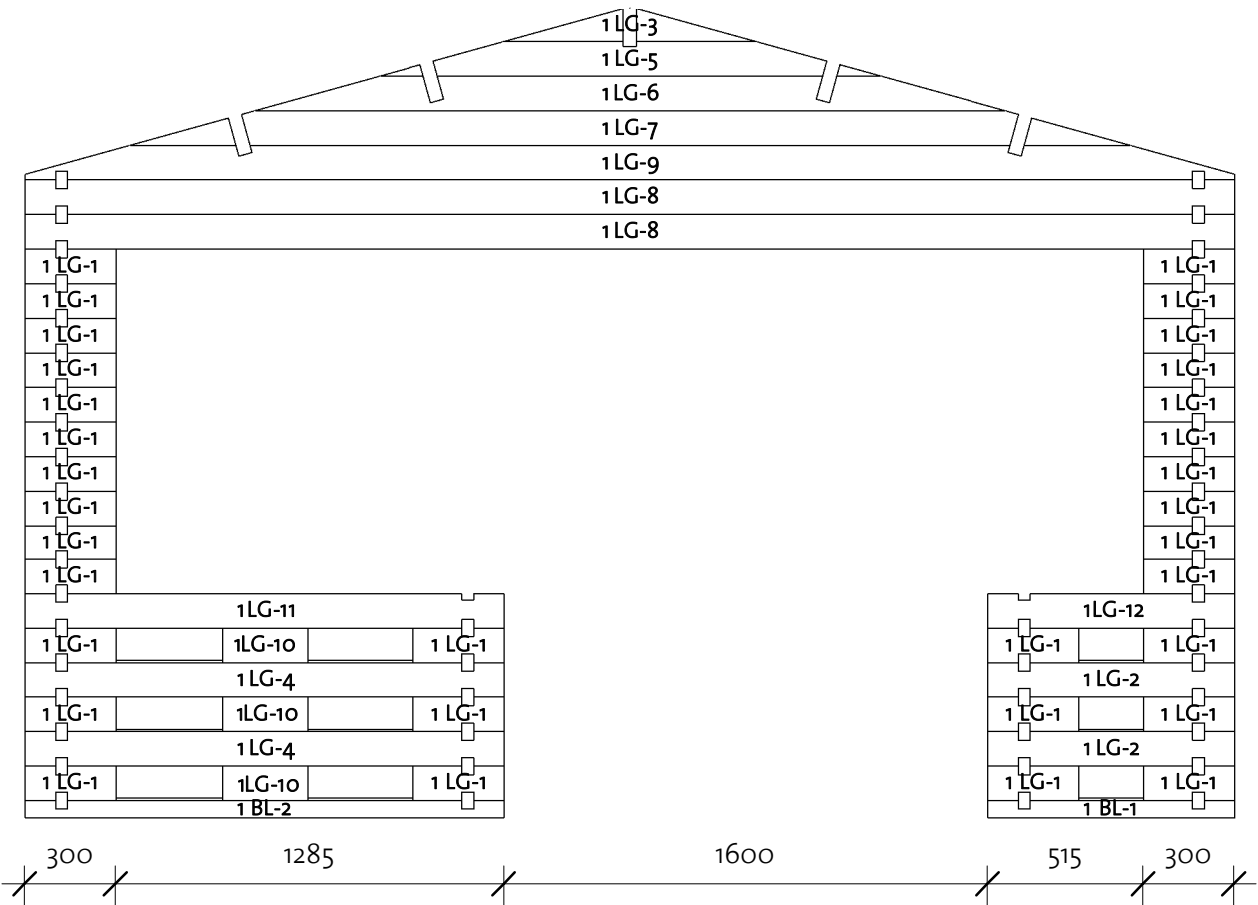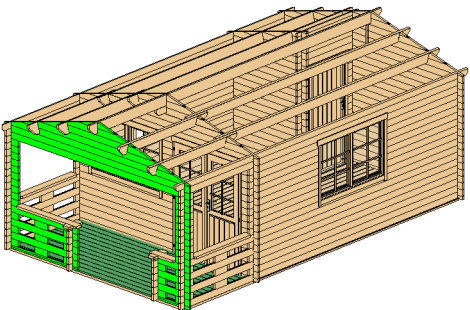

Wall 1			
Mark	Profile	Count	Cut Length

1BL-1	40x57	1	815
1BL-2	40x57	1	1585
1LG-1	40x114	32	300
1LG-2	40x114	2	815
1LG-3 *	40x114	1	828
1LG-4	40x114	2	1585
1LG-5 *	40x114	1	1654
1LG-6 *	40x114	1	2481
1LG-7 *	40x114	1	3307
1LG-8	40x114	2	4000
1LG-9 *	40x114	1	4000
1LG-10	40x114	3	280
1LG-11	40x114	1	1585
1LG-12	40x114	1	815


* Gable - delivered premounted

Log Profile Wall 1	
Profile	Profile

40x57	
40x114	

Johnny B 40 (380x480)

Wall 2

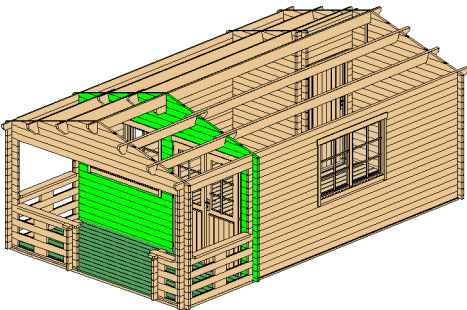


Wall 2			
Mark	Profile	Count	Cut Length

2BL-1	40x57	1	370
2BL-2	40x57	1	2190
2LG-1	40x114	9	280
2LG-2	40x114	26	370
2LG-3*	40x114	1	828
2LG-4*	40x114	1	1654
2LG-5	40x114	8	2190
2LG-6*	40x114	1	2481
2LG-7*	40x114	1	3307
2LG-8	40x114	1	4000
2LG-9*	40x114	1	4000

* Gable - delivered premounted



Log Profile Wall 2	
Profile	Profile

40x57	
40x114	

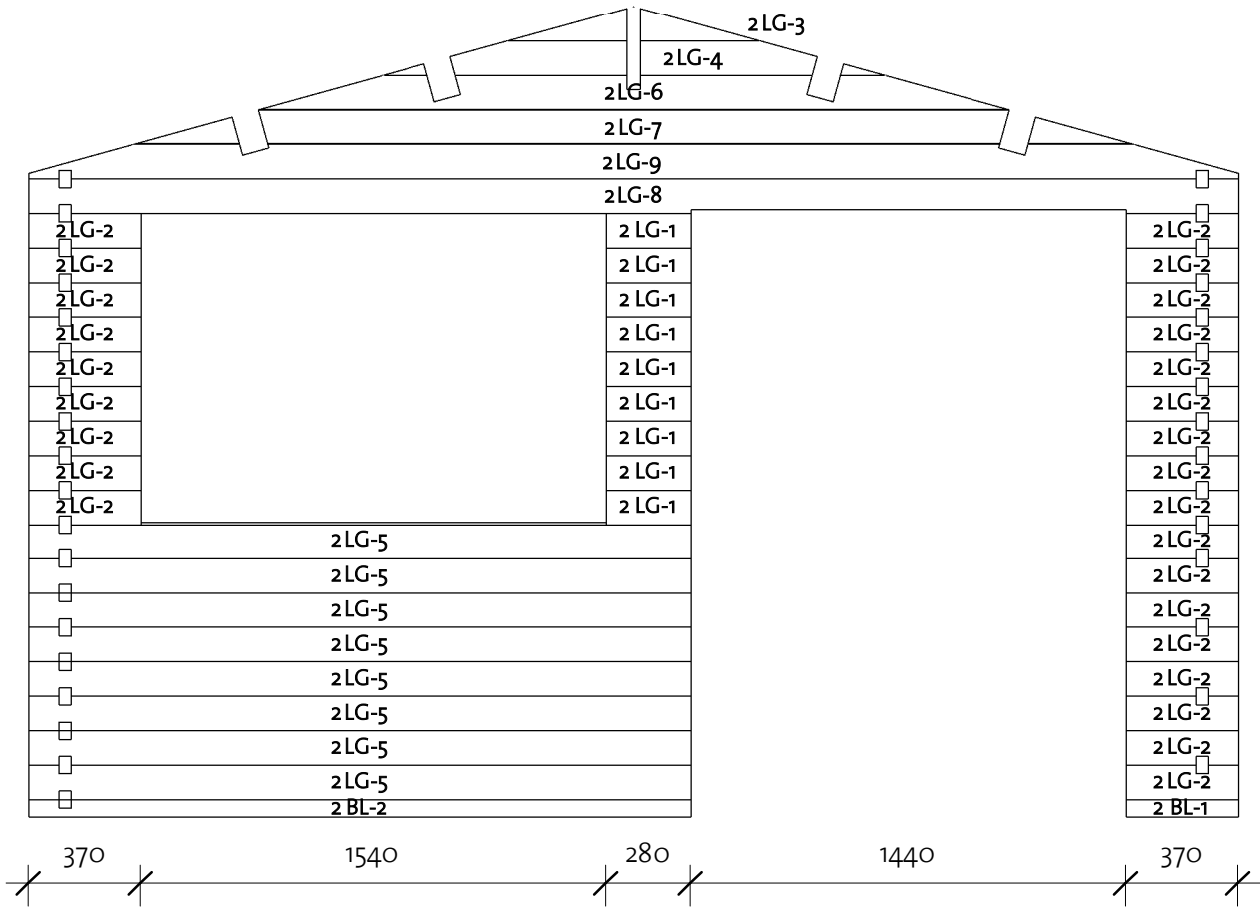

Johnny B 40 (380x480)

Wall 3

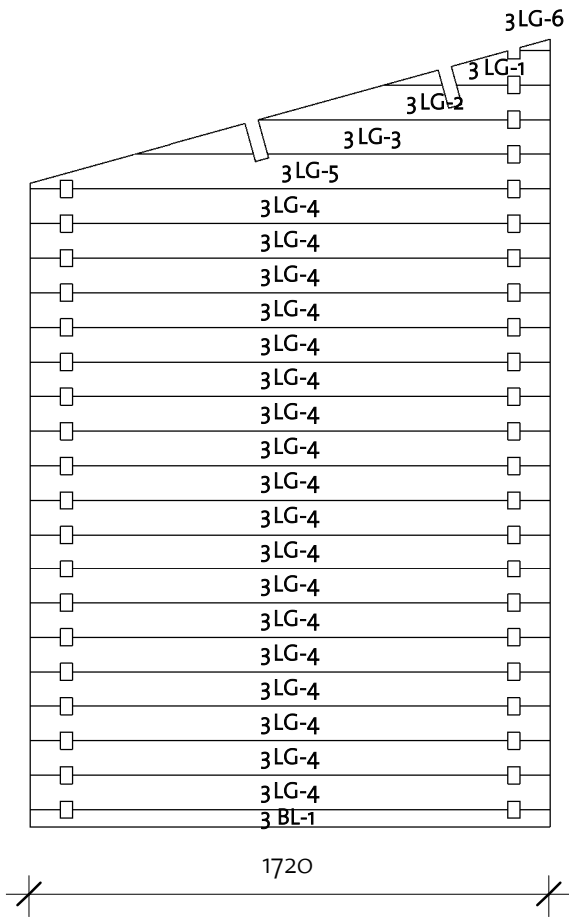
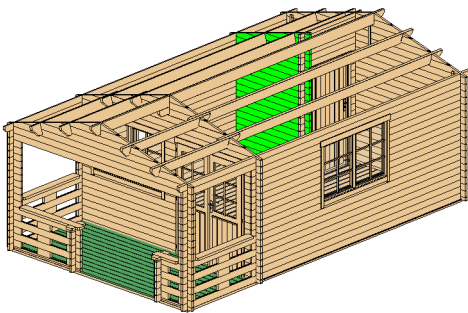


Wall 3			
Mark	Profile	Count	Cut Length
3BL-1	40x57	1	1720
3LG-1 *	40x114	1	547
3LG-2 *	40x114	1	960
3LG-3 *	40x114	1	1373
3LG-4	40x114	18	1720
3LG-5 *	40x114	1	1720
3LG-6 *	40x114	1	100

* Gable - delivered premounted

Log Profile Wall 3	
Profile	Profile
40x57	
40x114	

Wall 4

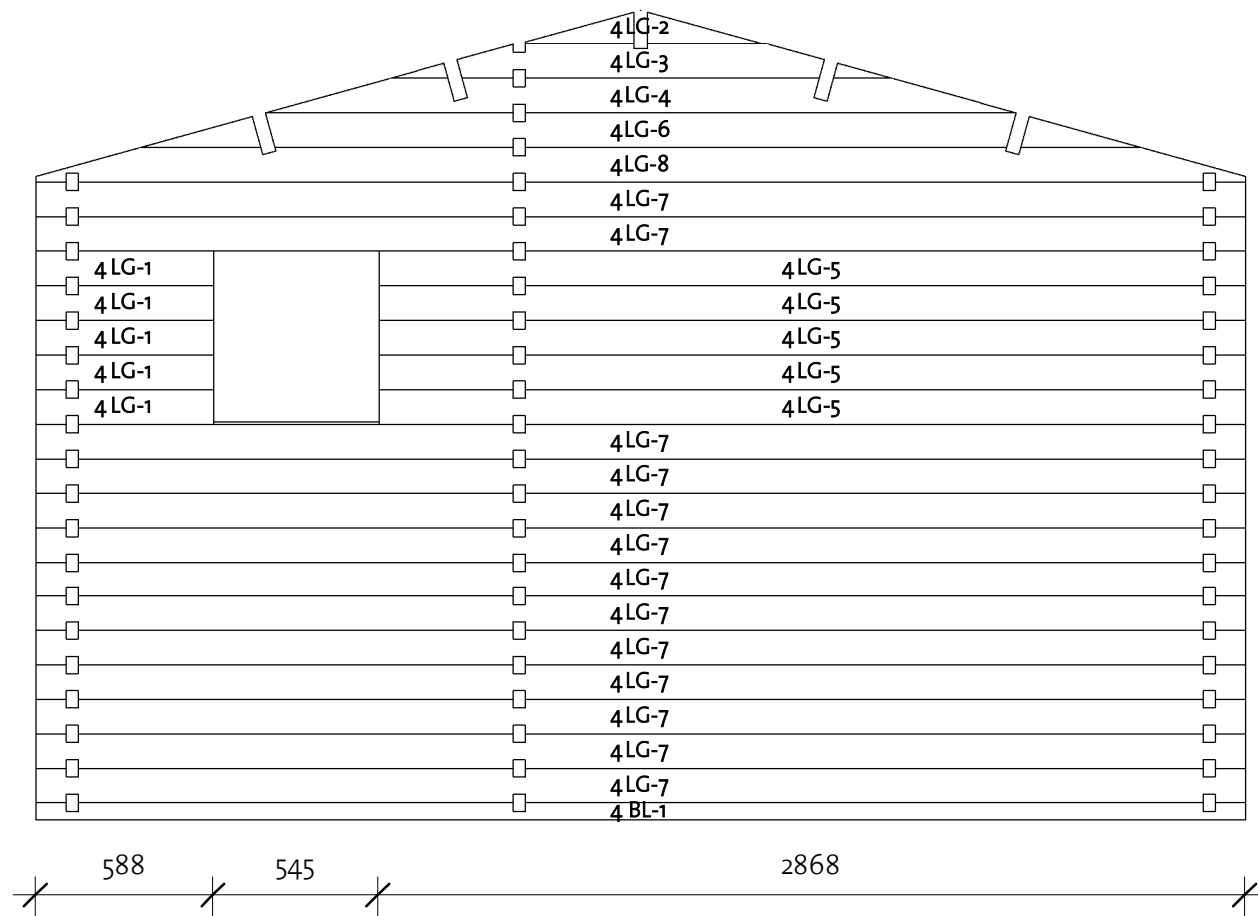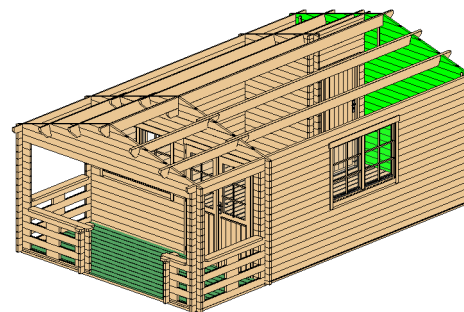

Wall 4			
Mark	Profile	Count	Cut Length

4BL-1	40x57	1	4000
4LG-1	40x114	5	588
4LG-2*	40x114	1	794
4LG-3*	40x114	1	1654
4LG-4*	40x114	1	2481
4LG-5	40x114	5	2868
4LG-6*	40x114	1	3307
4LG-7	40x114	13	4000
4LG-8*	40x114	1	4000


* Gable - delivered premounted

Log Profile Wall 4	
Profile	Profile

40x57	
40x114	

Johnny B 40 (380x480)


Wall A

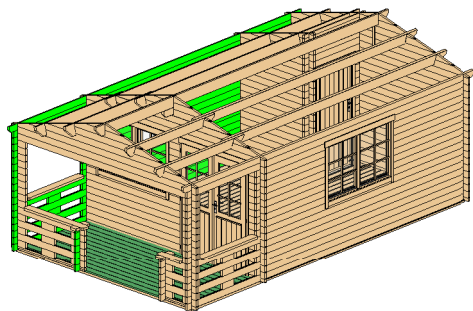

Log Profile Wall A		Log Profile Wall A	
Profile	Profile	Profile	Profile
40X114		40X114	

Wall A			
Mark	Profile	Count	Cut Length
ALG-1	40X114	13	300
ALG-2	40X114	3	280
ALG-3	40X114	8	1315
ALG-4	40X114	9	2915
ALG-5	40X114	4	5000
ALG-6	40X114	5	4880

Wall A			
Mark	Profile	Count	Cut Length
ALG-7	40X114	4	1720
ALG-8	40X114	1	1315
ALG-9	40X114	1	1720
ATL-1	40X114	1	1820
ATL-2	40X114	1	4980

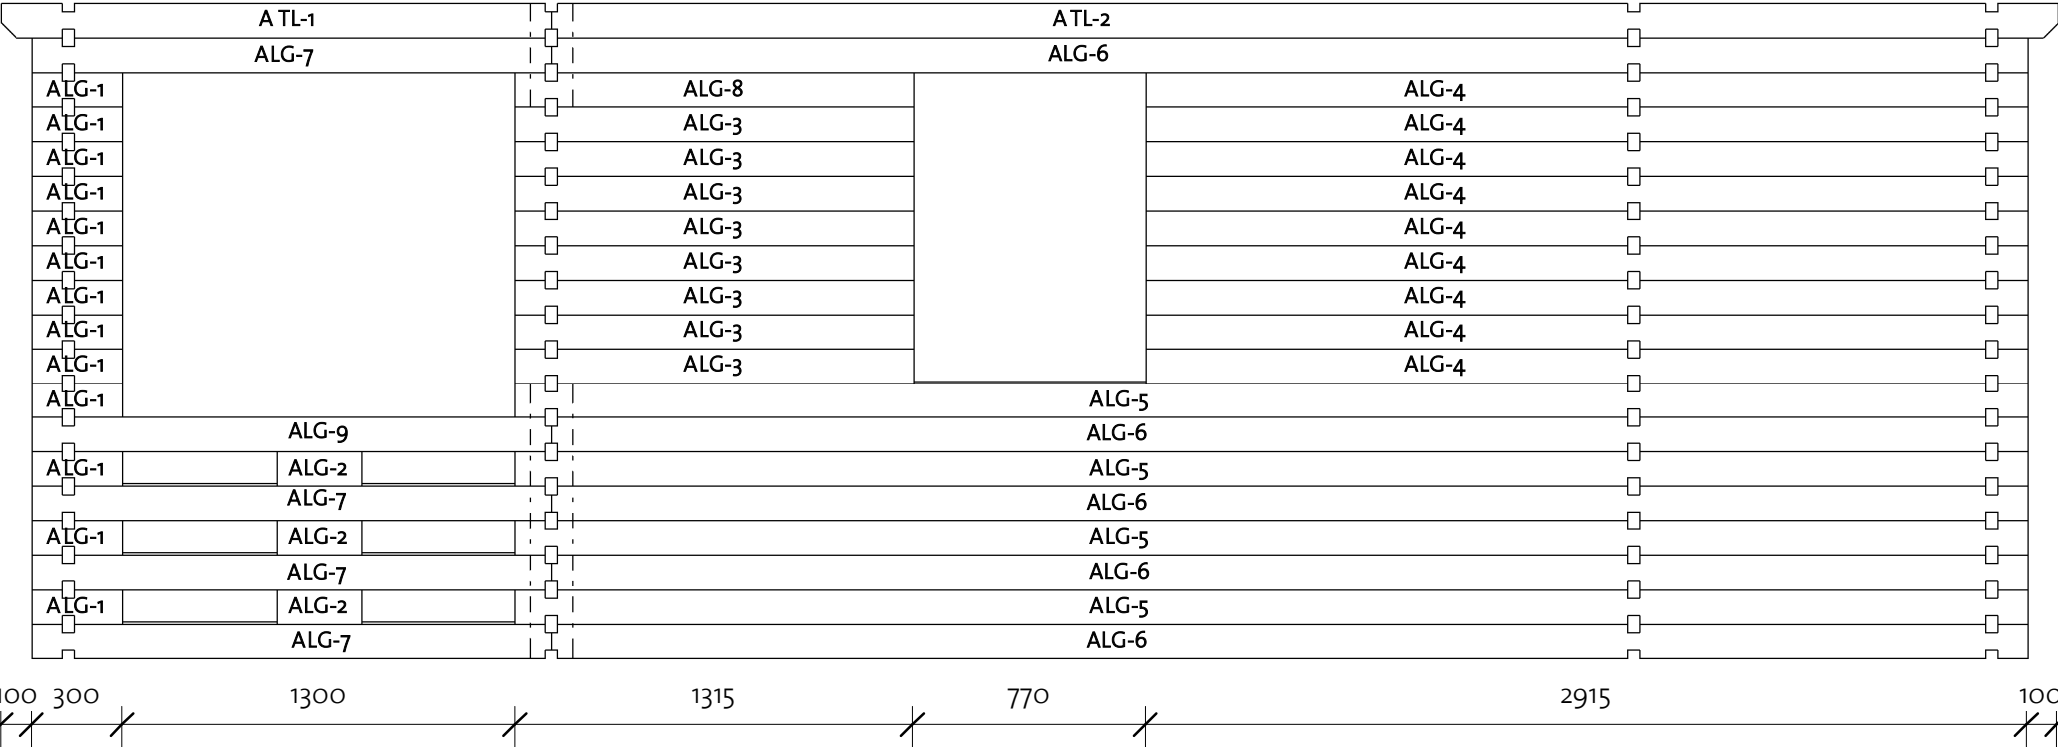

Johnny B 40 (380x480)

Wall B

Wall AB			
Mark	Profile	Count	Cut Length


ABLG-1	40x114	6	240
ABTL-1	40x57	1	240

	ABTL-1
	ABLG-1
	ABLG-1
	ABLG-1
	ABLG-1
	ABLG-1
	ABLG-1
	ABLG-1

Wall BC			
Mark	Profile	Count	Cut Length


BCLG-1	40x114	6	240
BCTL-1	40x57	1	240

	BCTL-1
	BCLG-1
	BCLG-1
	BCLG-1
	BCLG-1
	BCLG-1
	BCLG-1
	BCLG-1

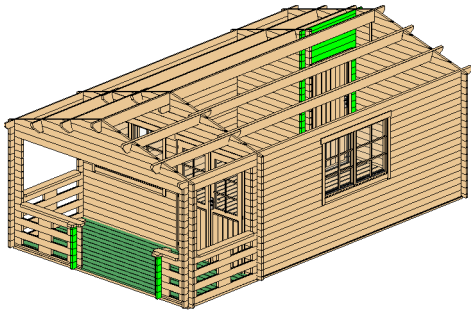

Wall B			
Mark	Profile	Count	Cut Length

BLG-1	40x114	34	285
BLG-2	40x114	4	1420
BLG-3	40x114	1	1420
BTL-1	40x66	1	1420

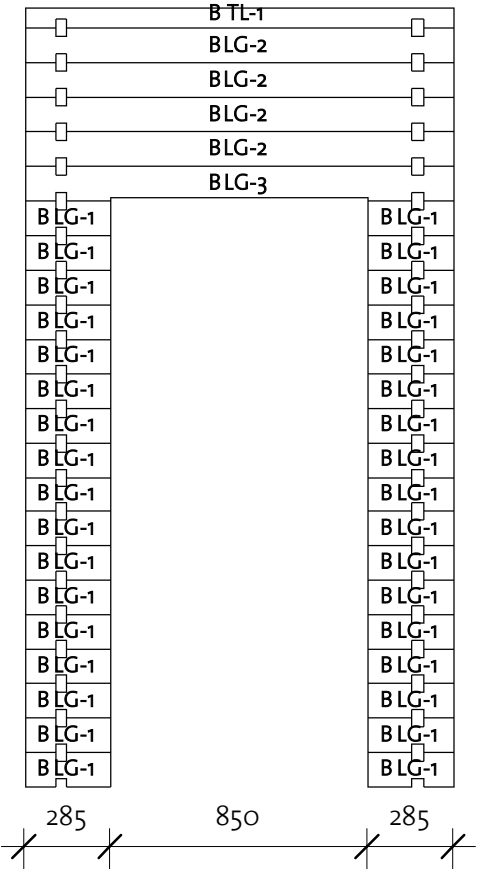


Log Profile Wall B	
Profile	Profile

40x114	
40x66	
40x57	

Johnny B 40 (380x480)

Wall C

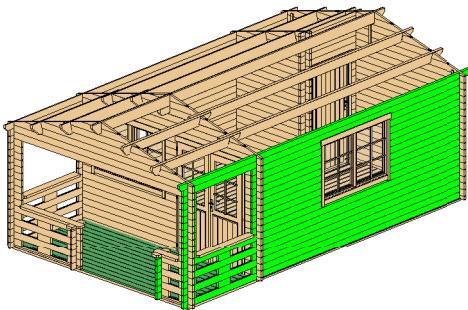

Log Profile Wall C

Profile	Profile
---------	---------

40X114



Log Profile Wall C

Profile	Profile
---------	---------

40X114



Wall C


Mark	Profile	Count	Cut Length
------	---------	-------	------------

CLG-1	40X114	3	280
CLG-2	40X114	13	300
CLG-3	40X114	9	1830
CLG-4	40X114	8	1630
CLG-5	40X114	4	5000
CLG-6	40X114	5	4880

Wall C


Mark	Profile	Count	Cut Length
------	---------	-------	------------

CLG-7	40X114	4	1720
CLG-8	40X114	1	1720
CLG-9	40X114	1	1630
CTL-1	40X114	1	1820
CTL-2	40X114	1	4980

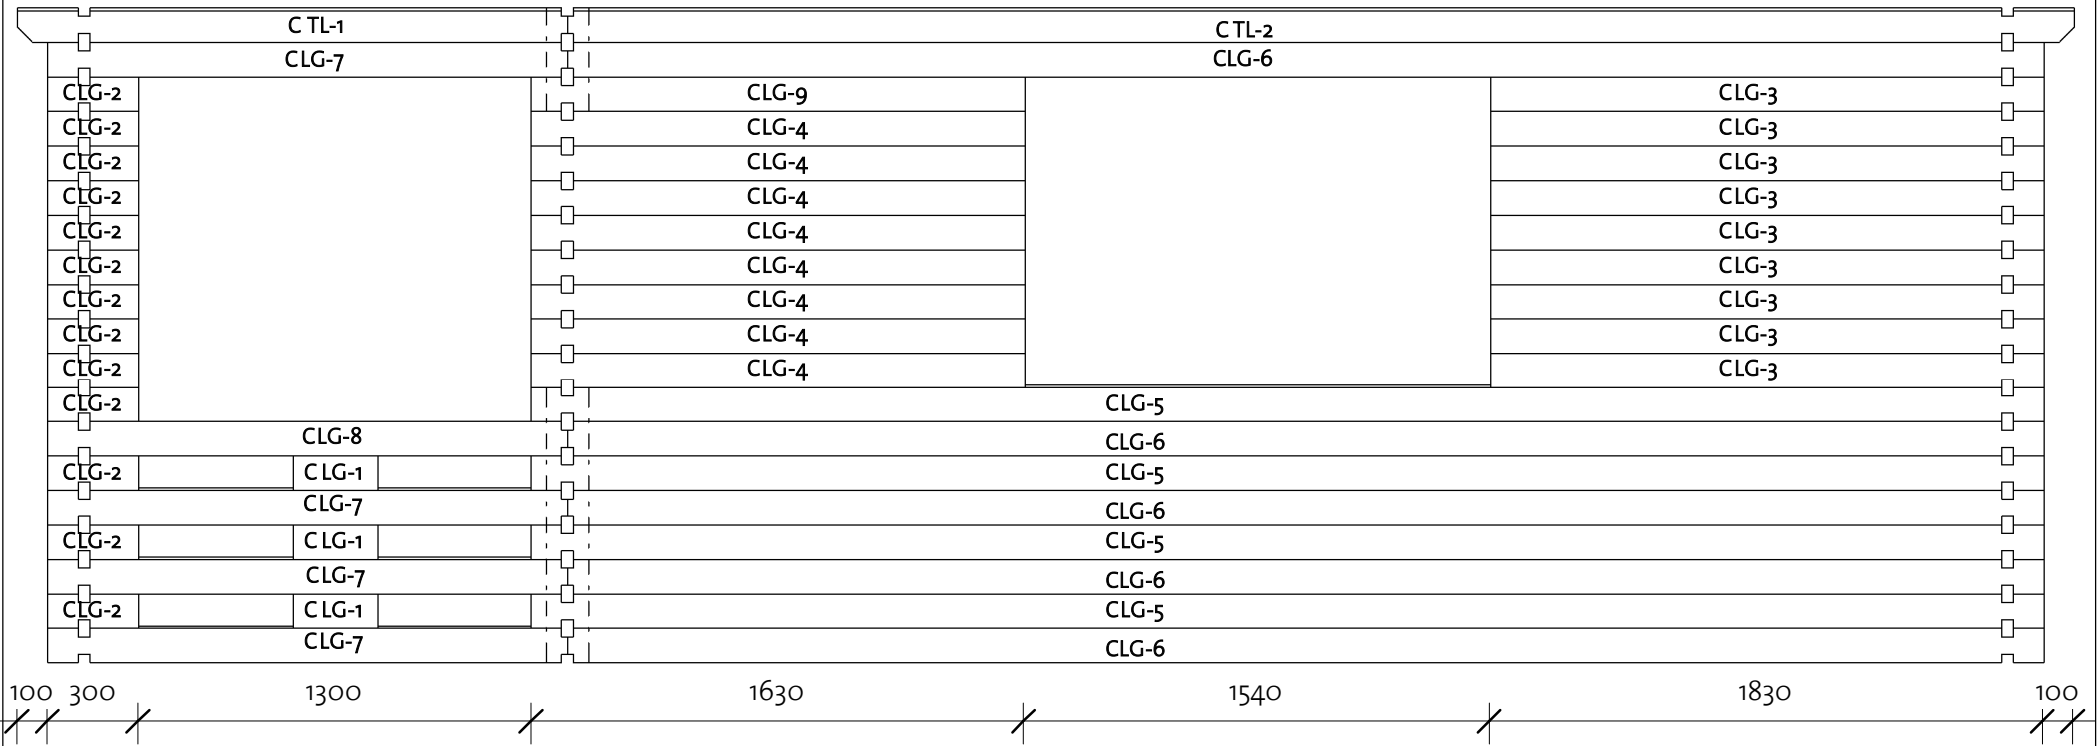

Johnny B 40 (380x480)

Roof 1

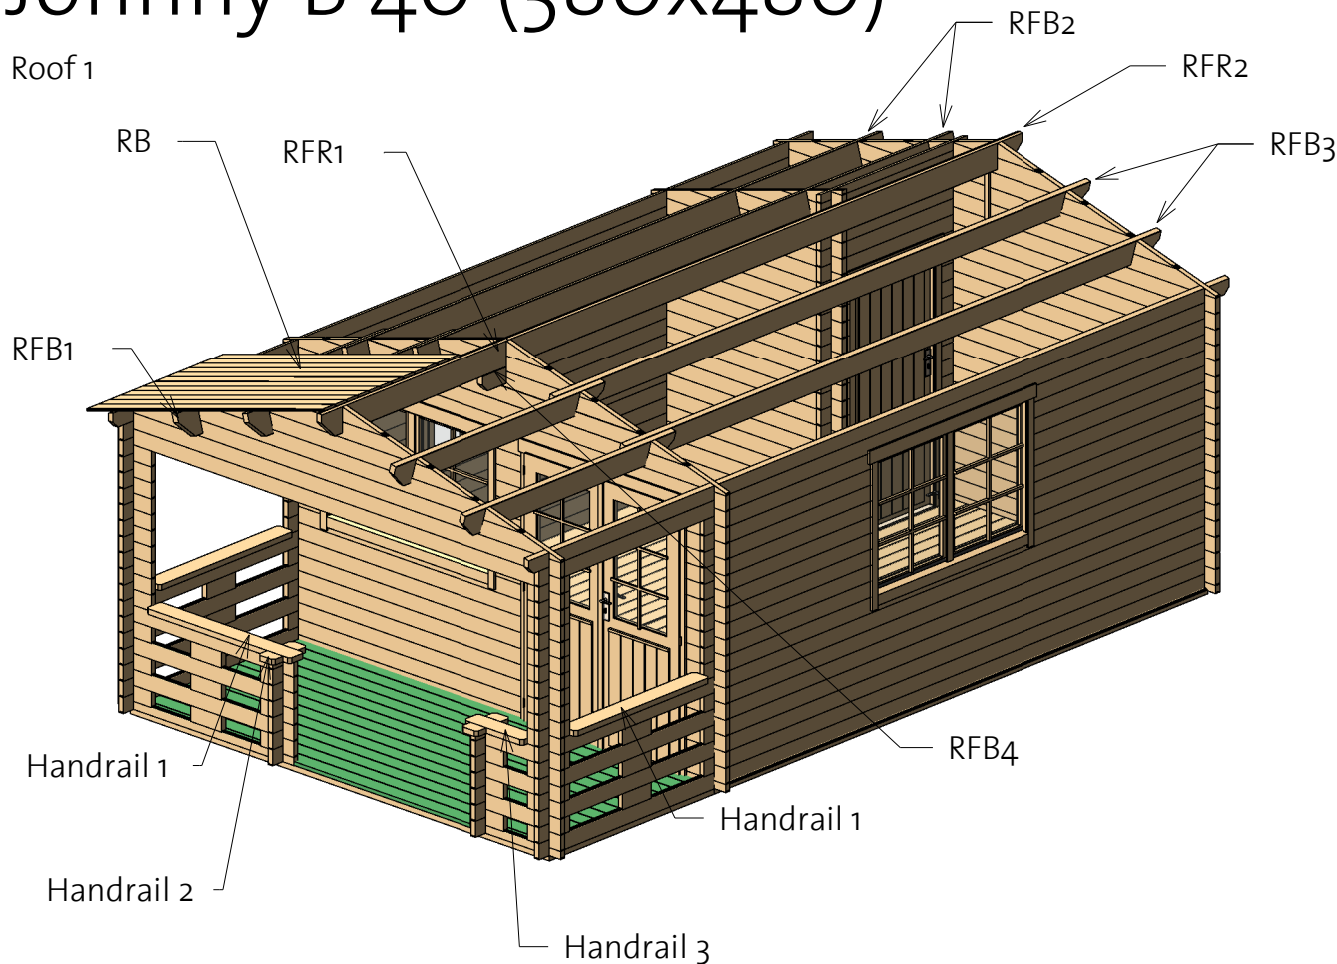

Type	Profile	Count	Length
------	---------	-------	--------


Handrail 1	40x143	3	1300
Handrail 2	40x143	4	94
Handrail 3	40x143	1	530

Roof				
Mark	Type	Profile	Count	Length



RB	17x114		122	2215
RFB1	Beam 45x195		4	2040
RFB2	Beam 45x195		2	5200
RFB3	Beam 45x195		2	5200
RFB4	Beam 45x120		1	500
RFR1	Ridge 45x195		1	1820
RFR2	Ridge 45x195		1	4980

Johnny B 40 (380x480)


Roof 2

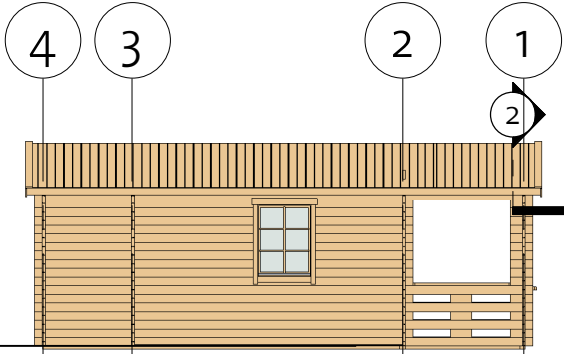

② Facia

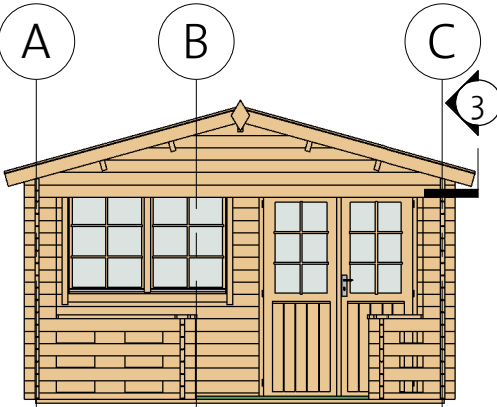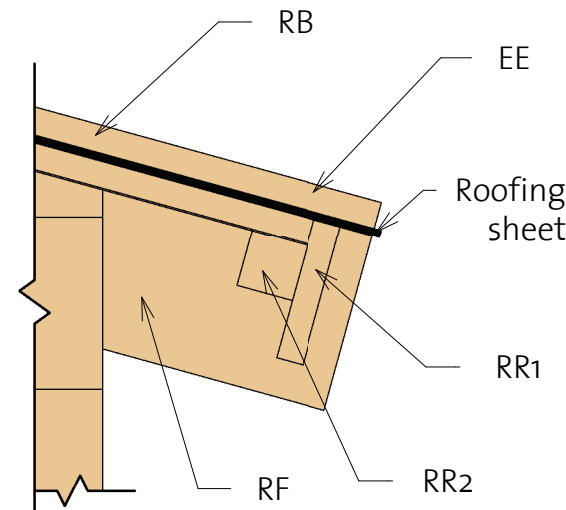

③ Roof Reinforcement

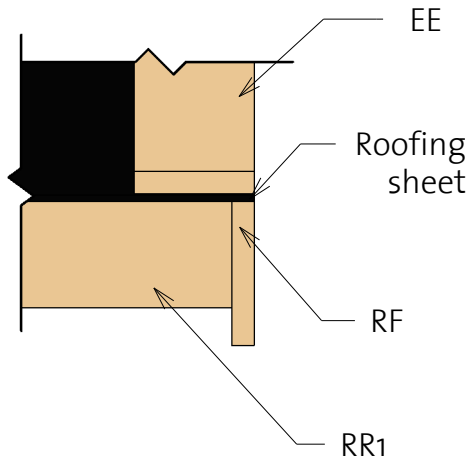


Fascia Schedule

Mark	Type	Profile	Count	Length
EE	Eave Edging 18x95		4	2260
RF	Roof Fascia 18x120		4	2260
RR1	Roof reinforcement 18x95		4	3400
RR2	Roof reinforcement 38x38		4	3400

Johnny B 40 (380x480)

Extras

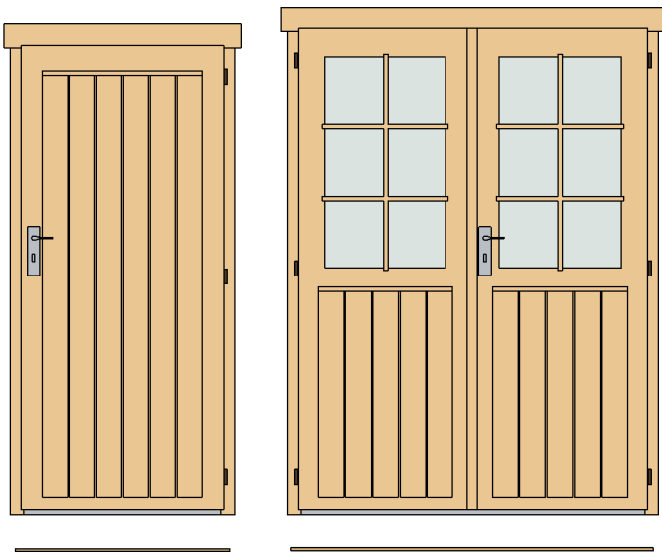

Fasteners/Extras		
Name	Type	Count

Hitblock	300-400 mm	
Bolts	M8x70	20
Screws	5,0 x 70	25
Dowel	16,0 x 150	26
Nails	1,4 x 40	110
Screws	6,0 x 140	170
Screws	4,8 x 70	191
Screws	4,0 x 40	1144

Door Schedule				
Model	Type	Width	Height	Count

CD5R	Classic door 5, wood right	840	1890	1
CDD1R	Classic double door 1 right	1425	1955	1
DCB6	Door Crossbar 6	--	--	2

DB	Door beam 1440 mm	40	12	1
----	-------------------	----	----	---

DB	Door beam 850 mm	40	12	1
----	------------------	----	----	---

Window Schedule				
Mark	Type	Width	Height	Count


CDW1	Classic double window 1	1530	990	2
CW1L	Classic window 1 left	765	990	1
CW12R	Classic window 12, full glass right	540	540	1
WCB6	Windows Crossbar 6	--	--	5

Type	Count	Length
------	-------	--------

Windboard2 18x40	1	600
Windboard 18x40	6	2200

Type	Count
------	-------

Romb	2
------	---

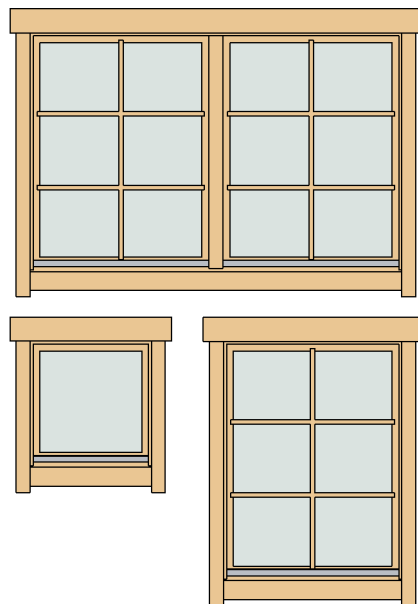

Johnny B 40 (380x480)

List of all items 1

Impregnated foundation beams

Mark	Type	Profile	Count	Length
IFB1	IFB 70x40		9	3650
IFB2	IFB 70x40		7	1530
IFB3	IFB 70x40		2	4720
IFB4	IFB 70x40		2	493
IFB5	IFB 70x40		2	3790

Floor Schedule

Mark	Type	Profile	Count	Length
FB1	FB 17x114		14	1134
FB2	FB 17x114		15	3534
FB3	FB 17x114		22	4714

BB1	BB 18x40		2	3800
BB2	BB 18x40		2	3040
BB3	BB 18x40		2	4800

Terrace Schedule

Mark	Type	Profile	Count	Length
TB	TB 28x120		13	3714

Roof

Mark	Type	Profile	Count	Length
RB	17x114		122	2215
RFB1	Beam 45x195		4	2040
RFB2	Beam 45x195		2	5200
RFB3	Beam 45x195		2	5200
RFB4	Beam 45x120		1	500
RFR1	Ridge 45x195		1	1820
RFR2	Ridge 45x195		1	4980

Type Profile Count Length

Handrail 1	40x143	3	1300
Handrail 2	40x143	4	94
Handrail 3	40x143	1	530

Johnny B 40 (380x480)

List of all items 2

Fascia Schedule				
Mark	Type	Profile	Count	Length
EE	Eave Edging 18x95		4	2260
RF	Roof Fascia 18x120		4	2260
RR1	Roof reinforcement 18x95		4	3400
RR2	Roof reinforcement 38x38		4	3400

Johnny B 40 (380x480)

List of all items 3

Wall 1			
Mark	Profile	Count	Cut Length

1BL-1	40x57	1	815
1BL-2	40x57	1	1585
1LG-1	40x114	32	300
1LG-2	40x114	2	815
1LG-3 *	40x114	1	828
1LG-4	40x114	2	1585
1LG-5 *	40x114	1	1654
1LG-6 *	40x114	1	2481
1LG-7 *	40x114	1	3307
1LG-8	40x114	2	4000
1LG-9 *	40x114	1	4000
1LG-10	40x114	3	280
1LG-11	40x114	1	1585
1LG-12	40x114	1	815

Wall 3			
Mark	Profile	Count	Cut Length

3BL-1	40x57	1	1720
3LG-1 *	40x114	1	547
3LG-2 *	40x114	1	960
3LG-3 *	40x114	1	1373
3LG-4	40x114	18	1720
3LG-5 *	40x114	1	1720
3LG-6 *	40x114	1	100

Wall 2			
Mark	Profile	Count	Cut Length

2BL-1	40x57	1	370
2BL-2	40x57	1	2190
2LG-1	40x114	9	280
2LG-2	40x114	26	370
2LG-3 *	40x114	1	828
2LG-4 *	40x114	1	1654
2LG-5	40x114	8	2190
2LG-6 *	40x114	1	2481
2LG-7 *	40x114	1	3307
2LG-8	40x114	1	4000
2LG-9 *	40x114	1	4000

* Gable - delivered premounted

Wall 4			
Mark	Profile	Count	Cut Length

4BL-1	40x57	1	4000
4LG-1	40x114	5	588
4LG-2 *	40x114	1	794
4LG-3 *	40x114	1	1654
4LG-4 *	40x114	1	2481
4LG-5	40x114	5	2868
4LG-6 *	40x114	1	3307
4LG-7	40x114	13	4000
4LG-8 *	40x114	1	4000

Johnny B 40 (380x480)

List of all items 4

Wall A				Wall A			
Mark	Profile	Count	Cut Length	Mark	Profile	Count	Cut Length

ALG-1	40x114	13	300	ALG-7	40x114	4	1720
ALG-2	40x114	3	280	ALG-8	40x114	1	1315
ALG-3	40x114	8	1315	ALG-9	40x114	1	1720
ALG-4	40x114	9	2915	ATL-1	40x114	1	1820
ALG-5	40x114	4	5000	ATL-2	40x114	1	4980
ALG-6	40x114	5	4880				

Wall B			
Mark	Profile	Count	Cut Length

BLG-1	40x114	34	285
BLG-2	40x114	4	1420
BLG-3	40x114	1	1420
BTL-1	40x66	1	1420

Wall C			
Mark	Profile	Count	Cut Length

CLG-1	40x114	3	280
CLG-2	40x114	13	300
CLG-3	40x114	9	1830
CLG-4	40x114	8	1630
CLG-5	40x114	4	5000
CLG-6	40x114	5	4880

Wall C			
Mark	Profile	Count	Cut Length

CLG-7	40x114	4	1720
CLG-8	40x114	1	1720
CLG-9	40x114	1	1630
CTL-1	40x114	1	1820
CTL-2	40x114	1	4980

Wall BC			
Mark	Profile	Count	Cut Length

BCLG-1	40x114	6	240
BCTL-1	40x57	1	240

Wall AB			
Mark	Profile	Count	Cut Length

ABLG-1	40x114	6	240
ABTL-1	40x57	1	240

Log profiles	
Profile	Profile


40x57	
40x114	
40x57	
40x66	
40x114	
40x114	

Windboard

① Windboard Assembly 1



② Windboard Assembly 2

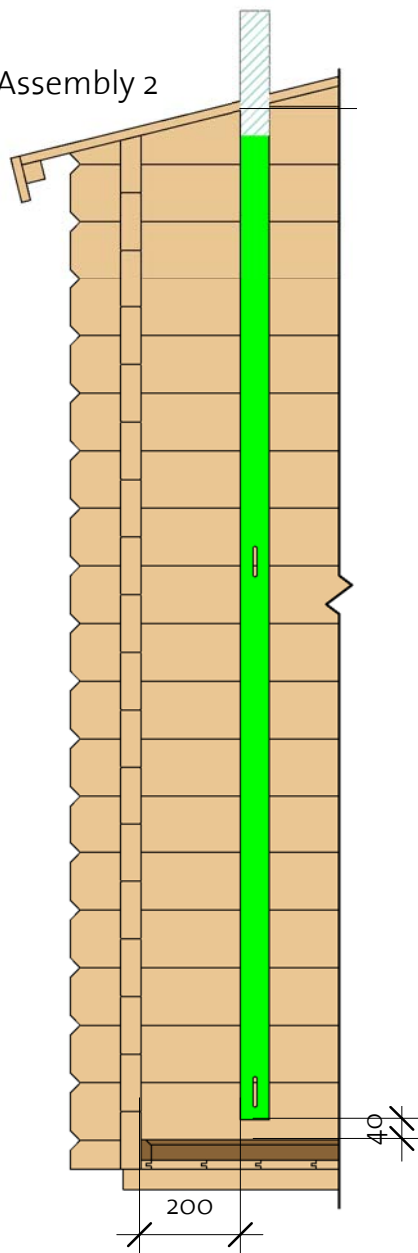

③ Windboard Assembly 3

