
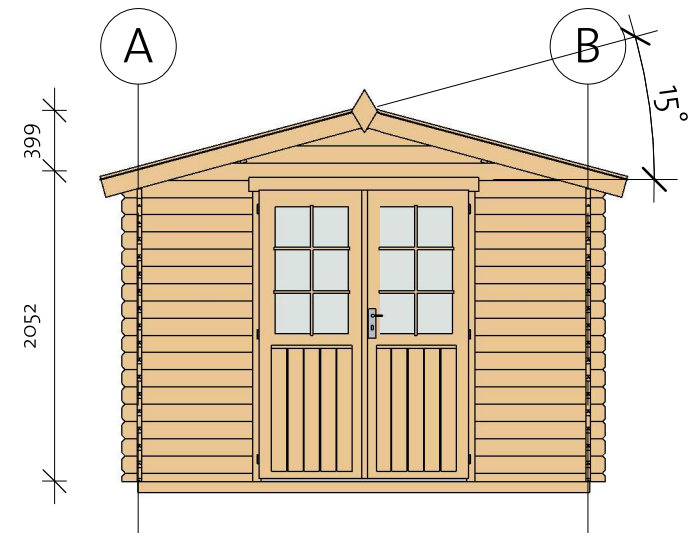



KENLY 28 (3000x2300)

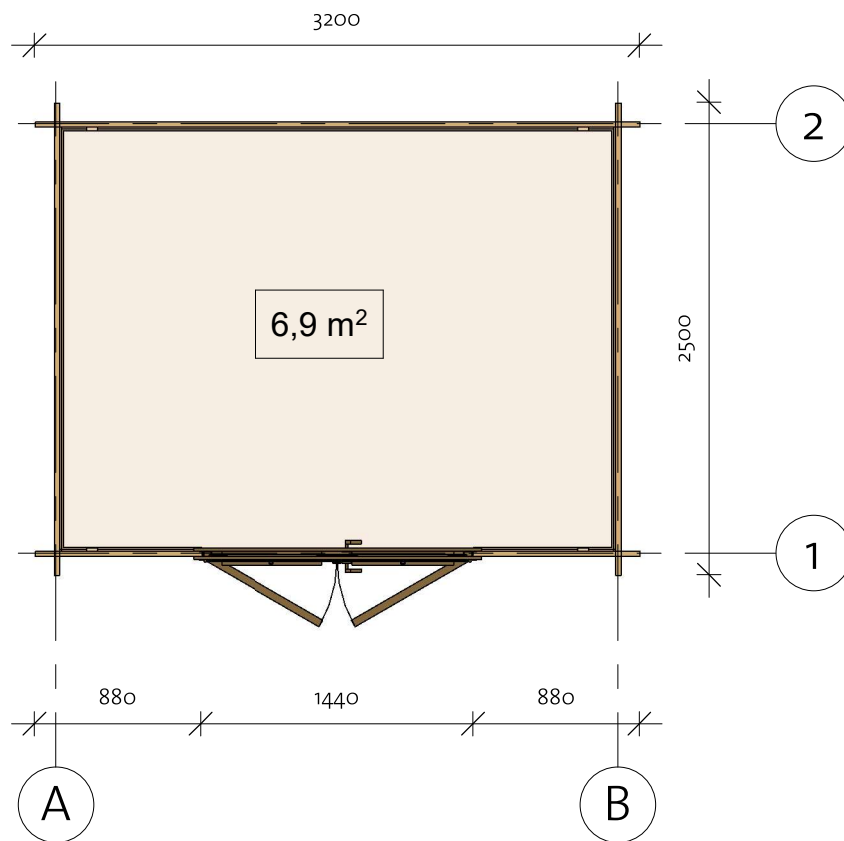

KENLY 28 (300X230)

Foundation


Impregnated foundation beams				
Mark	Type	Profile	Count	Length
IFB	IFB 40x70		5	2990

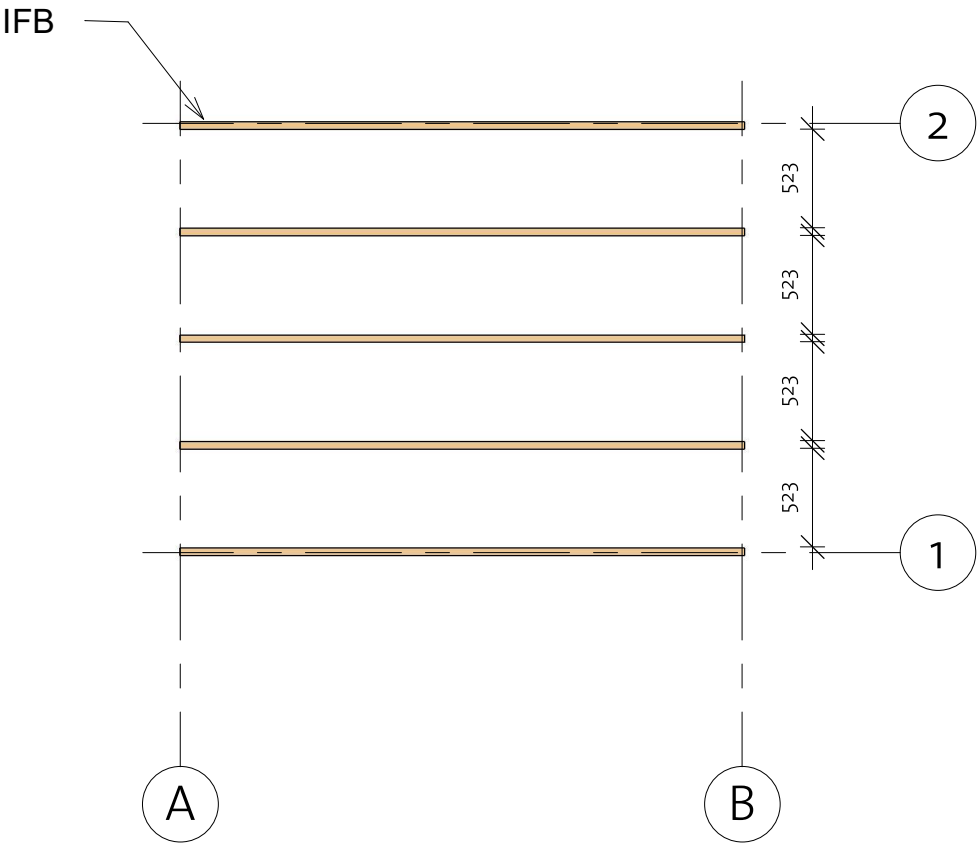


KENLY 28 (300X230)

Floor Plan

① Baseboard


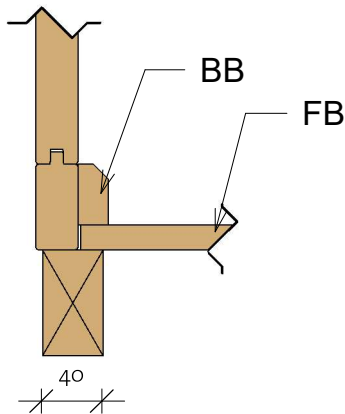


Floor Schedule				
Mark	Type	Profile	Count	Length
FB	FB 17x114		27	2241
BB1	BB 20x40		2	3000
BB2	BB 20x40		2	2300

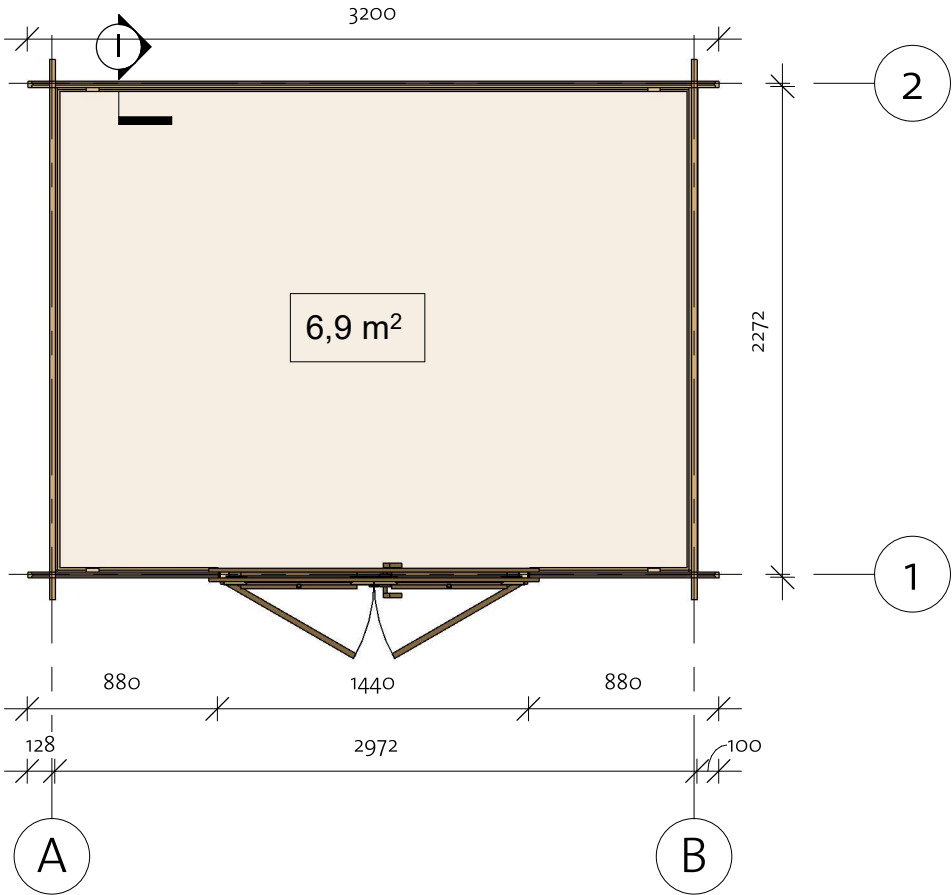

KENLY 28 (300x230)

Wall 1

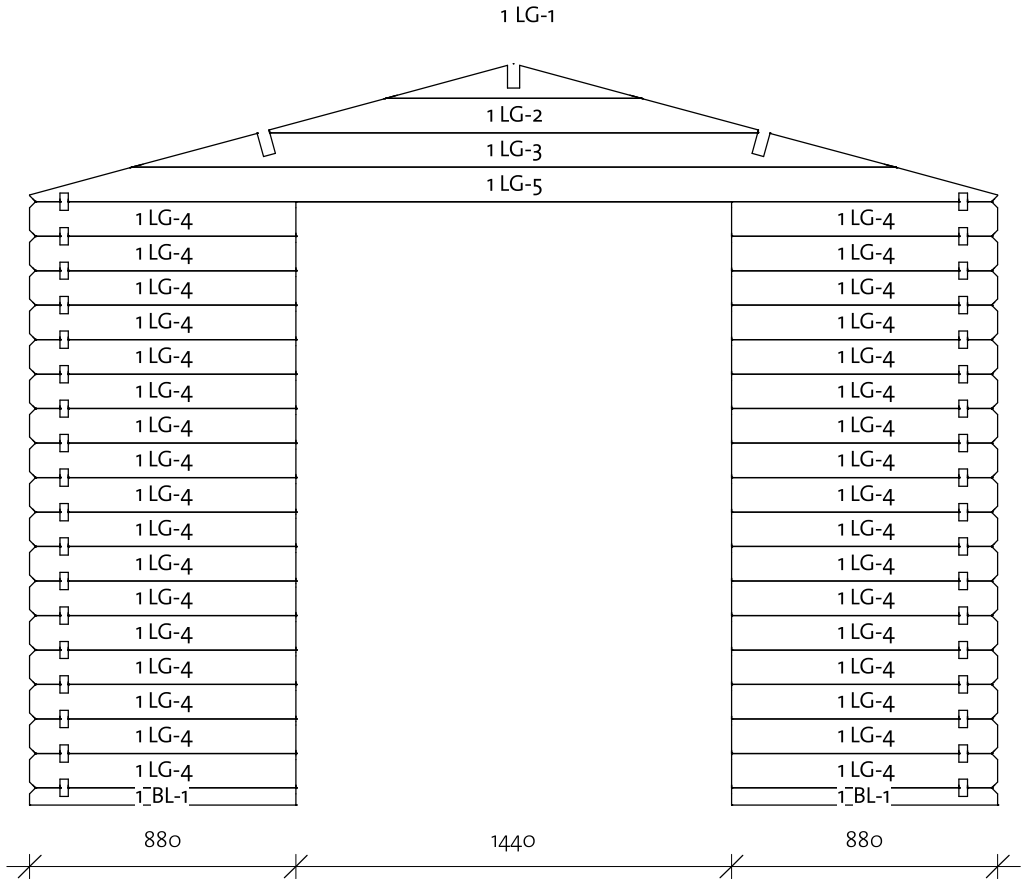

Wall 1			
Mark	Profile	Count	Cut Length

1BL-1	28x57	2	880
1LG-1*	28x114	1	843
1LG-2*	28x114	1	1618
1LG-3*	28x114	1	2524
1LG-4	28x114	34	880
1LG-5*	28x114	1	3200


*Gable-delivered premounted

Log Profile Wall 1	
Profile	Profile

28x57	
28x114	

KENLY 28 (300x230)


Wall 2



Wall 2			
Mark	Profile	Count	Cut Length

2BL-1	28x57	1	3200
2LG-1*	28x114	1	843
2LG-2*	28x114	1	1618
2LG-3*	28x114	1	2524
2LG-4	28x114	17	3200
2LG-5*	28x114	1	3200

*Gable-delivered premounted

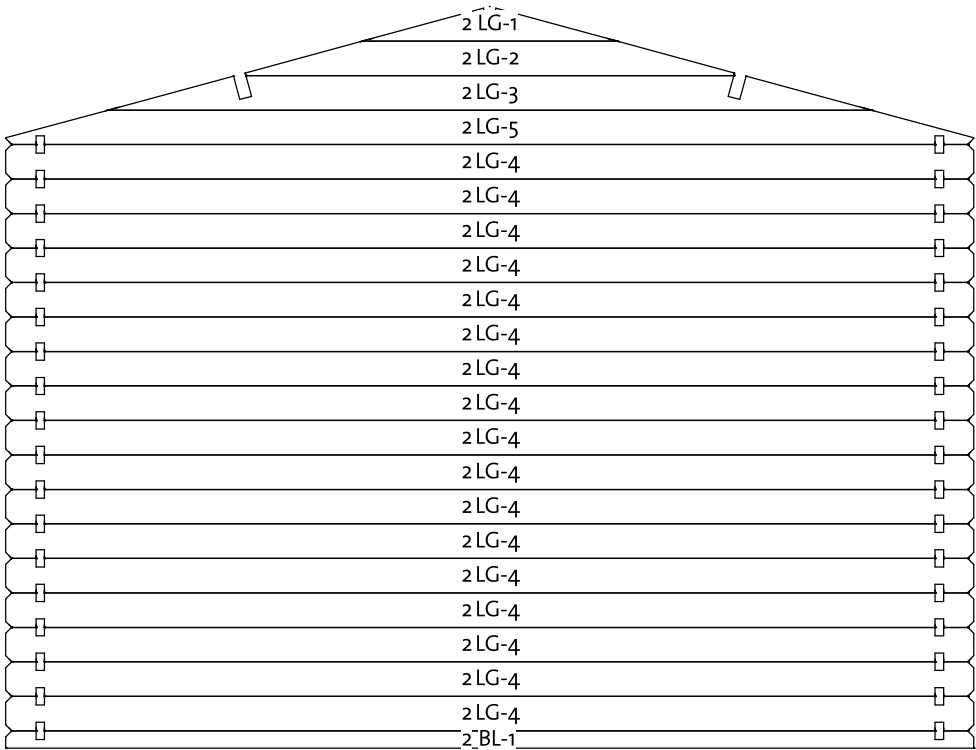


Log Profile Wall 2	
Profile	Profile

28x57	
28x114	


KENLY 28 (300x230)

Wall A



Wall A			
Mark	Profile	Count	Cut Length

ALG-1	28x114	15	2500
ALG-2	28x114	1	2675
ALG-3	28x114	1	2850
ATL-1	28x114	1	3150

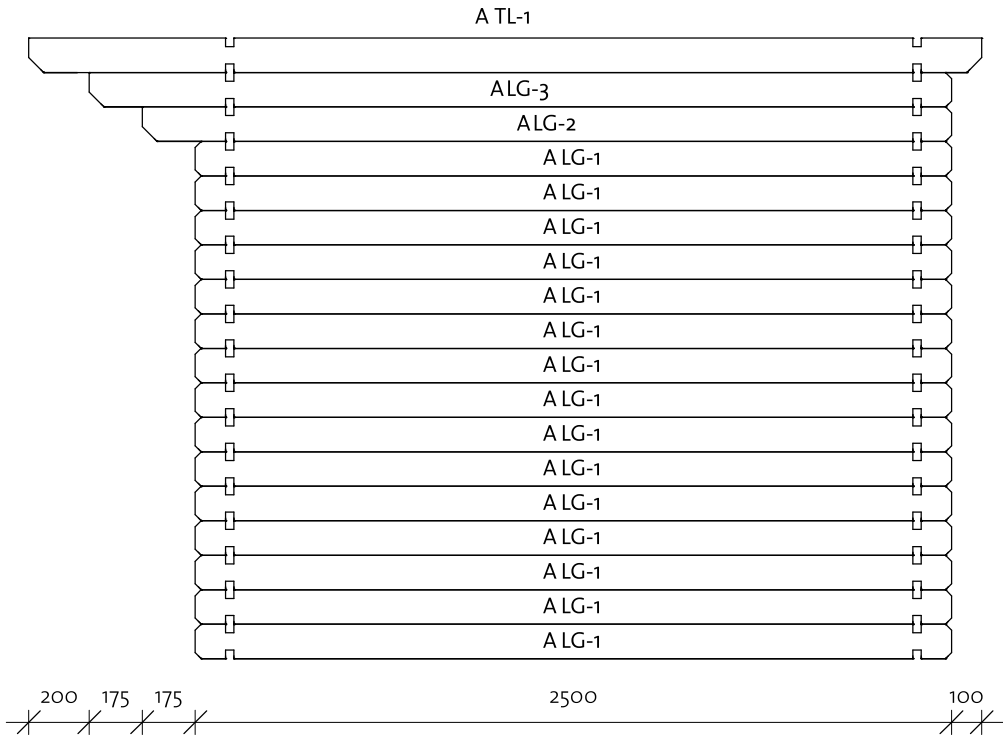


Log Profile Wall A	
Profile	Profile

28x114	
28x114	


KENLY 28 (300x230)

Wall B



Wall B			
Mark	Profile	Count	Cut Length

BLG-1	28x114	15	2500
BLG-2	28x114	1	2675
BLG-3	28x114	1	2850
BTL-1	28x114	1	3150

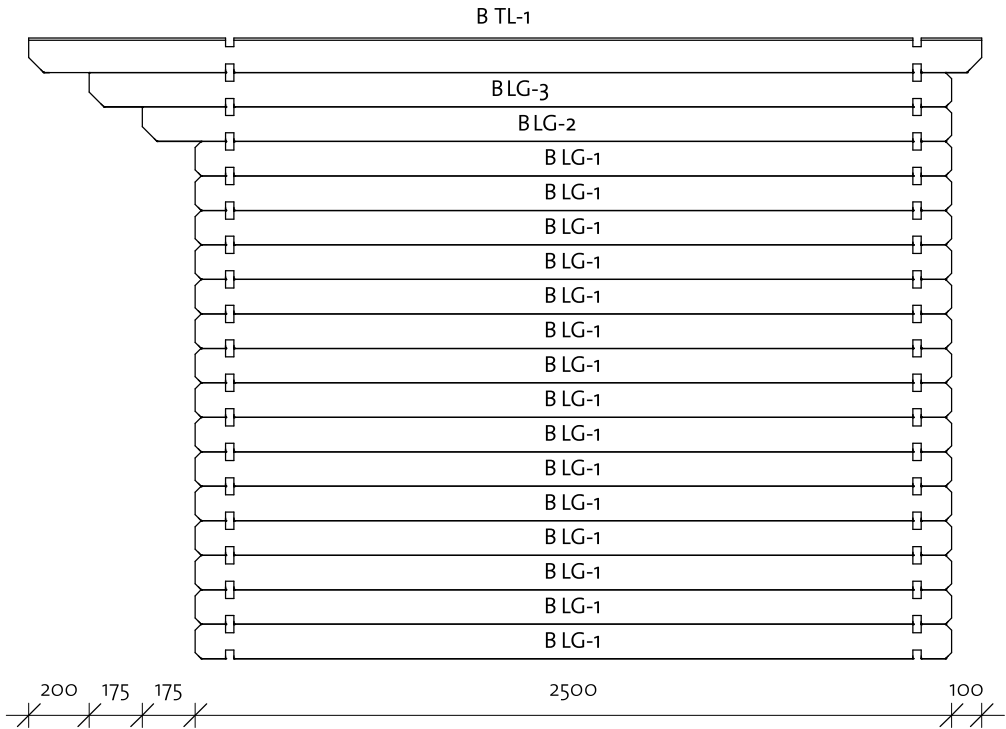


Log Profile Wall B	
Profile	Profile

28x114	
28x114	

KENLY 28 (300X230)

Roof 1

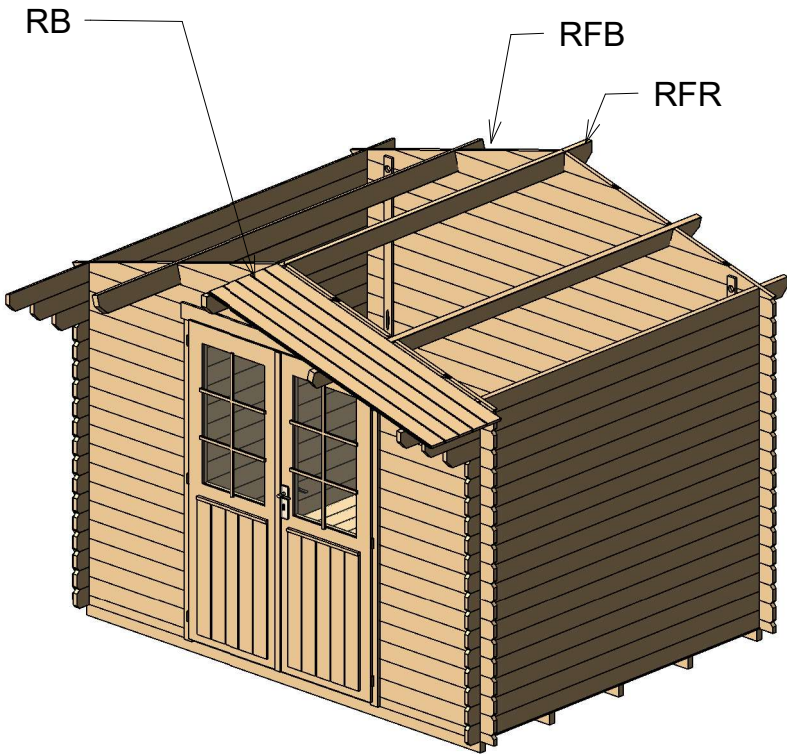

RFR / RFB1 / RFB2				
Mark	Type	Profile	Count	Length





RFB	Beam 40X120		2	3150
RFR	Beam 40X120		1	3150

Roof				
Mark	Type	Profile	Count	Length

RB	17X114		58	1757
----	--------	---	----	------

KENLY 28 (300X230)


Roof 2

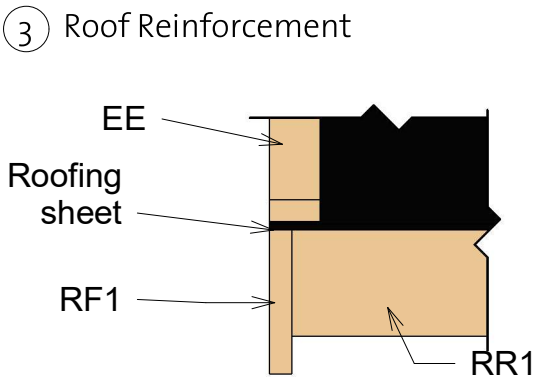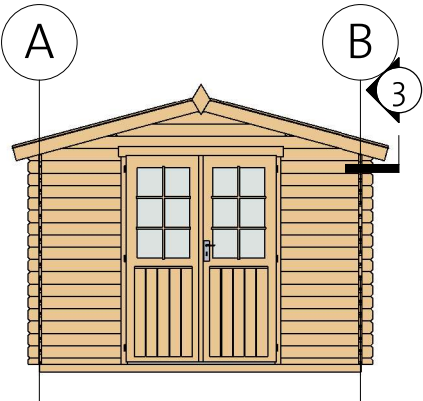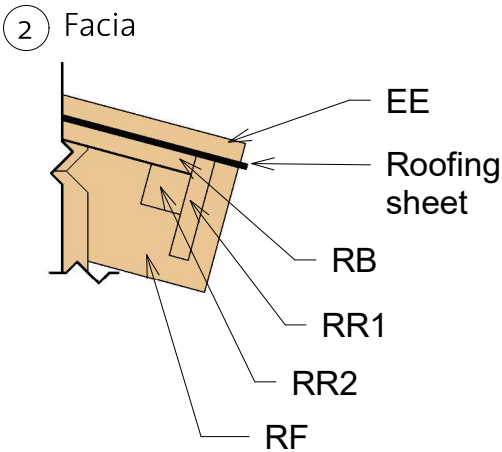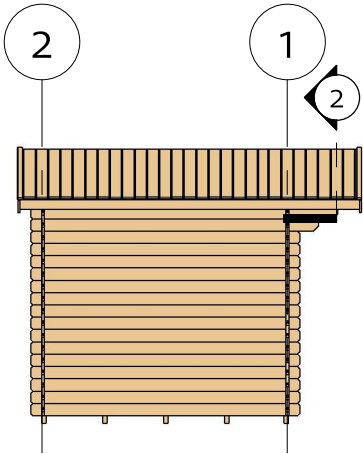

Fascia Schedule				
Mark	Type	Profile	Count	Length
EE	Eave Edging 18x40		4	1802
RF	Roof Fascia 18x120		4	1802
RR1	Roof reinforcement 18x95		2	3150
RR2	Roof reinforcement 38x38		2	3150

KENLY 28 (300X230)

Extras

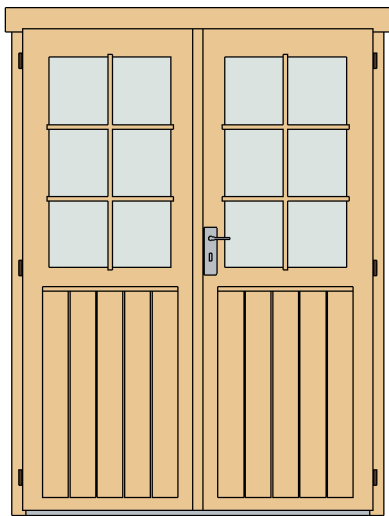

Door Schedule				
Mark	Type	Width	Height	Count

BDD1	Basic double door 1	1425	1955	1
------	---------------------	------	------	---

DCB6	Door Crossbar 6	--	--	2
------	-----------------	----	----	---



Type	Count	length
------	-------	--------

Windboard 18x40	4	2200
-----------------	---	------

Fasteners/Extras		
	Type	Count

Hitblock	300-400 mm	
Screws	5,0 x 70	10
Bolts	M8 x 60	12
Screws	6,0 x 140	30
Nails	1,4 x 40	30
Screws	4,0 x 40	410

Family	Count
--------	-------

Romb	2
------	---



91811132_220603

KENLY 28 (300x230)

List of all items 1

Impregnated foundation beams

Mark	Type	Profile	Count	Length
------	------	---------	-------	--------

IFB	IFB 40x70		5	2990
-----	--------------	---	---	------

Floor Schedule

Mark	Type	Profile	Count	Length
------	------	---------	-------	--------

FB	FB 17x114		27	2241
----	-----------	---	----	------

BB1	BB 20x40		2	3000
-----	-------------	---	---	------

BB2	BB 20x40		2	2300
-----	-------------	--	---	------

Roof

Mark	Type	Profile	Count	Length
------	------	---------	-------	--------

RB	17x114		58	1757
----	--------	---	----	------

RFR / RFB1 / RFB2

Mark	Type	Profile	Count	Length
------	------	---------	-------	--------

RFB	Beam 40x120		2	3150
-----	----------------	---	---	------

RFR	Beam 40x120		1	3150
-----	----------------	---	---	------

Fascia Schedule

Mark	Type	Profile	Count	Length
------	------	---------	-------	--------

EE	Eave Edging 18x40		4	1802
----	----------------------	---	---	------

RF	Roof Fascia 18x120		4	1802
----	-----------------------	---	---	------

RR1	Roof reinforcement 18x95		2	3150
-----	--------------------------------	---	---	------

RR2	Roof reinforcement 38x38		2	3150
-----	--------------------------------	---	---	------

KENLY 28 (300x230)

List of all items 2

Wall 1			
Mark	Profile	Count	Cut Length

1BL-1	28x57	2	880
1LG-1*	28x114	1	843
1LG-2*	28x114	1	1618
1LG-3*	28x114	1	2524
1LG-4	28x114	34	880
1LG-5*	28x114	1	3200

Wall 2			
Mark	Profile	Count	Cut Length

2BL-1	28x57	1	3200
2LG-1*	28x114	1	843
2LG-2*	28x114	1	1618
2LG-3*	28x114	1	2524
2LG-4	28x114	17	3200
2LG-5*	28x114	1	3200

*Gable-delivered premounted

Wall A			
Mark	Profile	Count	Cut Length

ALG-1	28x114	15	2500
ALG-2	28x114	1	2675
ALG-3	28x114	1	2850
ATL-1	28x114	1	3150


Wall B			
Mark	Profile	Count	Cut Length

BLG-1	28x114	15	2500
BLG-2	28x114	1	2675
BLG-3	28x114	1	2850
BTL-1	28x114	1	3150

Log Profiles	
Profile	Profile

28x57	
28x114	

Log Profiles	
Profile	Profile

28x114	
--------	---