

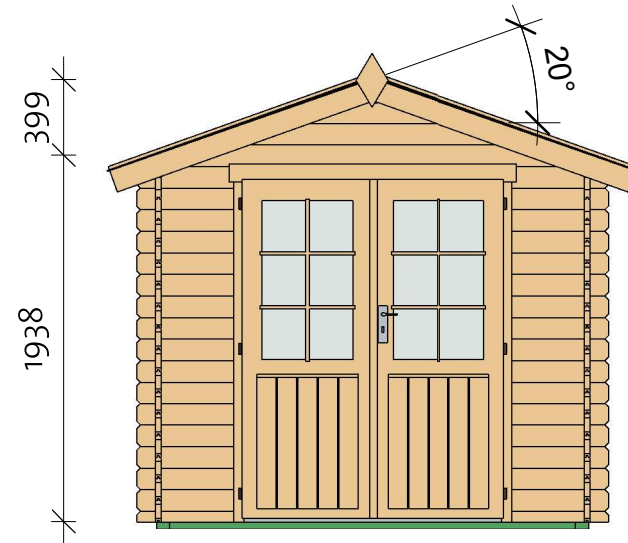


Lily 28 (230x230)

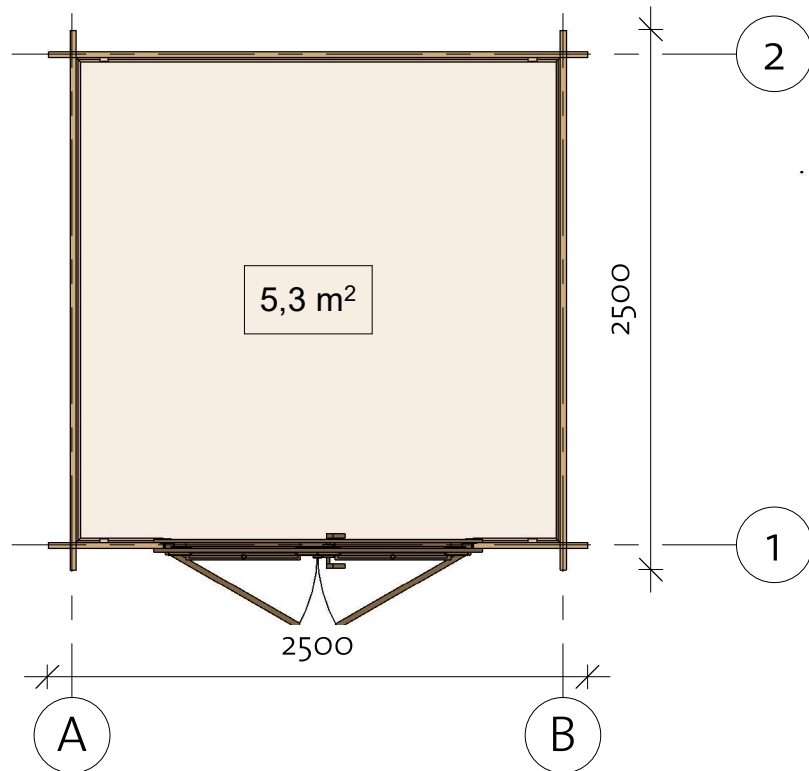

Lily 28 (230x230)

Foundation

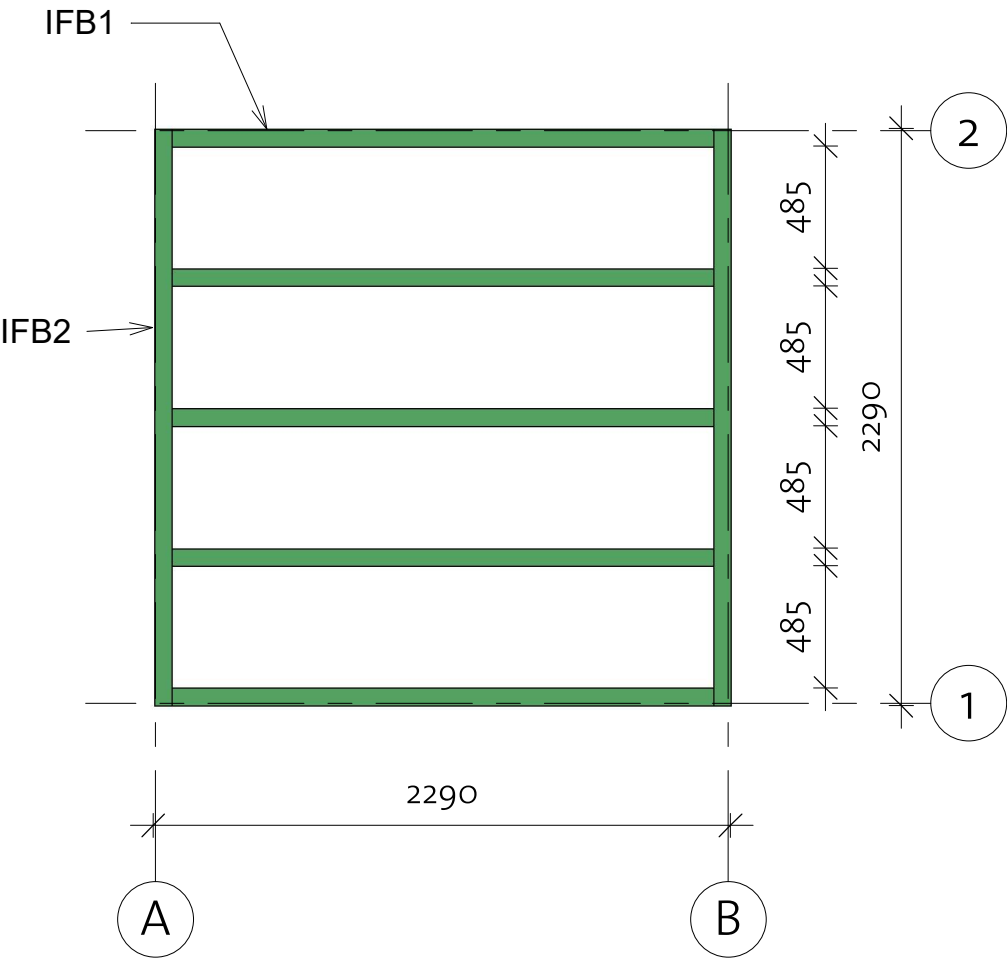


Impregnated foundation beams				
Mark	Type	Profile	Count	Length
IFB1	IFB 70x40		5	2150
IFB2	IFB 70x40		2	2290


Lily 28 (230x230)

Floor Plan

① Baseboard


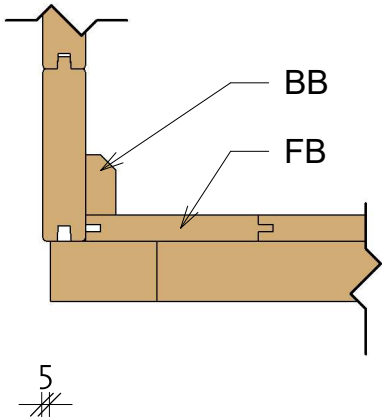


Floor Schedule				
Mark	Type	Profile	Count	Length
FB	FB 17x114		21	2241
BB	BB 20x40		4	2300

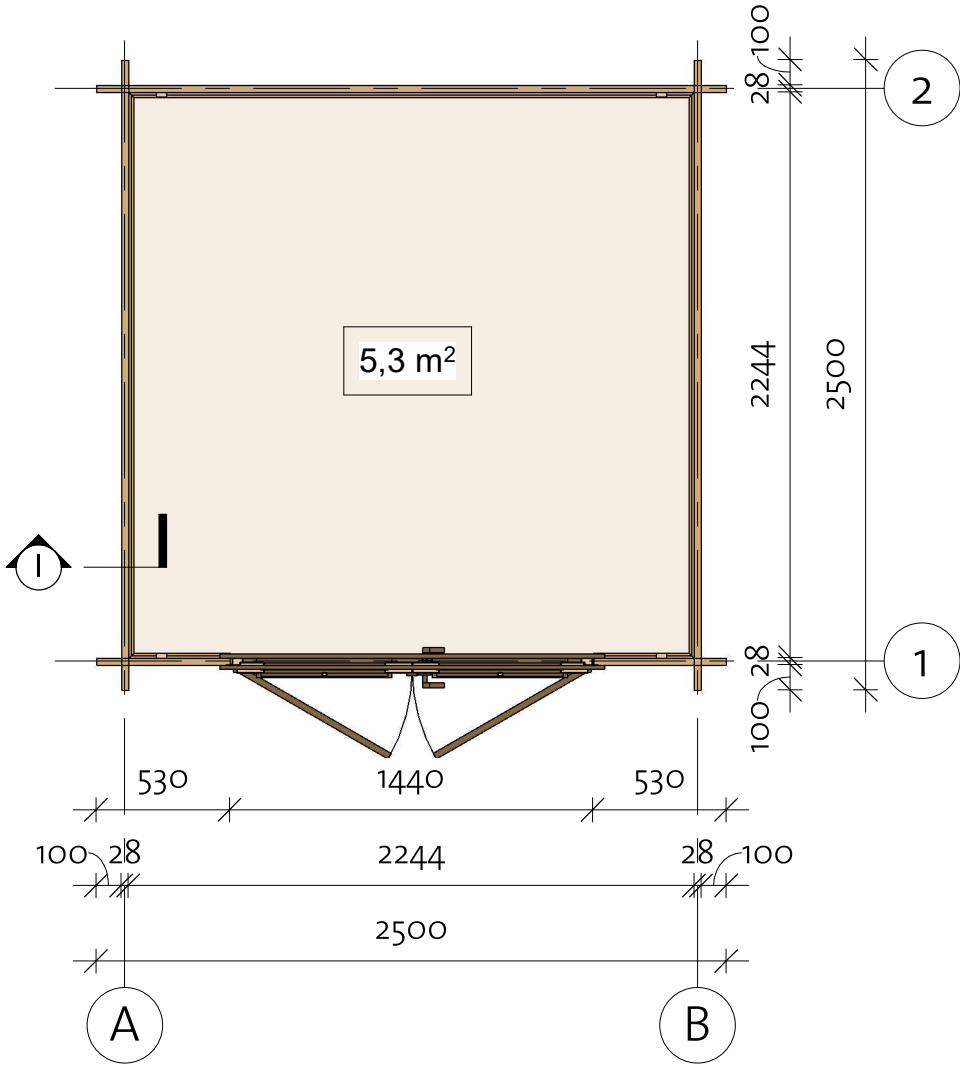

Lily 28 (230x230)

Wall 1

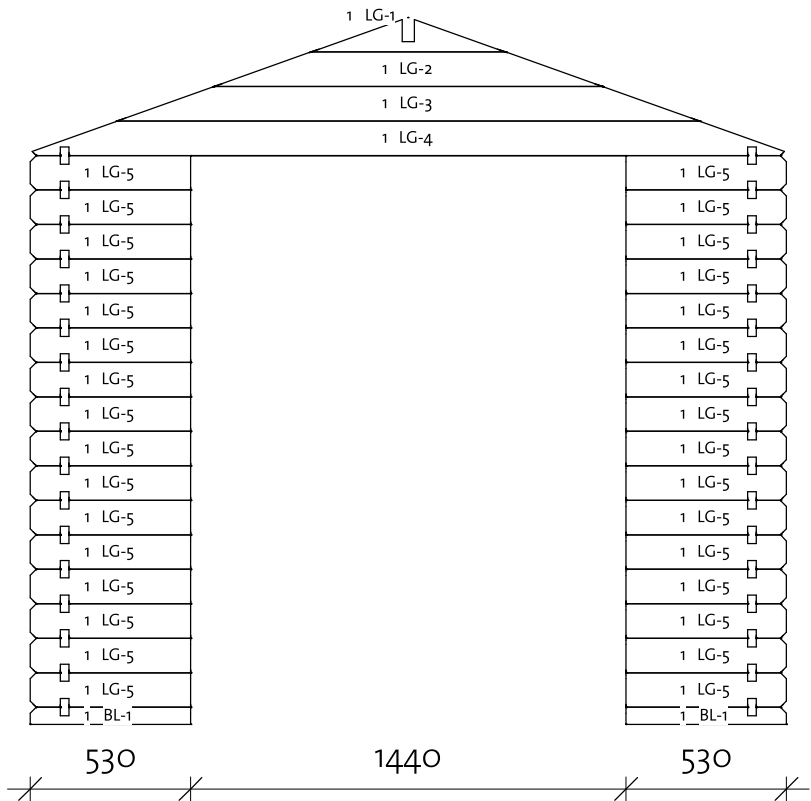

Wall 1			
Mark	Profile	Count	Cut Length



1BL-1	28x57	2	530
1LG-1 *	28x114	1	644
1LG-2 *	28x114	1	1284
1LG-3 *	28x114	1	1924
1LG-4 *	28x114	1	2487
1LG-5	28x114	32	530

* Gable - delivered premounted

Log Profile Wall 1	
Profile	Profile

28x57	
28x114	

Wall 2

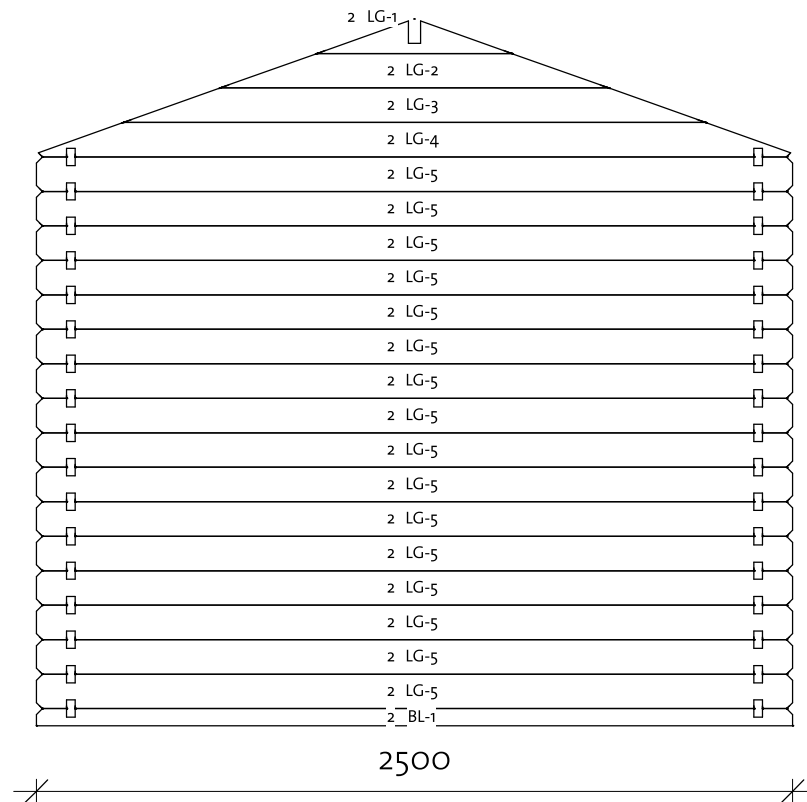

Wall 2			
Mark	Profile	Count	Cut Length

2BL-1	28x57	1	2500
2LG-1*	28x114	1	644
2LG-2*	28x114	1	1284
2LG-3*	28x114	1	1924
2LG-4*	28x114	1	2487
2LG-5	28x114	16	2500


* Gable - delivered premounted

Log Profile Wall 2	
Profile	Profile

28x57	
28x114	


Lily 28 (230x230)

Wall A



Wall A			
Mark	Profile	Count	Cut Length

ALG-1	28x114	14	2500
ALG-2	28x114	1	2700
ALG-3	28x114	1	3000
ATL-1	28x114	1	3400

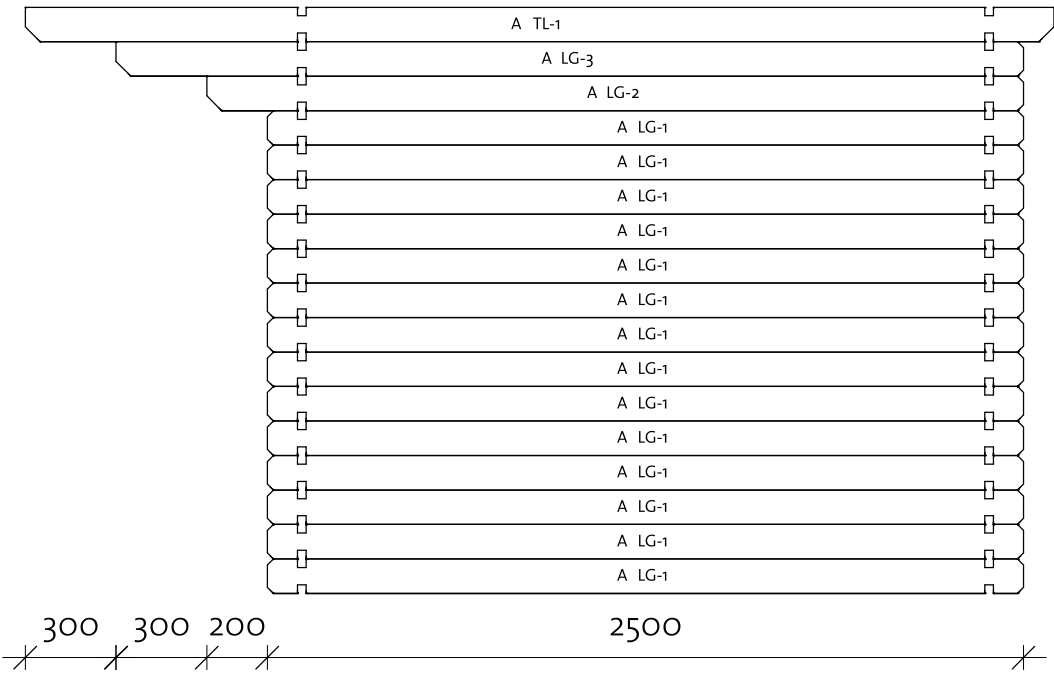


Log Profile Wall A	
Profile	Profile

28x114	
28x114	


Lily 28 (230x230)

Wall B




Wall B			
Mark	Profile	Count	Cut Length

BLG-1	28x114	14	2500
BLG-2	28x114	1	2700
BLG-3	28x114	1	3000
BTL-1	28x114	1	3400

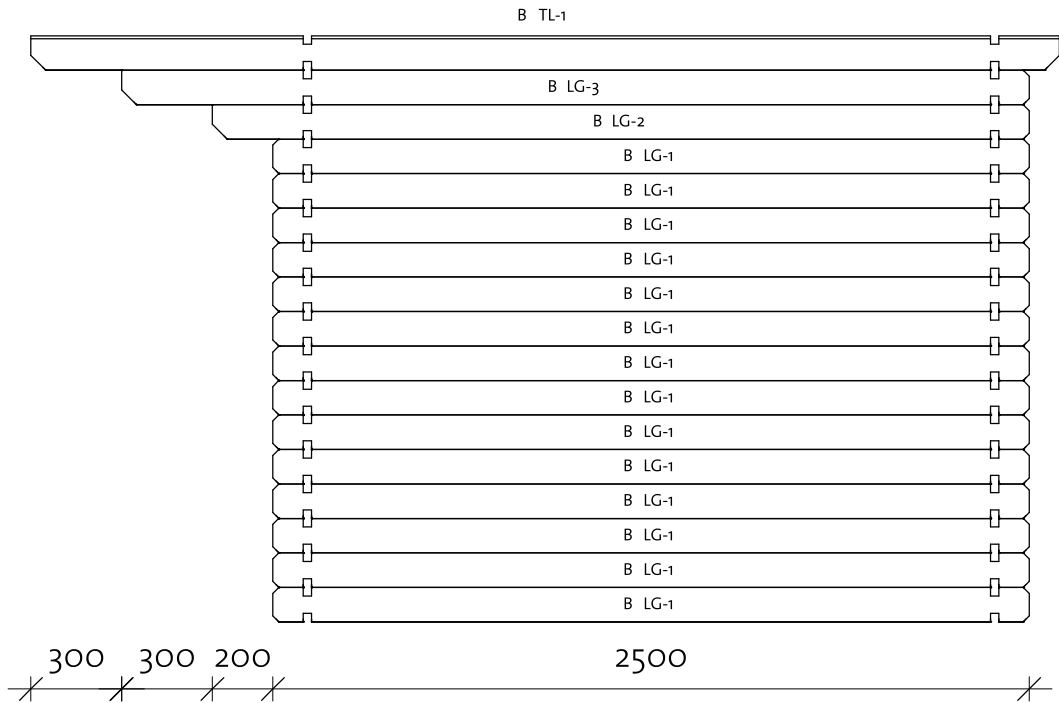


Log Profile Wall B	
Profile	Profile

28x114	
28x114	

Lily 28 (230x230)




Roof 1

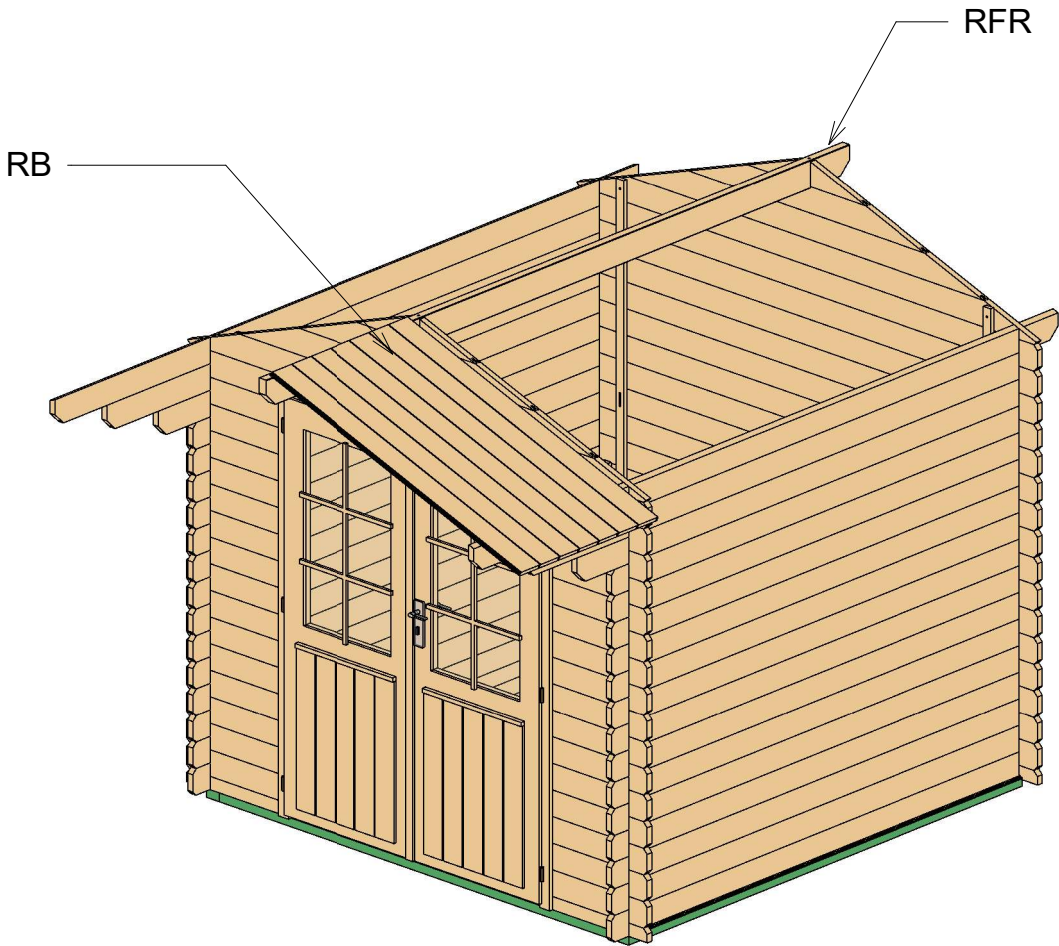


Roof				
Mark	Type	Profile	Count	Length
RFR	Ridge 40x120		1	3400
RB	17x114		62	1438

Lily 28 (230x230)

Roof 2

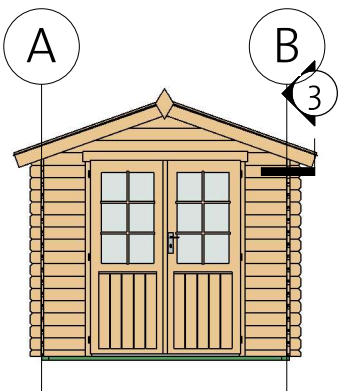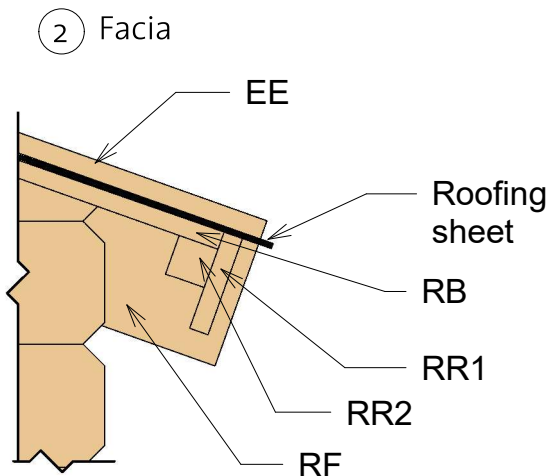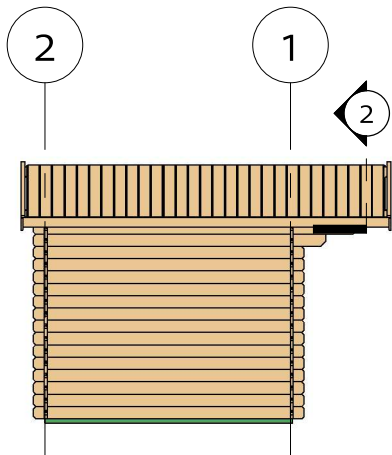


3 Roof Reinforcement

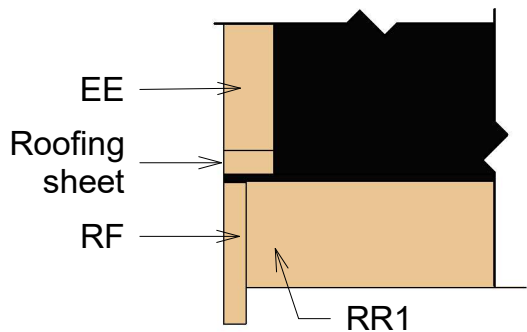

Fascia Schedule				
Mark	Type	Profile	Count	Length
EE	Eave Edging 18x40		4	1478
RF	Roof Fascia 18x120		4	1478
RR1	Roof reinforcement 18x95		2	3400
RR2	Roof reinforcement 38x38		2	3400

Lily 28 (230x230)

Extras

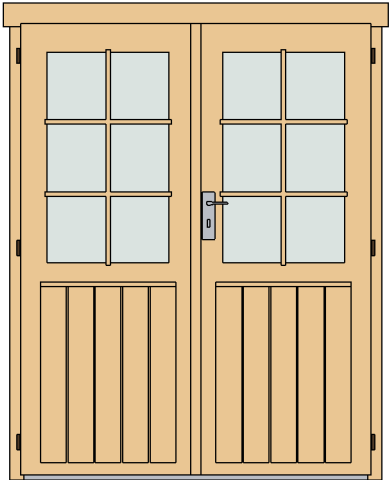

Door Schedule				
Mark	Type	Width	Height	Count
BDD5R	Basic double door 5 right	1425	1835	1
DCB6	Door Crossbar 6	--	--	2

Fasteners & Extras		
Name	Type	Count

Hitblock	300-400 mm	
Screws	5,0 x 70	10
Bolts	M8 x 60	12
Screws	6,0 x 140	30
Nails	1,4 x 40	30
Screws	4,0 x 40	320

Family	Count
Romb	2



Type	Count	Length
Windboard 18x40	4	2200



Lily 28 (230x230)

List of all items 1

Impregnated foundation beams

Mark	Type	Profile	Count	Length
------	------	---------	-------	--------

IFB1	IFB 70x40		5	2150
IFB2	IFB 70x40		2	2290

Floor Schedule

Mark	Type	Profile	Count	Length
------	------	---------	-------	--------

FB	FB 17x114		21	2241
----	-----------	---	----	------

BB	BB 20x40		4	2300
----	-------------	---	---	------

Roof

Mark	Type	Profile	Count	Length
------	------	---------	-------	--------

RFR	Ridge 40x120		1	3400
RB	17x114		62	1438

Fascia Schedule

Mark	Type	Profile	Count	Length
------	------	---------	-------	--------

EE	Eave Edging 18x40		4	1478
RF	Roof Fascia 18x120		4	1478
RR1	Roof reinforcement 18x95		2	3400
RR2	Roof reinforcement 38x38		2	3400

Lily 28 (230x230)

List of all items 2

Wall 1			
Mark	Profile	Count	Cut Length

1BL-1	28x57	2	530
1LG-1*	28x114	1	644
1LG-2*	28x114	1	1284
1LG-3*	28x114	1	1924
1LG-4*	28x114	1	2487
1LG-5	28x114	32	530

Wall 2			
Mark	Profile	Count	Cut Length

2BL-1	28x57	1	2500
2LG-1*	28x114	1	644
2LG-2*	28x114	1	1284
2LG-3*	28x114	1	1924
2LG-4*	28x114	1	2487
2LG-5	28x114	16	2500

* Gable - delivered premounted

Wall A			
Mark	Profile	Count	Cut Length

ALG-1	28x114	14	2500
ALG-2	28x114	1	2700
ALG-3	28x114	1	3000
ATL-1	28x114	1	3400


Wall B			
Mark	Profile	Count	Cut Length

BLG-1	28x114	14	2500
BLG-2	28x114	1	2700
BLG-3	28x114	1	3000
BTL-1	28x114	1	3400

Log Profiles	
Profile	Profile

28x57	
28x114	

Log Profiles	
Profile	Profile

28x114	
--------	---