

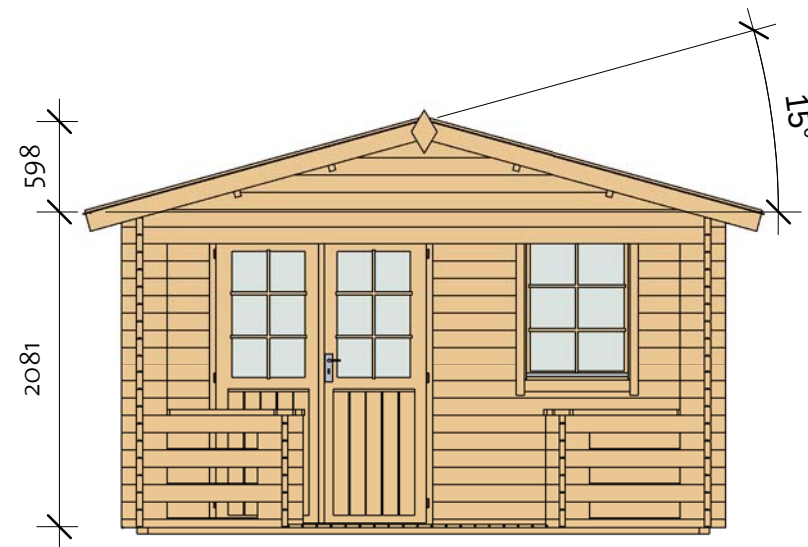


Lund 40 (380x575)

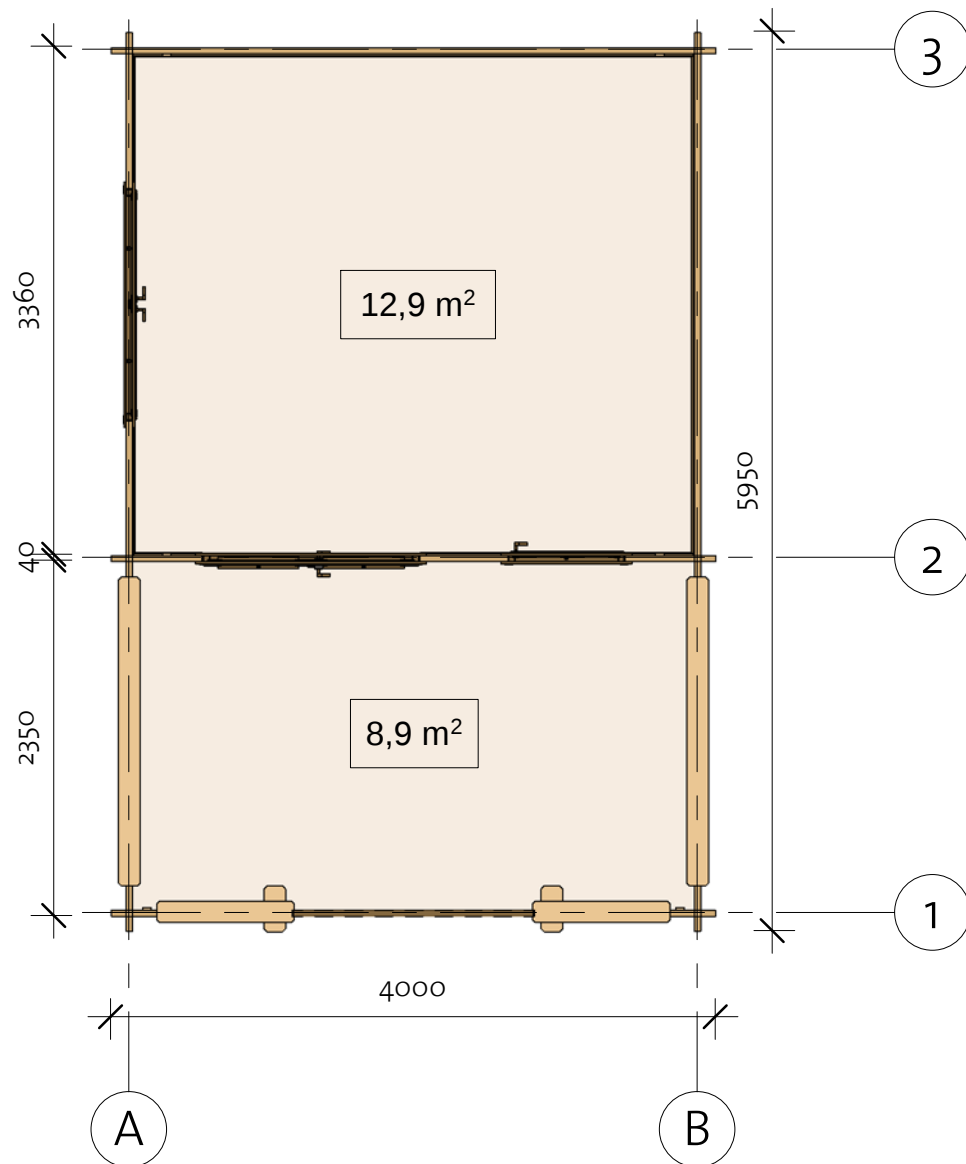

Foundation




Impregnated foundation beams				
Mark	Type	Profile	Count	Length
IFB1	IFB 70x40		2	5740
IFB2	IFB 70x40		12	3650
IFB3	IFB 70x40		2	487

Lund 40 (380x575)

Floor Plan

① Baseboard

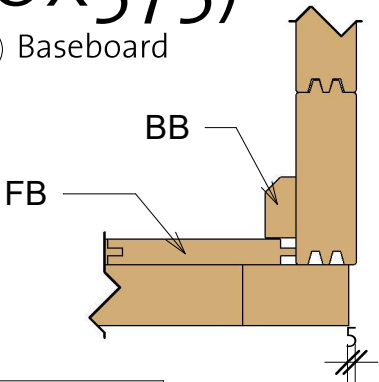


Floor Schedule				
Mark	Type	Profile	Count	Length
FB	FB 17x114		34	3316
TB1	TB 21x95		21	2310
TB2	TB 21x95		18	2350
BB1	BB 20x40		2	3800
BB2	BB 20x40		2	3400



FB
Floorboard

TB 1
Terrace board

TB 2
Terrace board

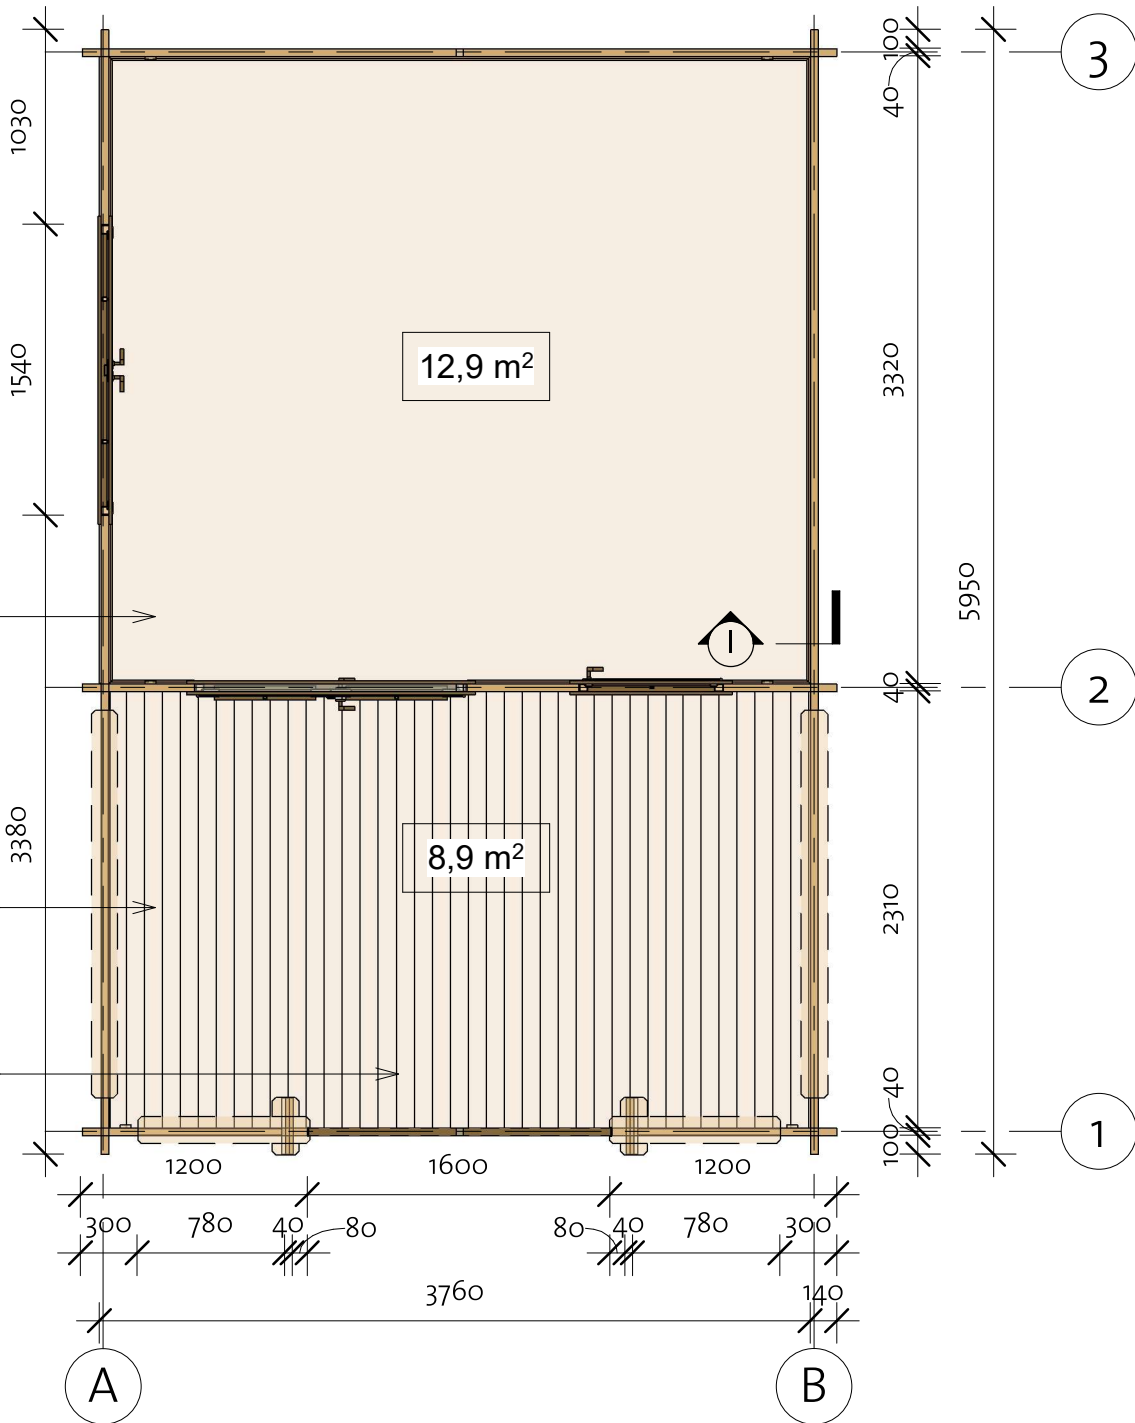

Wall 1

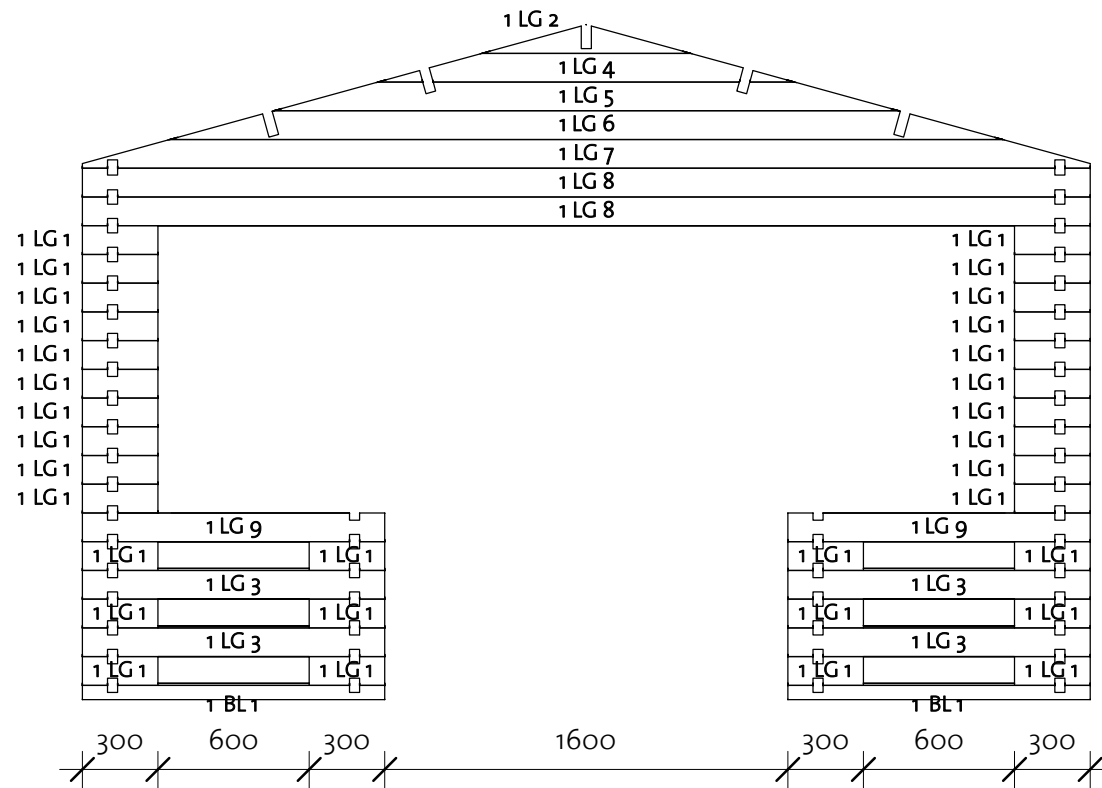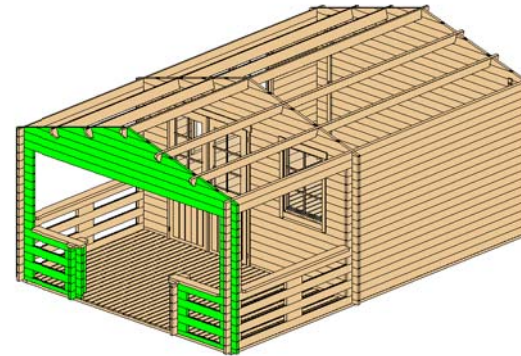

Wall 1			
Mark	Profile	Count	Cut Length

1BL 1	40X57	2	1200
1LG 1	40X114	32	300
1LG 2*	40X114	1	828
1LG 3	40X114	4	1200
1LG 4*	40X114	1	1654
1LG 5*	40X114	1	2481
1LG 6*	40X114	1	3307
1LG 7*	40X114	1	4000
1LG 8	40X114	2	4000
1LG 9	40X114	2	1200



* Gable - delivered premounted

Log Profile Wall 1	
Profile	Profile

40x57	
40x114	

Lund 40 (380x575)

Wall 2

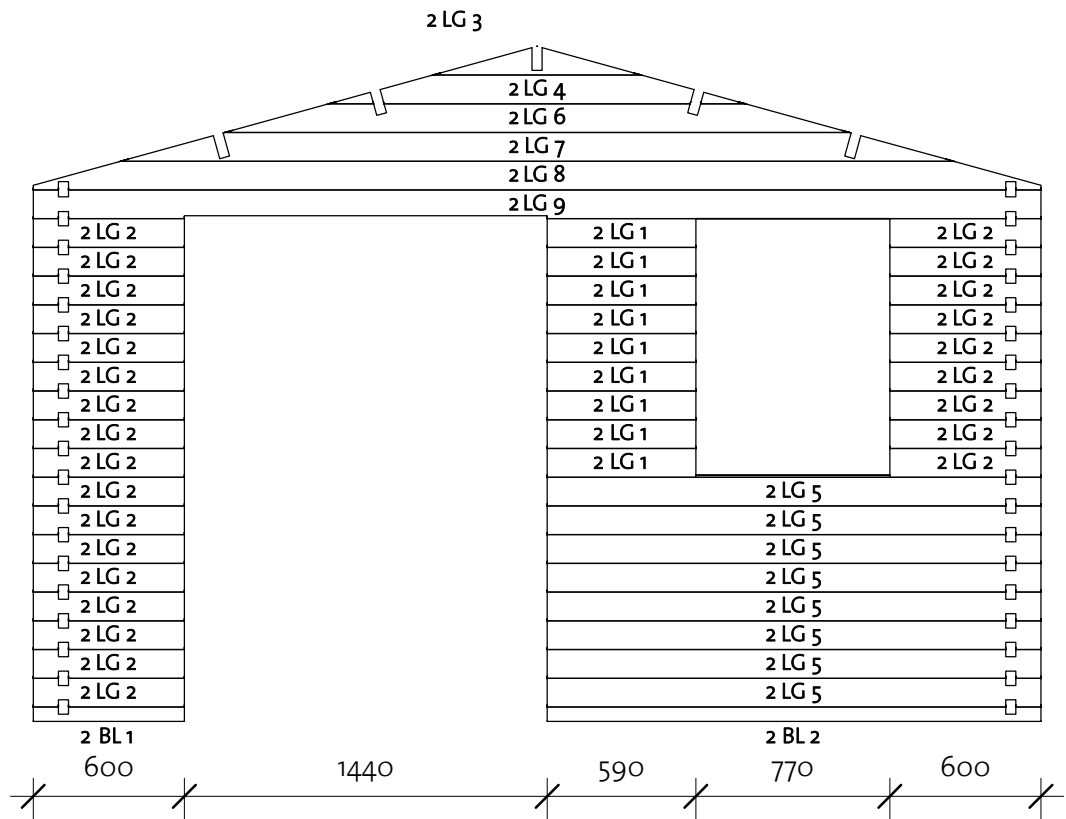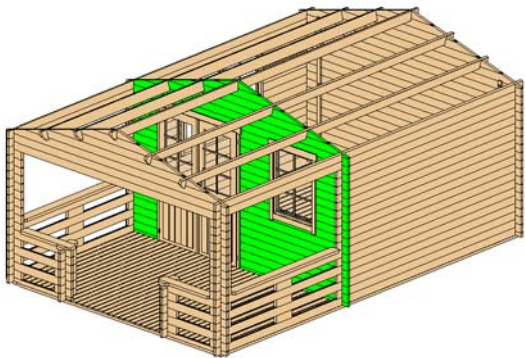

Wall 2			
Mark	Profile	Count	Cut Length

2BL 1	40x57	1	600
2BL 2	40x57	1	1960
2LG 1	40x114	9	590
2LG 2	40x114	26	600
2LG 3*	40x114	1	828
2LG 4*	40x114	1	1654
2LG 5	40x114	8	1960
2LG 6*	40x114	1	2481
2LG 7*	40x114	1	3307
2LG 8*	40x114	1	4000
2LG 9	40x114	1	4000



* Gable - delivered premounted

Log Profile Wall 2	
Profile	Profile

40x57	
40x114	

Lund 40 (380x575)

Wall 3

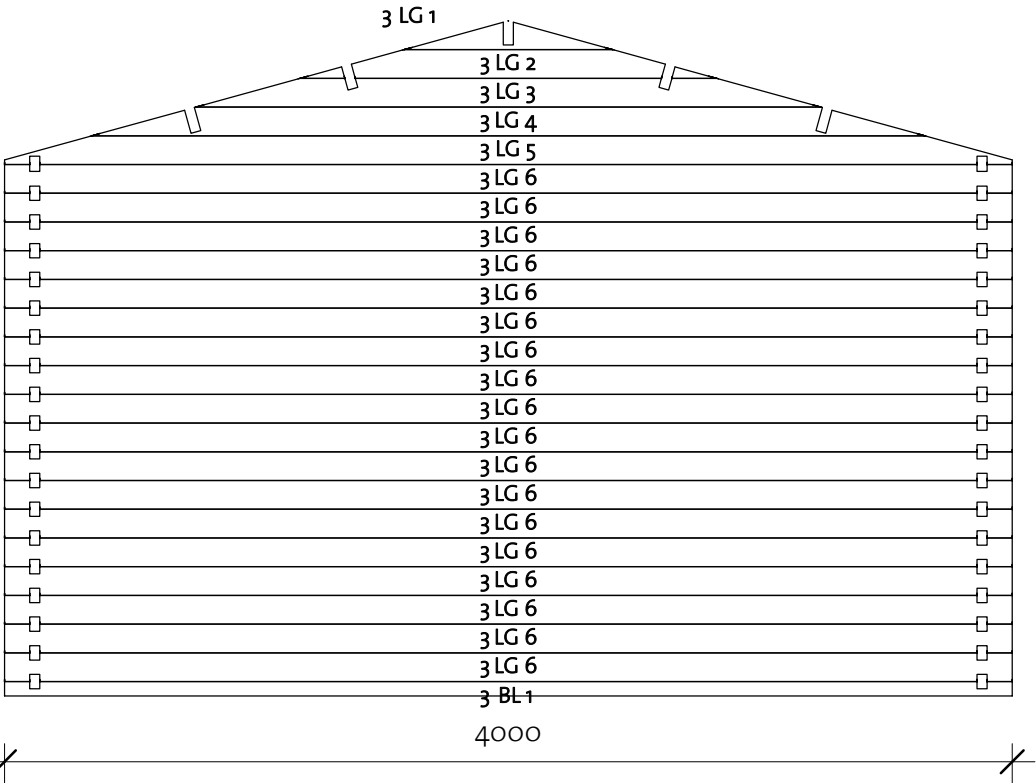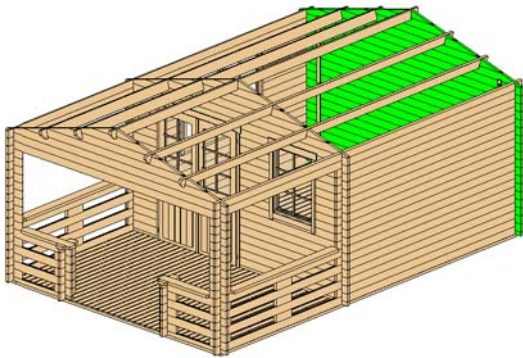

Wall 3			
Mark	Profile	Count	Cut Length


3BL 1	40x57	1	4000
3LG 1*	40x114	1	828
3LG 2*	40x114	1	1654
3LG 3*	40x114	1	2481
3LG 4*	40x114	1	3307
3LG 5*	40x114	1	4000
3LG 6	40x114	18	4000

* Gable - delivered premounted

Log Profile Wall 3	
Profile	Profile

40x57	
40x114	


Wall A



AALG 1	40x114	6	300
AATL 1	40x57	1	300


ALG 1	40x114	13	300
ALG 2	40x114	3	300
ALG 3	40x114	18	1030
ALG 4	40x114	4	3600
ALG 5	40x114	4	5950
ALG 6	40x114	1	5950
ATL 1	40x114	1	5950

40X114	
40X57	
40X114	




Lund 40 (380x575)

Wall B

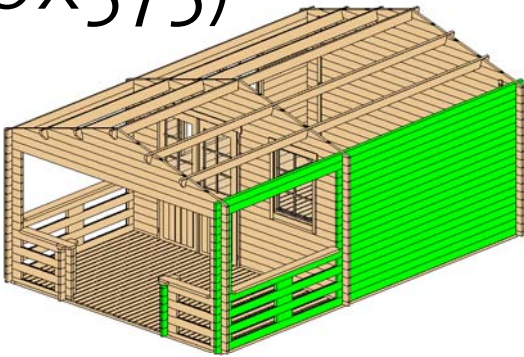


Wall AB			
Mark	Profile	Count	Cut Length

ABLG 1	40x114	6	300
ABTL 1	40x57	1	300



Wall B			
Mark	Profile	Count	Cut Length

BLG 1	40x114	13	300
BLG 2	40x114	3	300
BLG 3	40x114	13	3600
BLG 4	40x114	4	5950
BLG 5	40x114	1	5950
BTL 1	40x114	1	5950

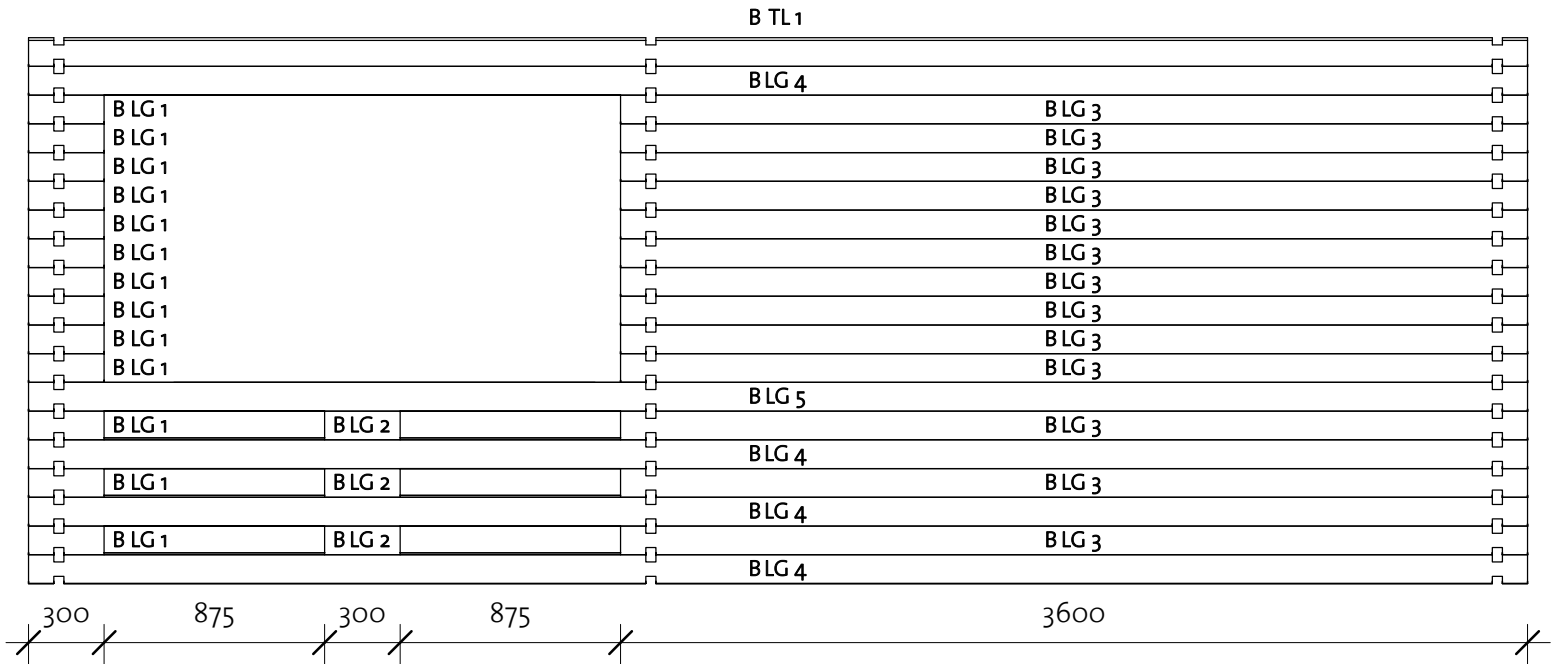


Log Profile Wall B	
Profile	Profile

40x57	
40x114	
40x114	

Lund 40 (380x575)

Roof 1

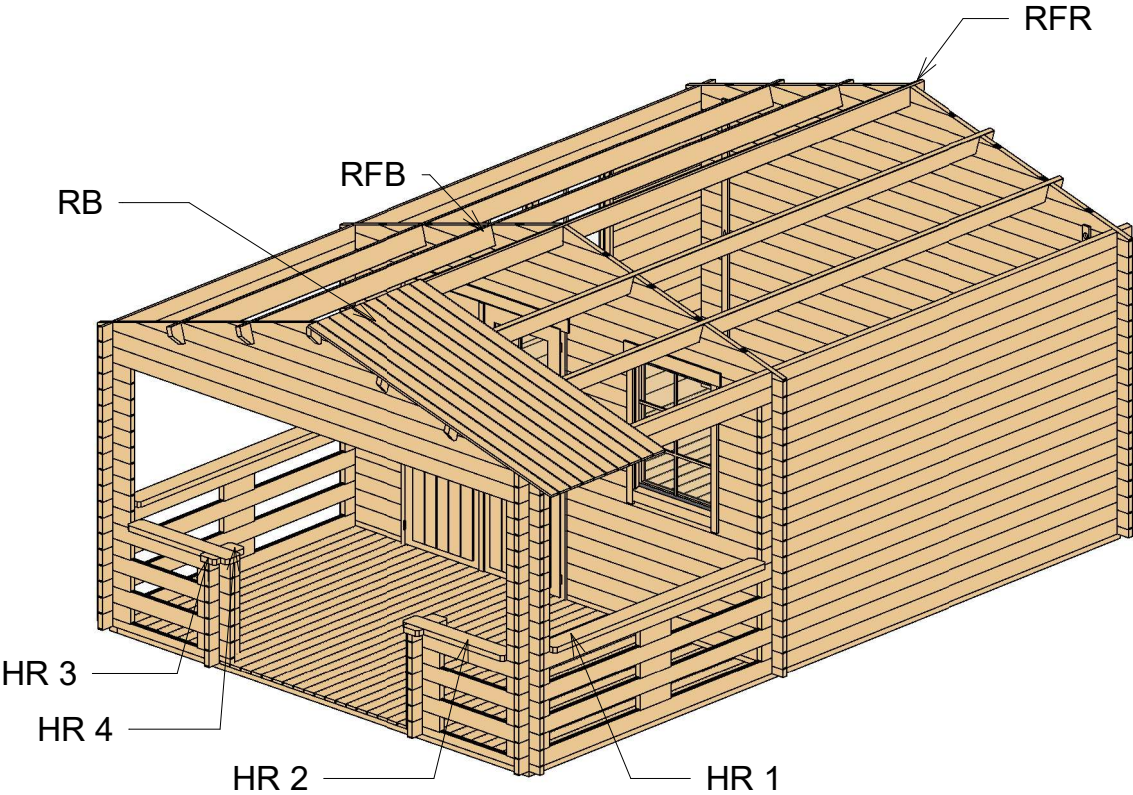





Roof				
Mark	Type	Profile	Count	Length
RFR	Ridge 40X143		1	5950
RFB	Beam 40X143		4	5950
RB	17X114		108	2282

Type	Profile	Count	Length
HR1	40X143	2	2050
HR2	40X143	2	910
HR3	40X143	2	60
HR4	40X143	2	100



Lund 40 (380x575)


Roof 2

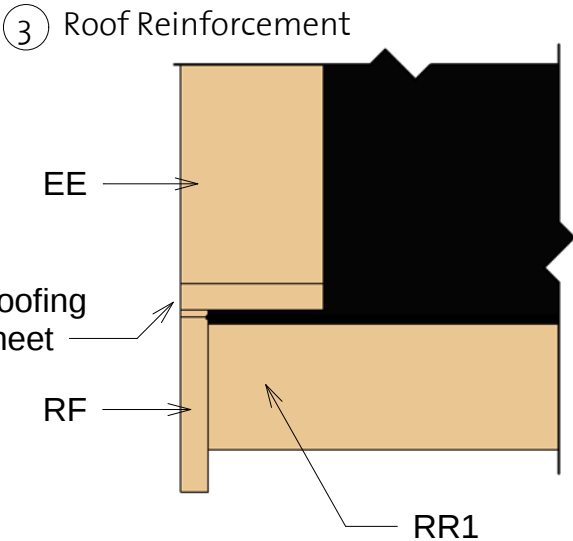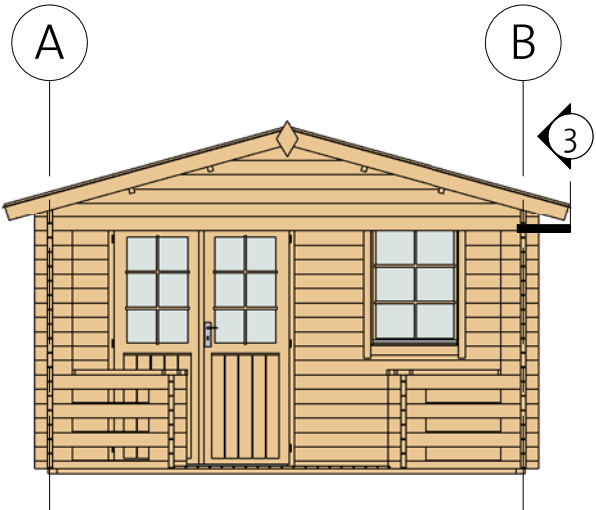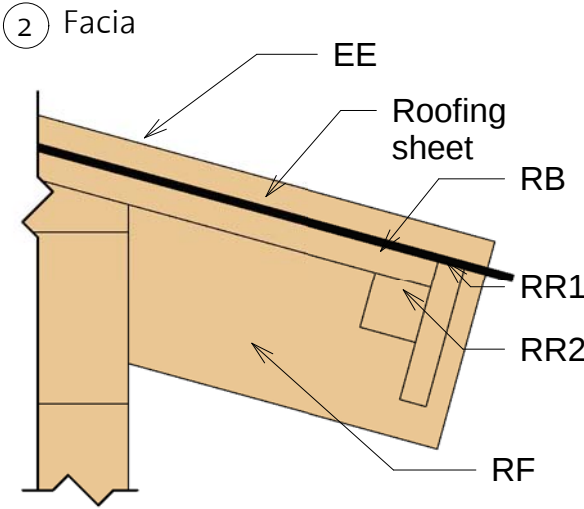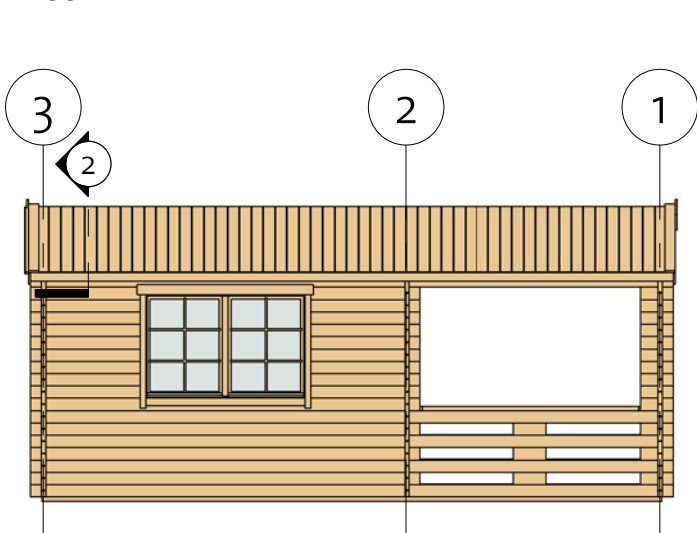


Fascia Schedule				
Mark	Type	Profile	Count	Length
EE	Eave Edging 18x95		4	2320
RF	Facia 18x120		4	2320
RR1	Roof reinforcement 18x95		2	5950
RR2	Roof reinforcement 38x38		2	5950

Lund 40 (380x575)


Extras

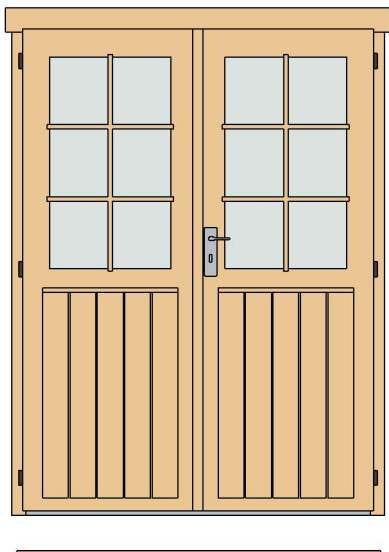

Door Schedule				
Model	Type	Width	Height	Count
CDD1R	Classic double door 1 right	1425	1955	1
DCB6	Door crossbar 6	--	--	2
DB	Door beam 1440 mm	40	12	1



Window Schedule				
Model	Type	Width	Height	Count
CW1L	Classic window 1 left	765	990	1
CDW1	Classic double window 1	1530	990	1
WCB6	Window crossbar 6	--	--	3

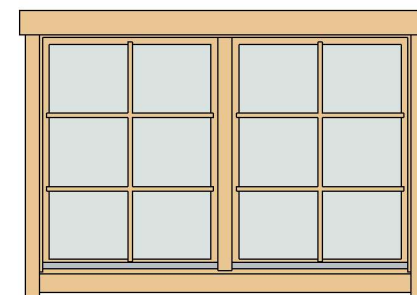

Fasteners/Extras		
Name	Type	Count

Hitblock	300-400 mm	
Screws	5,0 x 70	15
Bolts	M8 x 70	18
Nails	1,4 x 40	35
Screws	4,0 x 40	120
Screws	6,0 x 140	120
Screws	4,0 x 50	950



Type	Count	Lenght
Windboard 18x40	6	2200



Type	Count
------	-------

Romb	2
------	---

4200029_190913

Lund 40 (380x575)

List of all items 1

Impregnated foundation beams

Mark	Type	Profile	Count	Length
------	------	---------	-------	--------

IFB1	IFB 70x40		2	5740
IFB2	IFB 70x40		12	3650
IFB3	IFB 70x40		2	487

Floor Schedule

Mark	Type	Profile	Count	Length
------	------	---------	-------	--------

FB	FB 17x114		34	3316
TB1	TB 21x95		21	2310
TB2	TB 21x95		18	2350

BB1	BB 20x40		2	3800
BB2	BB 20x40		2	3400

Fascia Schedule

Mark	Type	Profile	Count	Length
------	------	---------	-------	--------

EE	Eave Edging 18x95		4	2320
RF	Facia 18x120		4	2320
RR1	Roof reinforcement 18x95		2	5950
RR2	Roof reinforcement 38x38		2	5950

Roof

Mark	Type	Profile	Count	Length
------	------	---------	-------	--------

RFR	Ridge 40x143		1	5950
RFB	Beam 40x143		4	5950
RB	17x114		108	2282

Lund 40 (380x575)

List of all items 2

Wall 1			
Mark	Profile	Count	Cut Length

1BL 1	40x57	2	1200
1LG 1	40x114	32	300
1LG 2*	40x114	1	828
1LG 3	40x114	4	1200
1LG 4*	40x114	1	1654
1LG 5*	40x114	1	2481
1LG 6*	40x114	1	3307
1LG 7*	40x114	1	4000
1LG 8	40x114	2	4000
1LG 9	40x114	2	1200

Wall 2			
Mark	Profile	Count	Cut Length


2BL 1	40x57	1	600
2BL 2	40x57	1	1960
2LG 1	40x114	9	590
2LG 2	40x114	26	600
2LG 3*	40x114	1	828
2LG 4*	40x114	1	1654
2LG 5	40x114	8	1960
2LG 6*	40x114	1	2481
2LG 7*	40x114	1	3307
2LG 8*	40x114	1	4000
2LG 9	40x114	1	4000

*Gable-delivered premounted

Wall 3			
Mark	Profile	Count	Cut Length

3BL 1	40x57	1	4000
3LG 1*	40x114	1	828
3LG 2*	40x114	1	1654
3LG 3*	40x114	1	2481
3LG 4*	40x114	1	3307
3LG 5*	40x114	1	4000
3LG 6	40x114	18	4000

Log Profiles 1	
Profile	Profile

40x57	
40x114	

Lund 40 (380x575)

List of all items 3

Wall A

Mark	Profile	Count	Cut Length
------	---------	-------	------------

ALG 1	40x114	13	300
ALG 2	40x114	3	300
ALG 3	40x114	18	1030
ALG 4	40x114	4	3600
ALG 5	40x114	4	5950
ALG 6	40x114	1	5950
ATL 1	40x114	1	5950

Wall B

Mark	Profile	Count	Cut Length
------	---------	-------	------------

BLG 1	40x114	13	300
BLG 2	40x114	3	300
BLG 3	40x114	13	3600
BLG 4	40x114	4	5950
BLG 5	40x114	1	5950
BTL 1	40x114	1	5950

Wall AA

Mark	Profile	Count	Cut Length
------	---------	-------	------------

AALG 1	40x114	6	300
AATL 1	40x57	1	300

Wall AB

Mark	Profile	Count	Cut Length
------	---------	-------	------------

ABLG 1	40x114	6	300
ABTL 1	40x57	1	300


Log Profiles 2

Profile	Profile
---------	---------

40x114



40x114



40x57



Type

Profile

Count

Length

HR1	40x143	2	2050
HR2	40x143	2	910
HR3	40x143	2	60
HR4	40x143	2	100